


Ventilation Assessment Summary

Ventilation Assessment

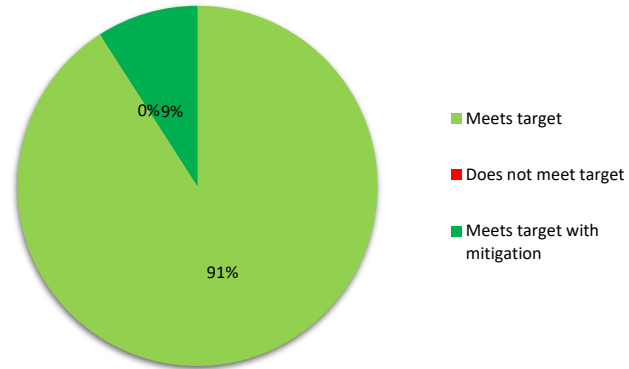

#	HVAC		Site		Air Changes			Recommendation		Mitigation
	Room	Type	Campus	Building	Target	Actual	Result	Min. CADR	Min. Supply	Applied CADR
1	E101	Office	Laney College	E	3	4.5	Meets target	0	162	0
2	E121	Classroom	Laney College	E	3	7.2	Meets target	0	939	0
3	E103	Office	Laney College	E	3	4.2	Meets target	0	391	0
4	E105	Lecture Room	Laney College	E	3	4.9	Meets target	0	709	0
5	E116	Classroom	Laney College	E	3	8.2	Meets target	0	418	0
6	E102	Kitchen	Laney College	E	3	21.1	Meets target	0	1392	0
7	E107	Office	Laney College	E	3	3.3	Meets target	0	58	0
8	E123	Occupiable Storage (Dry)	Laney College	E	3	5.6	Meets target	0	134	0
9	E122	Office	Laney College	E	3	6.9	Meets target	0	84	0
10	E130A	Locker Room	Laney College	E	3	6.1	Meets target	0	81	0
11	E131	Office	Laney College	E	3	6.7	Meets target with mitigation	103	114	230