


Ventilation Assessment Summary

Ventilation Assessment

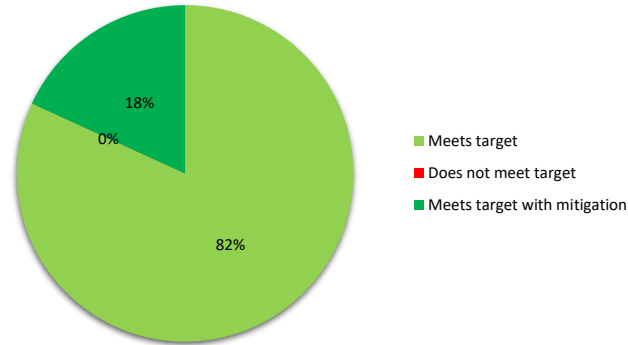

#	HVAC		Site		Air Changes			Reccommendation		Mitigation
	Room	Type	Campus	Building	Target	Actual	Result	Min. CADR	Min. Supply	Applied CADR
1	315	Office	Laney College	Tower	3	10.1	Meets target with mitigation	55	82	230
2	313	Office	Laney College	Tower	3	3.2	Meets target	0	56	0
3	311	Office	Laney College	Tower	3	3.5	Meets target	0	55	0
4	309	Office	Laney College	Tower	3	3.5	Meets target	0	56	0
5	307	Office	Laney College	Tower	3	4.6	Meets target	0	56	0
6	305	Office	Laney College	Tower	3	3.8	Meets target	0	56	0
7	303	Office	Laney College	Tower	3	3.0	Meets target	5	55	0
8	301	Office	Laney College	Tower	3	9.0	Meets target	0	91	0
9	302	Office	Laney College	Tower	3	15.7	Meets target with mitigation	25	53	230
10	304	Office	Laney College	Tower	3	15.5	Meets target with mitigation	19	56	230
12	308	Office	Laney College	Tower	3	15.6	Meets target with mitigation	20	55	230
13	310	Office	Laney College	Tower	3	6.7	Meets target	0	55	0
14	314	Office	Laney College	Tower	3	7.4	Meets target	0	55	0
15	312	Office	Laney College	Tower	3	6.8	Meets target	0	55	0
16	316	Office	Laney College	Tower	3	11.2	Meets target	0	82	0
17	351	Office	Laney College	Tower	3	4.4	Meets target	0	82	0
18	352	Office	Laney College	Tower	3	3.6	Meets target	0	94	0
19	350	Office	Laney College	Tower	3	4.9	Meets target	0	97	0
20	207	Office	Laney College	Tower	3	3.9	Meets target	0	55	0
21	209	Office	Laney College	Tower	3	3.7	Meets target	0	56	0
22	213	Office	Laney College	Tower	3	4.2	Meets target	0	79	0
23	253	Office	Laney College	Tower	3	4.4	Meets target	0	82	0
24	211	Office	Laney College	Tower	3	3.4	Meets target	0	56	0
25	201 - 203	Office	Laney College	Tower	3	3.6	Meets target with mitigation	133	565	230
26	210	Office	Laney College	Tower	3	3.6	Meets target	0	73	0
27	212	Office	Laney College	Tower	3	4.0	Meets target	0	66	0
28	214	Office	Laney College	Tower	3	4.5	Meets target	0	64	0
29	216	Office	Laney College	Tower	3	4.4	Meets target	0	82	0
31	256	Office	Laney College	Tower	3	6.9	Meets target	0	62	0
32	215	Office	Laney College	Tower	3	9.2	Meets target	0	77	0

#	HVAC		Site		Air Changes			Reccomendation		Mitigation
	Room	Type	Campus	Building	Target	Actual	Result	Min. CADR	Min. Supply	Applied CADR
33	Art Gallery	Art Classroom	Laney College	Tower	3	3.2	Meets target	0	627	0
35	3rd Floor Hallway	Lobby	Laney College	Tower	3	3.7	Meets target with mitigation	541	743	690
36	254/255	Office	Laney College	Tower	3	6.8	Meets target	74	74	0