


PUMPS



GD-135Q (QBX) QUINTUPLEX CONTINUOUS DUTY PLUNGER PUMP

SPECIFICATIONS

Maximum BHP	135 (101 kw)
Maximum RPM	500
No. of Plungers	5
Stroke Length	3.5 in. (89 mm)
Plunger Load	5,500 lbs. (2,495 kg)
Discharge Hydrostatic Test Pressure LP	2,960 psi (208 kg/cm ²)
MP	6,250 psi (439 kg/cm ²)
Oil Capacity	10 gal. (58 liters)
Pump Weight	1,875 lbs. (851 kg)

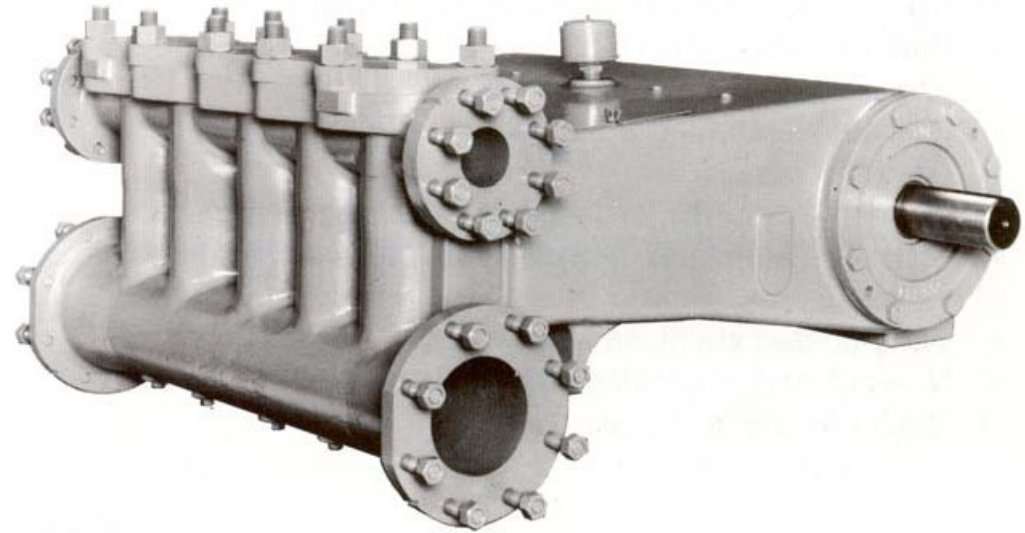

PLUNGER SIZE		MAXIMUM PRESSURE		DISPLACEMENT PER REVOLUTION		GALLONS PER MINUTE/LITERS AT THE FOLLOWING RPM											
						175		200		300		400		450		500	
in.	mm.	PSI	kg/cm ²	gal.	liters	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM	GPM	LPM
Low Pressure Aluminum Bronze (QBXA) Fluid End																	
3	76	780	55	0.536	2.027	94	355	107	405	161	608	214	811	241	912	268	1014
2 3/4	70	925	65	0.450	1.703	79	298	90	341	135	511	180	681	203	767	225	852
2 1/2	64	1120	79	0.372	1.408	65	246	74	282	112	422	149	563	167	634	186	704
2 1/2	57	1385	97	0.301	1.140	53	200	60	228	90	342	120	456	136	513	151	570
2	51	1480	104	0.238	0.901	42	158	48	180	71	270	95	360	107	405	119	450
Medium Pressure Aluminum Bronze (QBXB) Fluid End																	
2 1/4	57	1385	97	0.301	1.140	53	200	60	228	90	342	120	456	136	513	151	570
2	51	1750	123	0.238	0.901	42	158	48	180	71	270	95	360	107	405	119	450
1 3/4	45	2285	161	0.182	0.690	32	121	36	138	55	207	73	276	82	310	91	345
1 1/2	38	3110	219	0.134	0.507	23	89	27	101	40	152	54	203	60	228	67	253

Based on 90% mechanical efficiency and 100% volumetric efficiency.
For applications within shaded area contact Customer Service.

Specifications subject to change without notice.

GD-135Q (QBX) QUINTUPLEX CONTINUOUS DUTY PLUNGER PUMP

STANDARD FEATURES

- Oil level gauge
- Crankshaft type construction
- Double-extended crankshaft 3" (7.62 mm) dia., 5.5" (13.97 mm) long
- Keyway (L x W x H) 5" x .75" x .43" (12.7 x 1.9 x 1.09 mm)
- Turbo lubrication
- Flanged suction and discharge on either side
- Stainless steel clamp connections between plungers and push rods
- Removable stuffing boxes with threaded glands
- Cradle cover
- Colmonoy, ceramic, or tungsten carbide plungers
- Disc style aluminum bronze, stainless steel, or monel valves
- Wing-guided stainless steel valves
- Non-adjustable packing standard. Kevlar or double stack packing optional

Note: All installations must contain a pressure relief valve in the discharge line near the pump to help prevent breakage.

OPTIONAL FEATURES

- Mechanical lubricator for stuffing box packing
- Suction stabilizers
- Discharge pulsation dampeners
- Discharge pressure relief valve
- Fabricated steel skid under pump and drive
- V-belt drive assembly
- Totally enclosed metal belt guard (OSHA approved)
- Valve seat puller
- Valve seat driver
- Valve cage wrench
- Companion flanges

	Suction Manifold	Discharge Manifold
QBXA	6" 150# ANSI	3" 600# ANSI
QBXB	4" 150# ANSI	2" 1500# ANSI

Dimensions: Length 43.85", Width 52.36", Height 23.52"

Service	TYPE	CYLINDER	PACKING	STUFFING BOX	COMPONENT	MATERIAL
QBXA	Low Pressure	ASTM B-148-9D Aluminum Bronze	Buna-N Non-Adjustable Type	ASTM B-148-9D Aluminum Bronze	Crankshaft Connecting Rods Crossheads Frame	Cast Nodular Iron Cast Nodular Iron Cast Nodular Iron Cast Iron
QBXB	Medium Pressure	ASTM B-148-9D Aluminum Bronze	Buna-N Non-Adjustable Type	ASTM B-148-9D Aluminum Bronze	Bearing-Main (outer) Bearing-Main (ctr.) Rod Bearings Bushing-Crosshead	Tapered Roller Straight Roller Steel Lined with Tin & Babbit Bronze

*Materials listed are furnished as standard equipment. Alternate materials available upon request.