

DESCRIPTION

The rotary package passer consists of an outer shell of stainless steel sides, UHMW plastic top and base with openings facing the customer and employee. An inner revolving unit built from the same material as exterior plus a clear vision window has an opening to one side only, allowing packages to be passed through a barrier between customer and employee without a breach of security. This package passing option is designed for ease of use, and is a cost effective means of passing small to medium size packages on a frequent basis with little or no maintenance required. For options such as locking mechanisms and integral cash tray surrounding protective barrier, contact factory representative.

FEATURES

- Stainless steel sides
- Delivered assembled, ready for installation
- Levels 1 through 3 ballistic glazing
- Through vision passer
- Exterior or interior units available

CONSTRUCTION

The Rotary Package Passer is constructed from bullet resisting materials with outer shell in a rectangular box shape and openings at two sides. The interior revolving three-sided radius unit to be constructed from the same bullet resisting material plus a clear vision on the fourth side. Unit to revolve back and forth from customer side to secure side, providing package passer function. Unit to have ball bearing mechanism for easy rotation. 3. Tops and bottoms to be UHMW plastic. 4. Hardware will be stainless steel including crank handle.

GLAZING

Glazing materials shall be of a type listed by Underwriter's Laboratories Standard 752 for bullet resistance and/or tested by H.P. White Laboratory for specified bullet resistance. Bullet resisting protection level shall be as specified by end user and consistent with threat level.

BALLISTIC AND FORCED ENTRY RATING

- U.L. Level 1 – 9 mm | 3 Shots | 1 1/4" Uncoated or AR Coated Acrylic
- U.L. Level 2 -- .357 Mag | 3 Shots | 1 3/8" AR Coated Acrylic
- U.L. Level 3 -- .44 Mag | 3 Shots | 1 1/4" LP 1250 Laminated

SIZES

Typical Standard Size: Box OD 18" W x 20" H x 14" D


Custom sizes manufactured based on maximum package dimensions. Consult factory for unit sizing. Please contact our sales/engineering department for current pricing & delivery information.

TOTAL SECURITY SOLUTIONS

P: 517.223.7807 | info@tssbulletproof.com | F. 517.223.0805 | 935 Garden Lane, Fowlerville, MI

Proprietary information not for public distribution

TSS ROTARY PACKAGE PASSER

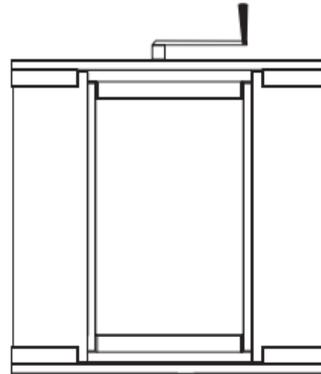

MARKETS SERVED

| Convenience Store | Food Service | Parcel Passer Locations | Other "At Risk" Facilities |

HANDLING INFORMATION

Care should be exercised during shipping and handling to maintain rotary passer appearance. Store upright in a dry, well ventilated building or shelter at a constant temperature. Do not store in damp areas or freshly plastered buildings. Place unit on wood blocks at least 2" high to prevent moisture damage. Remove from protective container just prior to installation. Care should be exercised when installing window to insure that installation is level, plumb, square and secure. The unit must be cleaned during and after the construction period to maintain optimum performance and aesthetic properties. To clean, use a soft, clean cloth and a mild soap, detergent, or slightly acidic cleaning solution (such as vinegar). Wipe with a clean, lint-free cloth.

STANDARD WARRANTY

TSS offers a twelve month limited warranty. This warranty does not cover damage caused by neglect, abuse, vandalism, improper maintenance, accident or any other cause beyond the supplier's control not arising out of defects in material or workmanship. The warranties stated replace and exclude all other warranties. The warranty is limited to replacing products that fail to meet specification, or are defective in quality or workmanship at the time of delivery. TSS will not be responsible for (re)installation expenses or any direct or indirect loss(es) which may result from a defective product. TSS reserves the right to field inspect any product alleged to be defective. The buyer is responsible for any consequences resulting from product use.

TECHNICAL SUPPORT

TSS maintains a full staff of professional and experienced sales representatives, project estimators, engineers, draftsmen, craftsmen and installers ready to assist in all phases of the bullet resistant project from initial design through installation. Consult sales department or your local representative for assistance with all your bullet resistant needs at 1.517.223.7807.