

AK SERIES GENERATOR GANGING

SPECIFICATION SHEET

Amerrec steam generators may be ganged together to supply steam to rooms larger than what a single 14kW unit can accommodate. When ganging generators, only one has a control and temperature sensor connected. Secondary units mimic the primary unit, making the system operation as simple as controlling a single generator.


- Each steamer requires at least one ComfortFlo steam head (we recommend at least 2 heads for 14kW units) and more steam heads per unit may be desirable to reduce steam noise.
- Each steamer will need its own automatic drain valve kit
- Each steamer will need its own drip pan

Note: You may gang an AK steamer only with other AKs.

Required Part

- Item #5304-031 AX Ganging cable.
One required for each secondary steamer.

For further information, refer to Amerrec doc:
4211-1551 AK Installation Instructions

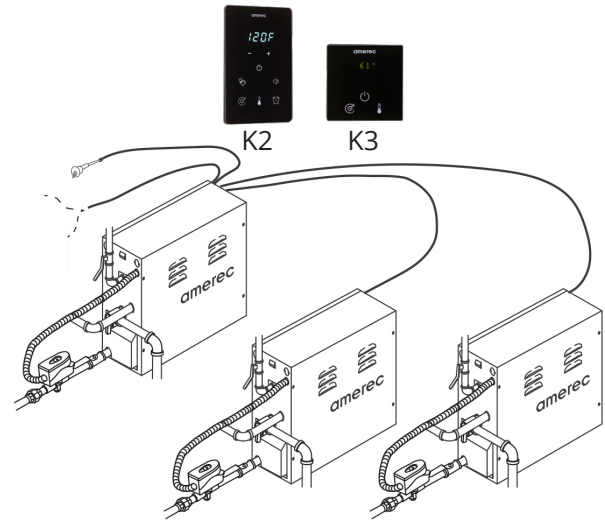

Ganged System Ratings

System kW		Max cu ft	Max cu m	Steamer Models Used			
kW				Qty	Model	Qty	Model
AK/AX 18	18	700	19.8	2	AK/AX 9		
AK/AX 22	22	900	25.5	2	AK/AX 11		
AK/AX 28	28	1100	31.2	2	AK/AX 14		
AK/AX 30	31	1300	36.8	1	AK/AX 9	2	AK/AX 11
AK/AX 36	36	1500	42.5	2	AK/AX 11	1	AK/AX 14
AK/AX 42	42	1800	51.0	3	AK/AX 14		

AMEREC
575 Cokato Street E. | Cokato, MN 55321
Toll-Free 1-800-331-0349
amerrec@amerrec.com | www.amerrec.com

Amerrec reserves the right to change specifications and design without notice.
© 2022 Amerrec Steam

07/22

amerrec[®]
STEAM. SAUNA. SOLUTIONS.