


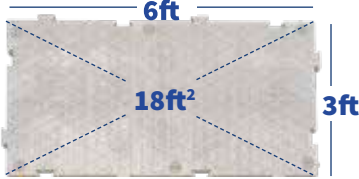


PRODUCT SPECIFICATIONS

RAMP SPECIFICATIONS

<p>MODULE IMAGE</p>		
<p>MODULE SIZE</p>	<p>ACTUAL 6' L x 3' W x 1.5" H 1.8 m x 0.9 m x 3.8 cm</p> <p>USABLE AREA 18 ft² 1.67 m²</p>	<p>HEIGHT 1.5 in (3.81 cm)</p> <p>WIDTH 35.99 in (91.41 cm)</p> <p>LENGTH 16.03 in (40.72 cm)</p>
<p>WEIGHT</p>	<p>36 lbs (16.3 kg)</p>	<p>9 lbs (4.08 kg)</p>
<p>WEIGHT CAPACITY</p>	<p>200 psi, depending on subsurface conditions</p>	<p>200 psi, depending on subsurface conditions</p>
<p>COLOR</p>	<p>Translucent, anthracite gray</p>	<p>Translucent, anthracite gray</p>
<p>MATERIAL</p>	<p>High-Density Polyethylene (HDPE) with UV resistance properties and polycarbonate cam locks</p>	<p>High-Density Polyethylene (HDPE) with UV resistance properties and polycarbonate cam locks</p>
<p>FLAMMABILITY RESISTANCE</p>	<p>UL94HB</p>	<p>UL94HB</p>
<p>AERATION / DRAINAGE / LIGHT PENETRATION</p>	<p>1.88 in² / ft²</p>	
<p>DESIGN FEATURE</p>	<p>Aeration holes on panel surface and open bottom for drainage and light penetration Internal honeycomb structure for strength</p>	<p>Meets ADA Compliance requirements (U.S.)</p>
<p>CONNECTION SYSTEM</p>	<p>Interlocking flange panel connection design Built-in cam locks secure adjoining panels with twist of T-bar tool ADA compliant ramps attach along any connection point</p>	<p>Interlocking flange connection design with built-in cam lock Built-in cam lock secures to adjoining panel with twist of T-bar tool</p>
<p>SHIPPING INFO</p>	<p>U.S. standard 48 ft flatbed truck: 810 panels 40 ft ISO shipping container: 708 panels 20 ft ISO shipping container: 306 panels U.K. lorry/EU trucks: 806 panels</p>	

3AODLD 200630 ©2020 Signature Systems