

M-24V90-TRX

PROTRXion™ Series | Data Sheet

inVENTUS
POWER



Automotive Grade Cells
from top tier manufacturers



Fast charging
within 2 hours



Long shelf life performance
with shutdown mode



Cold temperature functionality
(-35°C) with optional integrated heater



BMS certified to functional safety standard UL/IEC 60730-1



Designed & Engineered in the **USA**

- **Supports regenerative braking**
- **Soft Start Control** (System Pre-charge)
- **Patented Virtual BMS** with Advanced Module Balancing Technology
- **Universal Communication Protocol** (CANopen/J1939)
- **UL2580** Shock & Vibration + Thermal Propagation Mitigation
- **Compatible with many off-the-shelf chargers**


Electrical Specifications

Cell Chemistry	LiFePO4
Pack Voltage (Nom/Max)	25.6V / 28V
Pack Energy	2.3kW (90A)
Specific Energy	115Wh/kg
Continuous Power	3.8kW (150A)
Recommended Charge CCCV	45A / 28V
Peak Power (<10sec)	5.12kW (200A)
Cycle Life (@ 25°C)	4,000 @ 80% DoD
Scalability	Up to 15 packs in parallel

Operational Specifications

Charge Temp	0°C to 55°C -35°C to 55°C (w/ heater)
Discharge Temp	-20°C to 55°C -35°C to 55°C (w/ heater)
Storage Temp	-20°C to 60°C
Humidity (Operating)	5% to 95%
Humidity (Storage)	<70%

Mechanical Specifications

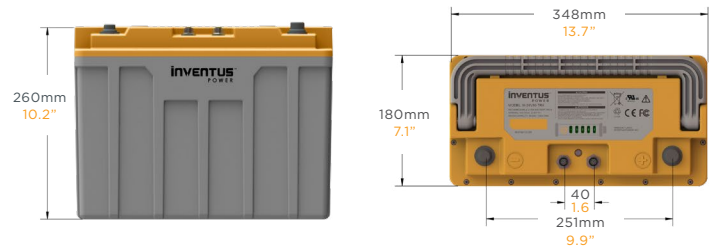

BCI Size	Group 5D
Terminal Type (ISO)	M8 (Neg), M10 (Pos)
Terminal Torque (Nm)	17 ± 1 (Neg), 22 ± 1 (Pos)
Weight	20.3kg (44.7lbs)
Installation Orientation	Horizontal / Vertical
Ingress Protection Rating	IP65 (IP67 when mated)
Case Flammability Rating	Flame Retardant UL94 V-0

Certifications

- UL1642 (Cell)
- UL2580 (Pack)
- IEC62133 (Cell/Pack)
- IEC62619
- FCC Class B
- CE
- UN38.3

NOTE: Please contact info@inventuspower.com to obtain the PROTRXion™ User Guide for proper installation and handling.

Market Applications



Professional Cleaning



Light Electric Vehicle



Aerial Work Platform



Material Handling



Robotics




Renewables & Energy Storage

M-24V90-TRX

PROTRXion™ Series | Data Sheet


Capacity vs. Discharge Rate

Test condition: Ambient Temperature

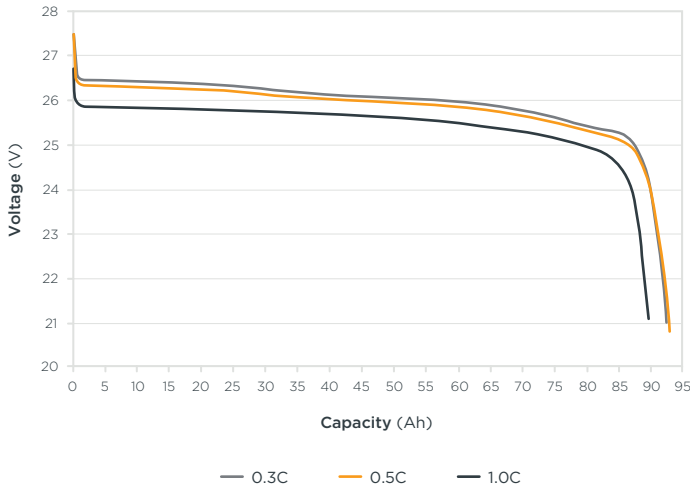


Cycle Life @ 80% DoD

Charge 1C, discharge 1C at 25°C

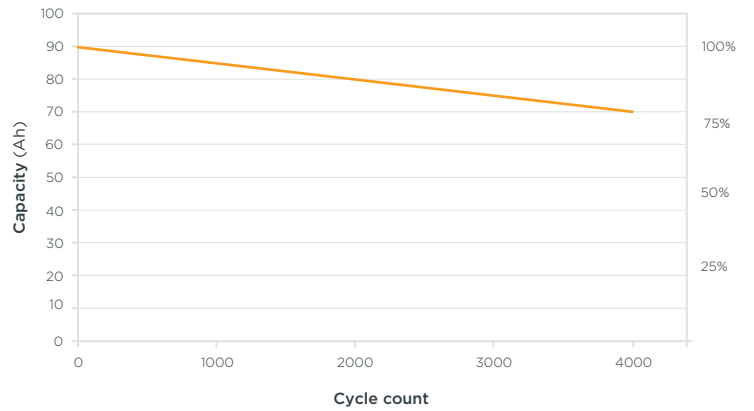


Voltage and Capacity vs. Temperature

Discharge current: 1.0C

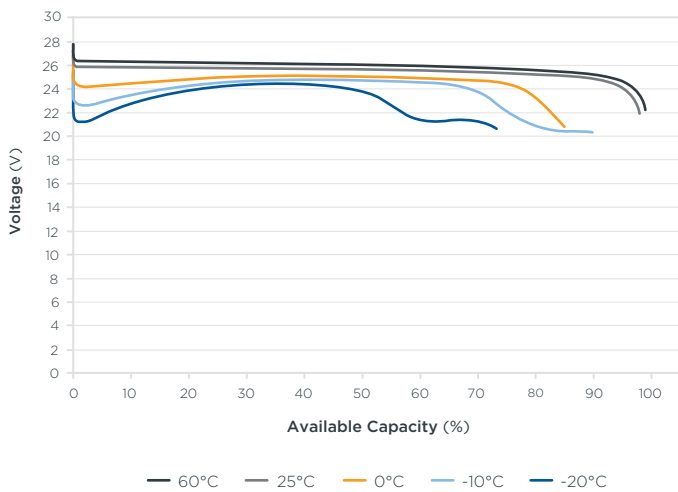

Charging Performance

Test condition: Ambient Temperature

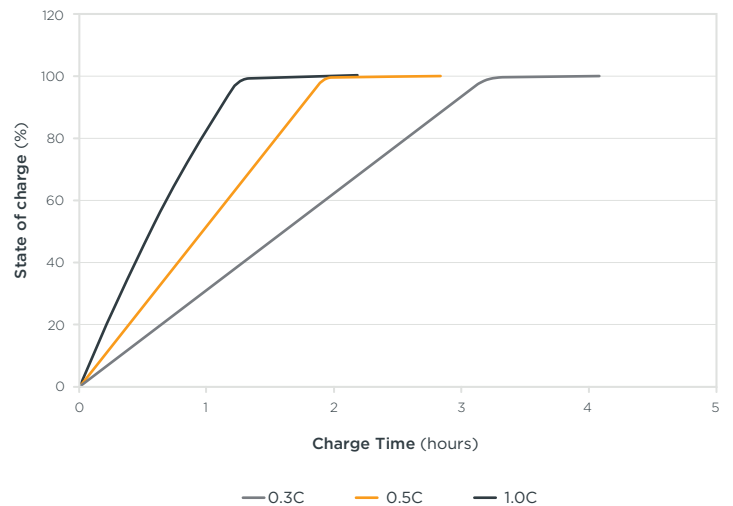

Inventus Power reserves the right to make adjustments to this document at any time, without notice or obligation. All data in this publication is for reference use only. Models may vary from shown.



Request
more Information

inventuspower.com | info@inventuspower.com | +1 877.423.4242