

# General Catalogue

---

GENERAL CATALOGUE 2021 \ 2022

---

LIGHTING  
SOLUTIONS,  
CONTROL  
SYSTEMS AND  
POWER SUPPLIES



# Index.

NAME	PAGE
AREA LIGHT	157
BALI	37
BINARIO UNO	195
BLUES	149
BLUESMART	264
BOARD	223
CANALINA PASSACAVI	276
CORNER MULTISOCKET	277
FLEXSPOT	153
FLY LIGHT	85
FREEDOM PLUS	93
GHIBLI KS	33
HAWAII	137
IKO \ KEA	43
INSIDER	28
INSIDER PIR	27
IR DC/DC	271
IR DOOR TUBE	270
K CONCEPT	217
KALEO	69
KENDO	63
KENDO IRS	64
KENDO.IN	65
KENDO.IN IRS	66
KINETIC	266
KIT SENSOR	273
KITON	81
KORAL 1	230
KORAL 2	231
KRISTAL	241
KUBI	39
KUBI IRS	40
KURSAAL 1	232
KURSAAL 2	233
KURSAAL 3	234
LEGIS	155
LIGHT POINT	151
LUCKY 1	139
LUCKY 2	141
LUCKY 3	143
LUCKY 4	145
LUCKY 5	147
LUGANO IP44	35
LUMI	51

NAME	PAGE
MALINDI2	71
MALINDI2 IRS	72
MEC 1	106
MEC 2	107
MEC 3	108
MEC 4	109
MEC 5	110
MEC DISTRIBUTOR	262
MEC DRAWER	111
MEC DRIVER	262
MEC RACK	55
MEC RACK	117
MICRO MEC 1	112
MICRO MEC 1 PLASTIC	113
MICRO MEC 2	114
MICRO MEC 3	115
MICRO MEC 3 PLASTIC	116
MICROLINE	89
MINI CORNER	47
MINI KENDO	59
MINI KENDO BLACK	61
MINI KENDO.IN	60
MINI NOOR 24 V	57
MINI OCTOPUS	253
MINI TUBULAR	91
MISKA	79
MOBILE APP	264
MOONLIGHT QT	134
MOONLIGHT TT	133
NUBE 230	126
NUBE 35	123
NUBE 58	124
NUBE 58 IP44	125
NUBE 68	127
NUBIO	95
OSAKA	25
OSLO2	75
PAPER SHELF	225
PARIS	77
PLINTHY	159
PROLUNGA	276
R TOUCH	272
RADIO SWITCH	273
SCHEIN 1	236

NAME	PAGE
SCHEIN 2	237
SIGN	209
SIRENUSE	83
SKUBA	49
SLIDING	194
SLIMFIT	275
SMART 1	263
SMART 1	268
SMART 4	263
SMART 4	268
SMART GATEWAY	269
SMART GHOST	268
SMART MINI	161
SMART MUSIC	267
SMART PIR	161
SMART SENSOR	269
SMART SENSOR 0	269
SMART SWITCH	269
SMART TOUCH	268
SMARTY HCL	265
SMARTY VOICE	265
SOLARIS BACK	169
SOLARIS DOUBLE SIDE	168
SOLARIS L5	168
SOLARIS L7	169
SOLARIS LUMI	170
SOLARIS SNAP-IN	170
SOLARIS UC PLUS	31
STARLIGHT	53
STRIP REEL 10 MM	118 - 246
STRIP REEL 5 MM	119 - 247
STRIP REEL COB	248
STRIP REEL EMOTION	249
STRIP REEL RGB	250
STRIP REEL RGBW	251
SUNRISE 58	129
SUNRISE 68	130
TOKI	277
TOUCH DIM CONTROL	272
VISTA	239
VIVARA	87
WIRED	266



## Linear. 22

OSAKA 25	MINI CORNER 47	KALEO 69	VIVARA 87
INSIDER 27	SKUBA 49	MALINDI2 71	MICROLINE 89
SOLARIS UC PLUS 31	LUMI 51	OSLO2 75	MINI TUBULAR 91
GHIBLI KS 33	STARLIGHT 53	PARIS 77	FREEDOM PLUS 93
LUGANO IP44 35	MEC RACK 55	MISKA 79	NUBIO 95
BALI 37	MINI NOOR 57	KITON 81	INFINITO 97
KUBI 39	MINI KENDO 59	SIRENUSE 83	
IKO \ KEA 43	KENDO 63	FLY LIGHT 85	

## Mec System. 102

MEC 1 106	MEC 4 109	MICRO MEC 1 112	MEC RACK 117
MEC 2 107	MEC 5 110	MICRO MEC 2 114	LED STRIP 10 MM 118
MEC 3 108	MEC DRAWER 111	MICRO MEC 3 115	LED STRIP 10 MM 119

## Spot. 120

NUBE 122	LUCKY 1 138	LUCKY 5 146	LEGIS 154
SUNRISE 128	LUCKY 2 140	BLUES 148	AREA LIGHT 156
MOONLIGHT 132	LUCKY 3 142	LIGHT POINT 150	PLINTHY 158
HAWAII 136	LUCKY 4 144	FLEXSPOT 152	SMART PIR 160

## Light panels. 162

SOLARIS L5 168	SOLARIS L7 169	SOLARIS LUMI 170	SOLARIS GLAM 174
SOLARIS DOUBLE 168	SOLARIS BACK 169	SOLARIS SNAP-IN 170	

## Modular systems. 176

POWERLINE 178	BINARIO UNO 192	K CONCEPT 216	PAPER SHELF 224
SLIDING 192	SIGN 196	BOARD 222	

## Mirrors. 226

KORAL 1 230	KURSAAL 2 233	SCHEIN 2 237	IRIS \ \LILIUM 242
KORAL 2 231	KURSAAL 3 234	VISTA 238	
KURSAAL 1 232	SCHEIN 1 236	KRISTAL 240	

## LED Strips. 244


STRIP REEL 10 MM 246	STRIP REEL COB 248	STRIP REEL RGB 250	MINI OCTOPUS 252
STRIP REEL 5 MM 247	STRIP REEL EMOTION 249	STRIP REEL RGBW 251	

## Power supplies and control systems. 254

MEC DRIVER 262	IR DOOR TUBE 270	KIT SENSOR 273	PROLUNGA 276
DISTRIBUTOR 262	IR DC/DC 271	RADIO SWITCH 273	CORNER MULTISOCKET 277
MODULES 263	R-TOUCH 272	SLIMFIT 274	TOKI 279
SMART CONTROLLER 268	TOUCH DIM CONTROL 272	CANALINA PASSACAVI 276	



# Guide.

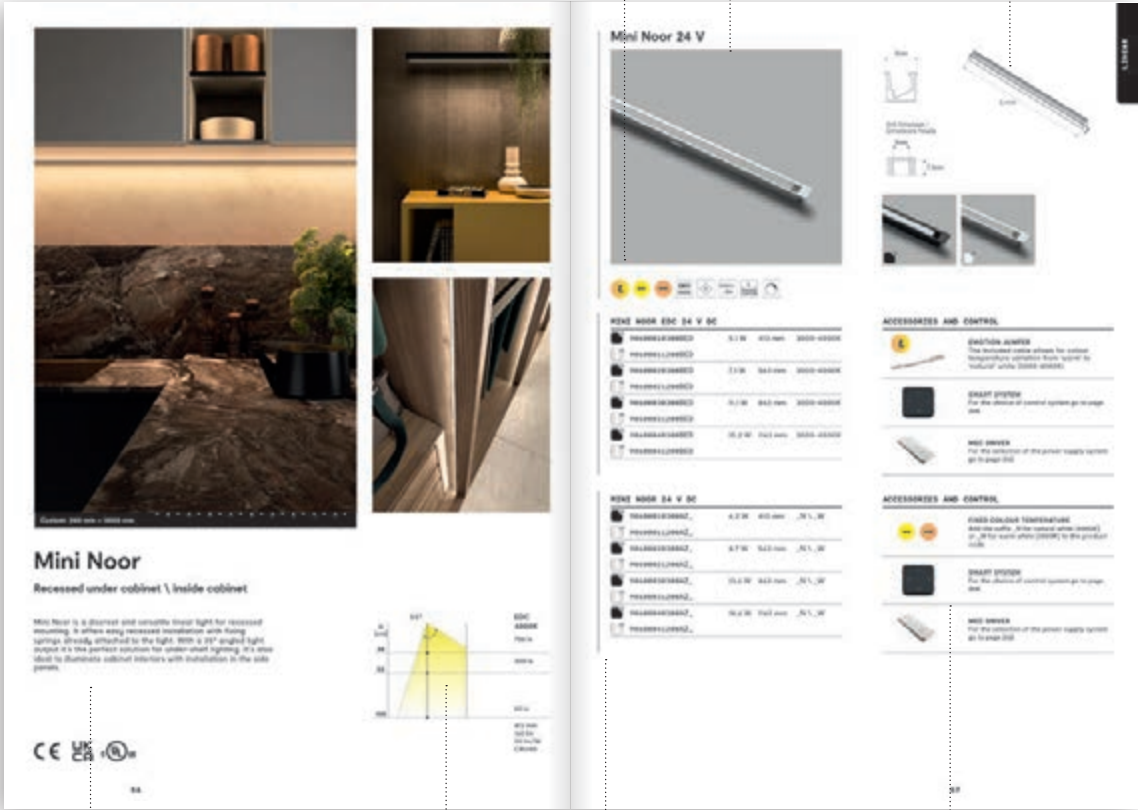

Product picture

Technical drawing

Name and description

Illuminance







Suggested accessories






## Source

-  Warm white  
(~ 3000K)
-  Natural white  
(~ 4000K)
-  Cold white  
(~ 6500K)
-  Emotion Dual Color  
(3000÷4000K) EDC
-  Dual Blue  
(3000K \ 465 nm)
-  Dual UV-A  
(3000K \ 405 nm)










## Power supply

-  12 V DC  
constant voltage
-  24 V DC  
constant voltage
-  350mA  
constant current
-  220-240V~  
input
-  100-240V~  
input
-  USB








## Insulation class

-  Class I
-  Class II
-  Class III








## Symbols

-  Suitable for installation  
on furniture
-  Cable length  
~2,5m
-  Visible light dots
-  Even light
-  Dimmable
-  IP20  
IP protection index
-  Magnetic connection
-  Cuttable
-  Daisy chain















## Accessories

-  Infrared switch
-  Infrared switch for doors
-  PIR sensor for doors
-  Wireless connection
-  Bluetooth
-  Audio
-  Anti fog


## Certifications

-  European Norms  
Electrical Cert.
-  cULus
-  EurAsian  
Conformity
-  China Compulsory  
Certificate
-  RCM Certification
-  Korea Certification
-  UK Conformity  
Assessed

## Finishes

- |   |  |  |  |
|---|--|--|--|
|  <sup>00</sup> Transparent |  <sup>09</sup> Chrome             |  <sup>22</sup> White RAL 9010     |  <sup>85</sup> Nickel        |
|  <sup>01</sup> White       |  <sup>10</sup> Grey               |  <sup>65</sup> Metallic grey      |  <sup>91</sup> Brushed steel |
|  <sup>03</sup> Black       |  <sup>12</sup> Anodised aluminium |  <sup>80</sup> Steel grey         |  |
|  <sup>08</sup> Gold        |  <sup>21</sup> Gunmetal grey      |  <sup>82</sup> Polished aluminium |  |



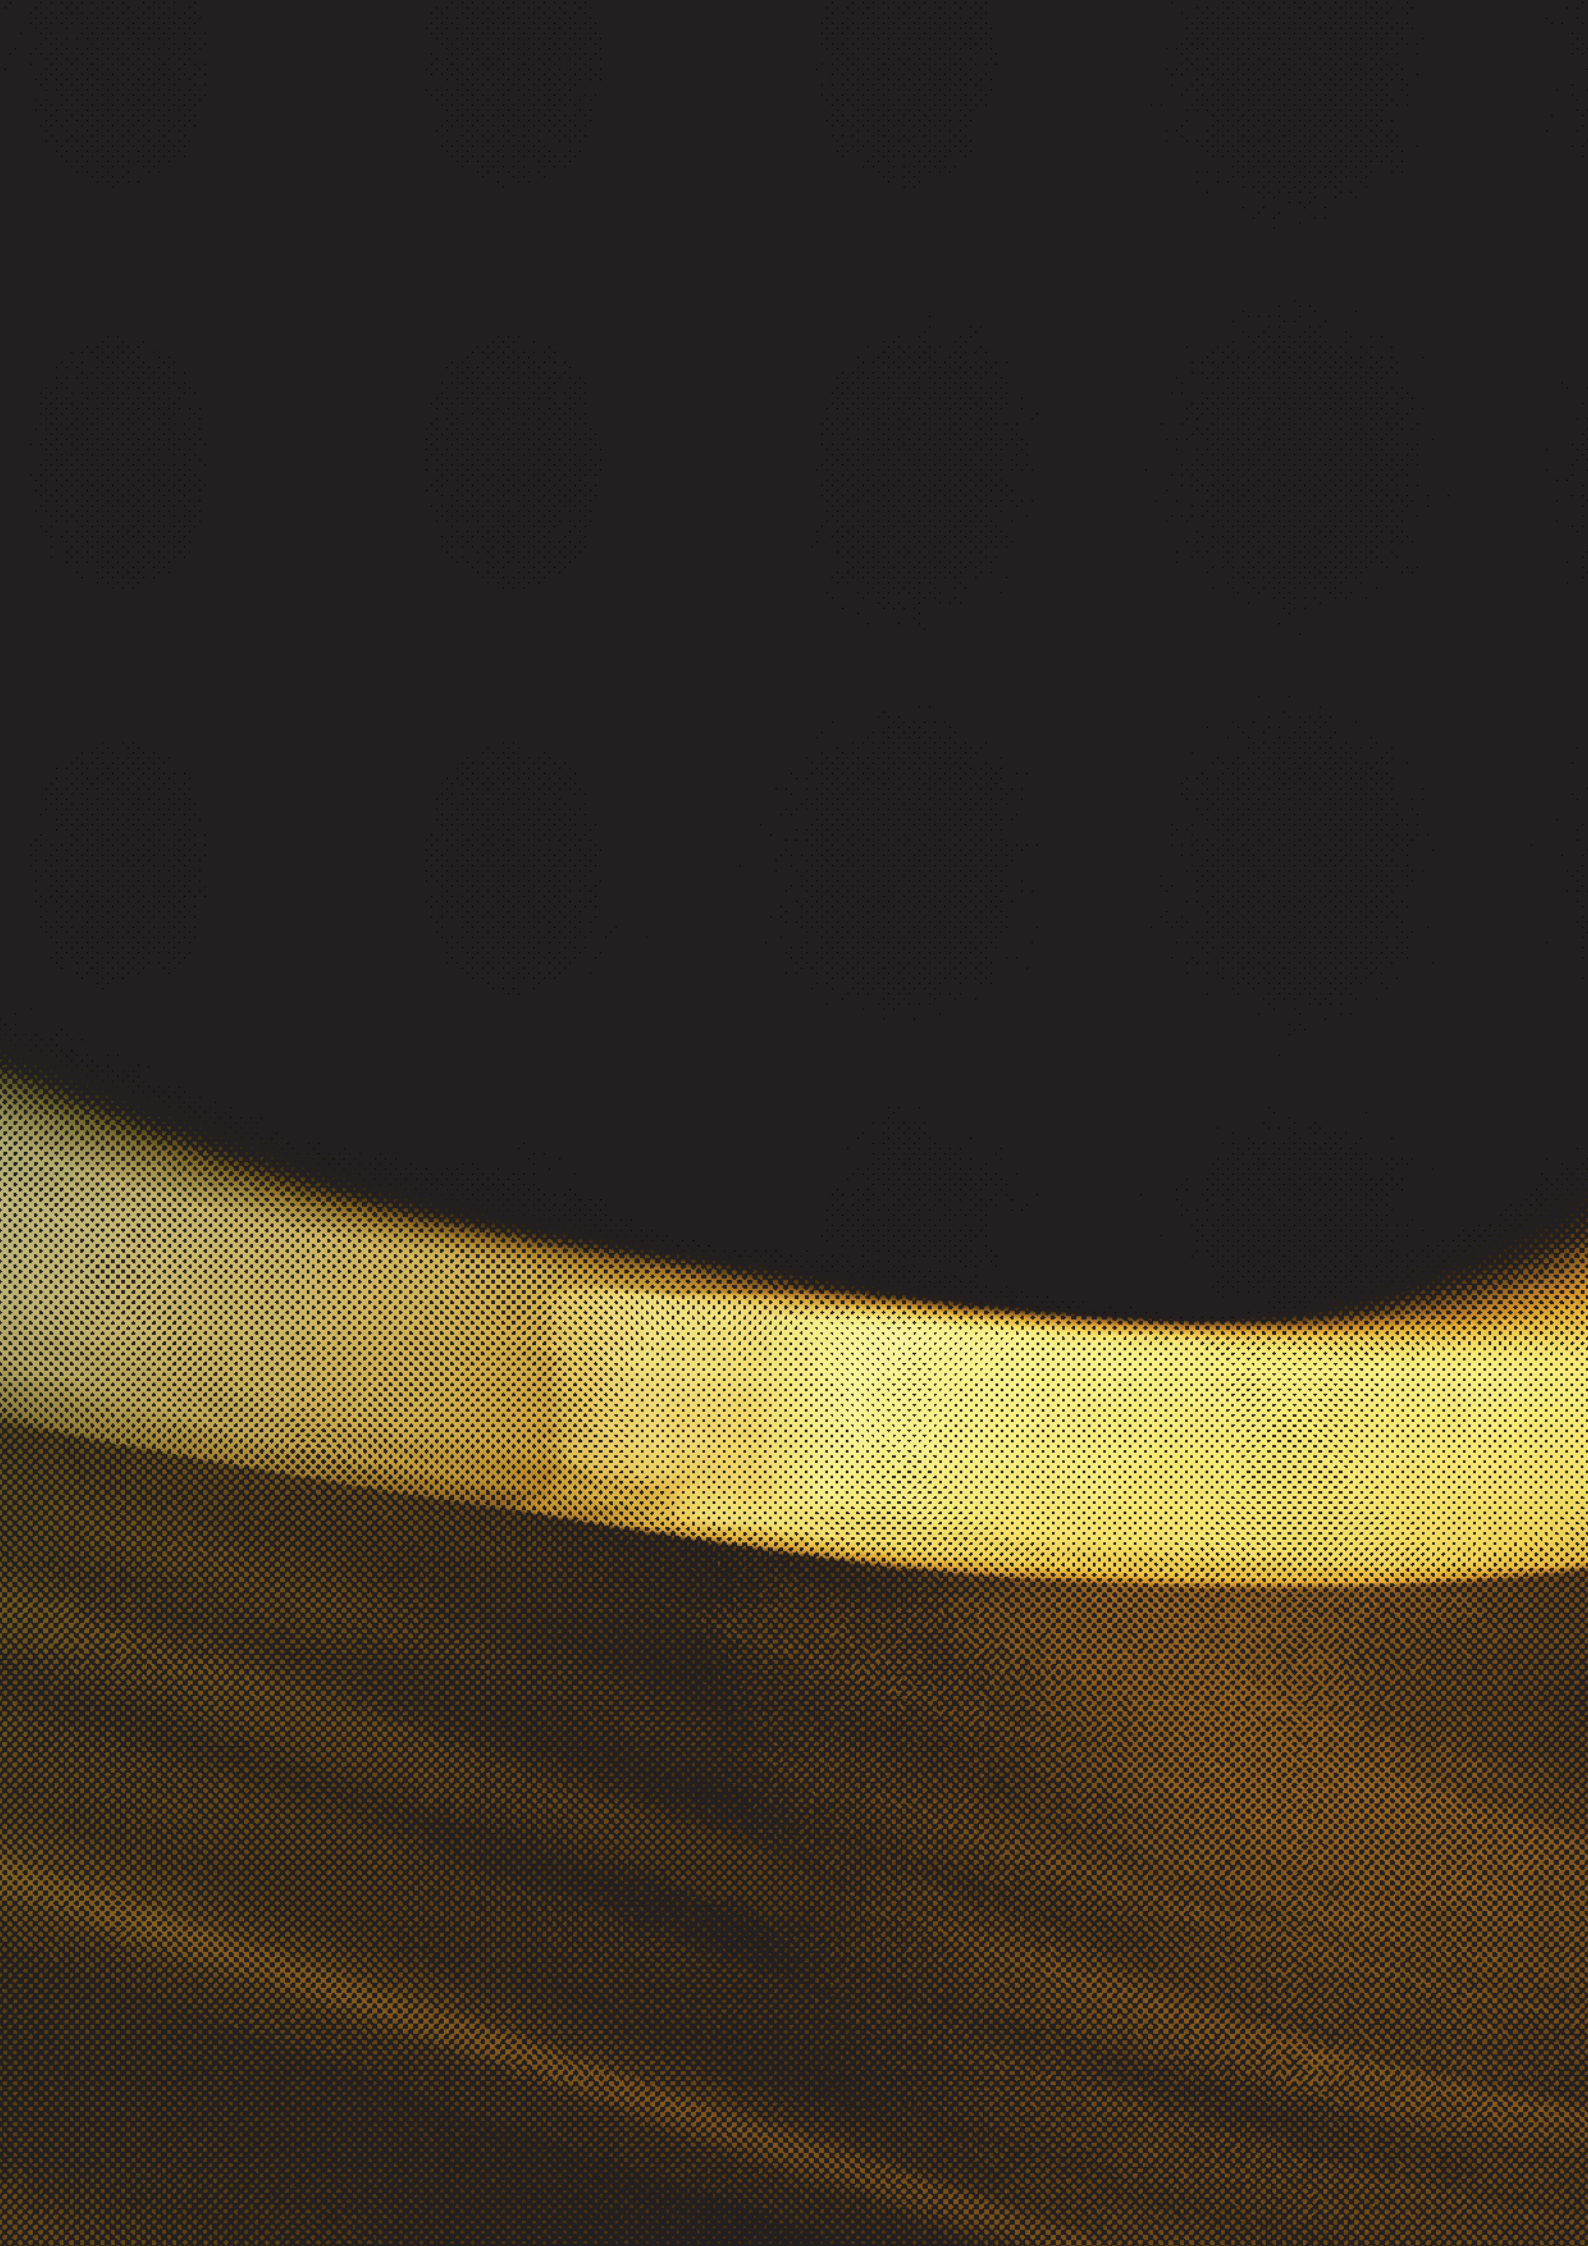



# General Catalogue

---

GENERAL CATALOGUE 2021 \ 2022

---

LIGHTING  
SOLUTIONS,  
CONTROL  
SYSTEMS AND  
POWER SUPPLIES







# Beauty, elegance and functionality, protagonists through light.

---

WE USE LIGHT  
TO ENHANCE THE  
PERSONAL EXPERIENCE  
OF THE WORLD.

We support you in making your projects shine with dedicated solutions, perfecting the quality and effect of light on objects to enhance the visual and emotional experience.

Light. A seemingly simple element, which, in reality, requires specific skills to achieve the desired effect and spatiality. We strive for the best possible colour rendering, energy efficiency and durability, whilst, at the same time, researching aesthetics to create harmonious lighting solutions within spaces.

We interpret and pander to interior design trends, to help improve life in the kitchen, living and sleeping areas: the new hybrid spaces for sharing, studying and working.

Functionality and elegance at the service of people's well-being and quality of life.



# A professional partner.

---

**OUR APPROACH:**

- ATTENTION TO DESIGN
- TECHNOLOGICAL AND APPLICATION INNOVATION
- DURABLE PRODUCTS
- ATTENTION TO DETAIL
- PRECISION

## Customised solutions.

**FOR FURNITURE AND INTERIOR DESIGN PROJECTS**

We offer our expertise to meet the demands of various markets. We offer a consultancy service to support you, with maximum flexibility and availability of production departments and logistics on an international scale to reduce delivery times.

## Prototyping.

**FOR TAILOR-MADE PROJECTS**

We are in constant contact with your customers' technical, quality and procurement departments in order to design, together, the tailor-made solution to improve the end-user experience.

## Innovation and research.

**TECHNOLOGY AT THE SERVICE OF FUNCTIONALITY**

The Technical Department and Research & Development ensure a constant capacity for innovation in lighting technology and develop customised designs and prototypes. The aesthetics of the products are taken care of by experienced designers:

- Product development
- Rendering
- Prototyping
- 3D printing







L&S


LIGHTING INTELLIGENCE



RESIDENTIAL



RETAIL

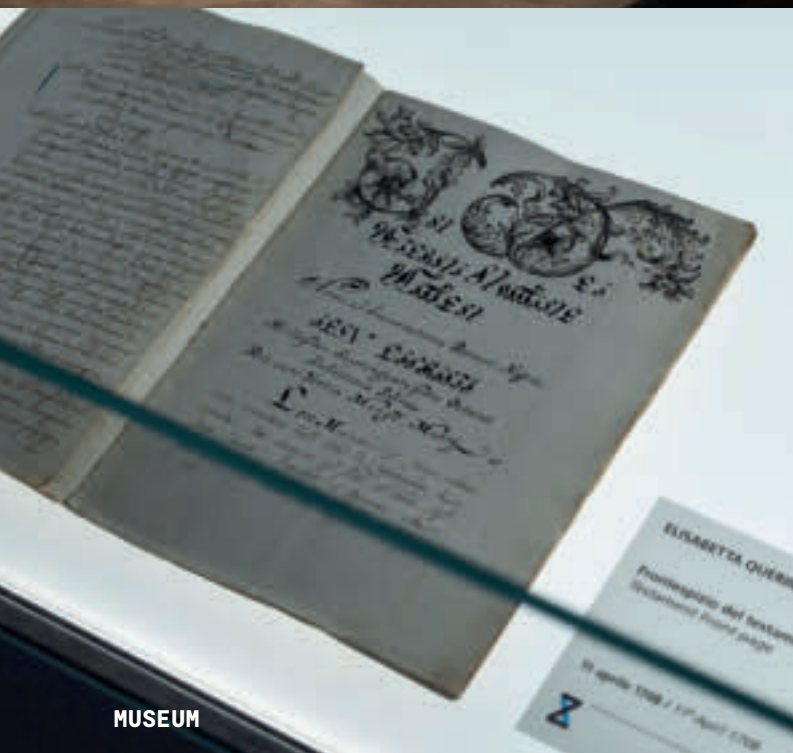

MUSEUM



INDUSTRIAL



06

NAVAL



DISTRIBUTION



# Versatile solutions for various application areas.

---

## Residential

Solutions dedicated to domestic environments, from the kitchen to the living area, from the sleeping area to the bathroom. Light is discreetly integrated into the furnishing elements, illuminated mirrors and modular structures contribute to elegant and functional furnishing. Optical research ensures perfect illumination of the work surface.

## Retail

Complete range for retail spaces, with solutions that enhance the products on display and accompany the customer in the shopping experience. The light integrated into the shelving is coordinated with the ambient light of spotlights and downlights, becoming a means of communication with the light panels.

## Museum

Dedicated solutions for museums and galleries, designed for the art world. The light is integrated into the installation, offering the visitor a unique experience and enhancing the works with a perfectly homogeneous light that brings out their chromatic aspects, whilst complying with the strictest parameters of conservation of the works.

## Industrial

Customised integrated lighting for projects by manufacturers of lifts, escalators, chillers, extractor hoods, blinds and pergolas.

## Hospitality

Lighting systems for the hotel industry and for the interiors of cruise ships and shipping vessels, promoting the well-being and comfort of guests.

## Distribution

A complete service and catalogue dedicated to distributors who are looking for ease of installation, certified safety, fast delivery and sales support.





L&S DEUTSCHLAND GMBH  
→ RÖDINGHAUSEN, GERMANY  
SINCE 2002

L&S ITALIA S.P.A.  
→ BRUGNERA, ITALY  
SINCE 1977

L&S LIGHTING CORPORATION  
→ ATLANTA, USA  
SINCE 2011

4

PRODUCTION SITES AND  
COMMERCIAL SITES

40+

YEARS OF EXPERIENCE

3

SPECIALIST R&D DEPARTMENTS

50+

COUNTRIES SERVED

400+

CONTRIBUTORS

100+

NEW PRODUCTS/YEAR

1,800

M<sup>2</sup> OF SHOWROOM

30,000

M<sup>2</sup> OF PRODUCTION AREA



# One international Group, serving the global market.

●  
L&S LIGHTING EQUIPMENT  
→ SHANGHAI, CHINA  
SINCE 2006

We were founded in Italy in 1977 to meet the needs of the furniture industry and soon became a leading international player.

Thanks to the high quality of our production activities and constant investment in technological research, we have progressively expanded our presence in foreign markets. We have had sales offices, R&D departments and production facilities in Germany since 2002, in China since 2006 and in the

USA since 2011. Today, the Group employs over 400 people and operates in more than 50 countries.

The Italian plant covers a total area of 24,500 square metres and houses the management offices, production, logistics and sales facilities, as well as the Research & Development division.

The German office with its commercial action and focus on technology contributes

to the company's expansion into the European market.

The USA, with its specialist knowledge and China, with its specialisation in electronics and mechanics, develop their own target markets and are a logistics hub for international customers.



# We design for the world: certifications for all markets.

---

Thanks to the experience and expertise we have gained over the years, we consistently provide our client companies with certified products that are immediately ready to be sold in the main countries worldwide: this multiplies business opportunities and facilitates international distribution.

Recent investments in in-house certification laboratories make it increasingly faster to obtain the required requisites and


markings, to support our partners' exports in real time, even when regulations are updated.

L&S products are designed to meet the main requirements of the various regulatory standards with the greatest of ease, thus anticipating future needs.


## Test Lab for certifications.

The in-house laboratory tests each product, ensuring its safety and reliability. All the documentation needed to obtain each type of certification is provided, in accordance with specific international standards.



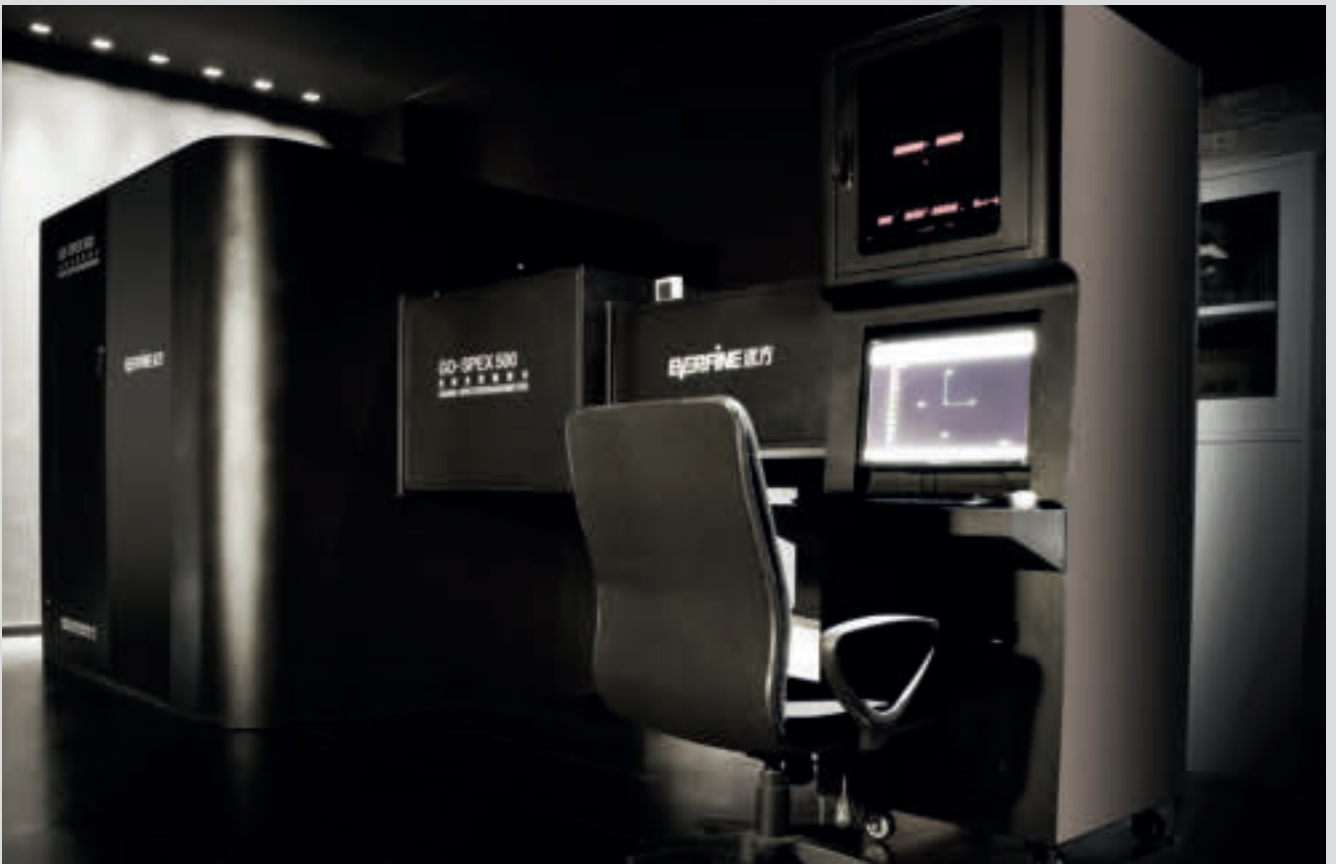

Gonio-spectroradiometer

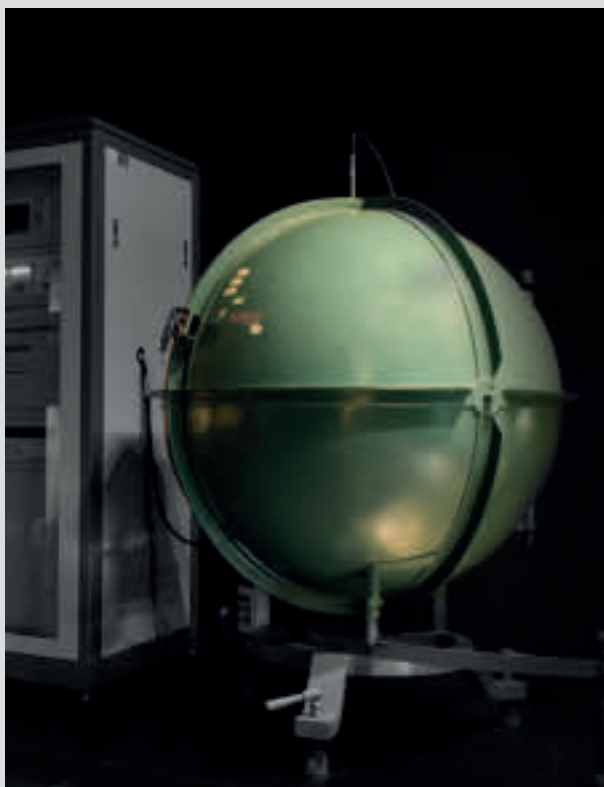

Integrating sphere





# Industrial and global logistics platform

FOR AN EXCELLENT SERVICE

## Design and prototyping

OF A CUSTOMISED SOLUTION

## Project consultancy

FOR AN EFFECTIVE LIGHTING  
AND AESTHETIC RESULT

## International standards

OF CERTIFICATION

## Ongoing training

FOCUS ON THE UPDATING AND  
DRAFTING OF COMMUNICATION  
MATERIAL FOR SALES SUPPORT



# One solution provider.

---

We design and supply all the elements needed to illuminate a room properly, to make an exhibited product stand out.

We offer a comprehensive programme, a lighting system that integrates into the furniture elements and combines with the architectural lighting, improving our perception of the environments we live in. We are a one-stop shop for all your interior lighting needs.

## A tailor-made service.

We listen to and analyse the needs of each customer, offering a tailor-made service with the aim of finding the best solution for each individual project.

We compete with the best players in the industry, as members of the ASSIL, the Italian national association of lighting manufacturers.


We believe in open innovation and develop synergies with established architecture and design firms.

We support the educational and research fabric, collaborating with ISIA Roma Design, a university institute for industrial design training.



## EDC


LAMP WITH  
IR SENSOR SWITCH



With a simple hand gesture in front of the sensor, the lamp can be switched on and off. The colour temperature changes by holding your hand close to the sensor for 5 seconds.

## EDC


LAMP WITHOUT  
IR SENSOR SWITCH



The colour temperature changes to warm light or daylight thanks to the Emotion Jumper.

## Emotion/EDC

LAMP WITH  
EXTERNAL CONTROLLER



Thanks to L&S's remote controls, the lights can be switched on and off, dimmed and their temperature colour can be gradually changed.



L&S TECHNOLOGIES

---

# EDC technology: Emotion Dual Colour.

---

CHANGING COLOUR  
HAS NEVER BEEN  
SO EASY.

EDC lamps equipped with an IR, Infrared sensor switch enable you to set the colour temperature to 3000K or 4000K in just 5 seconds, simply by putting your hand near the switch.

Versions without an on-board controller are supplied with an "Emotion Jumper", a converter cable that allows the colour temperature to be inverted without the need for two different luminaires.

Emotion is the innovative system developed by L&S to manage, within a single luminaire, the gradual change of colour temperature from warm (2700K) to cold (6500K) with a simple gesture.

## A system that is easy to integrate.

Emotion Dual Colour can be integrated into most products. Emotion and EDC are also compatible with the various L&S control systems, which allow for gradual colour temperature changes.



Light has a decisive influence on people's well-being. Scientific research has shown that its effects operate on several levels: visual, cognitive, emotional and biological.

Hence the importance of being able to regulate the lighting of indoor spaces, where we spend on average 90% of our time. L&S's Human Centric Lighting (HCL) system provides a simple and innovative answer to this need.

## HCL technology.

This is a method of managing light sources that adapts the emission of light (both in quantity and in colour temperature) according to circadian cycles. The light changes according to the time of day to match human being's biological rhythms, thus ensuring better visual comfort, concentration, relaxation, regularity of the internal body clock that regulates the alternation of wake/sleep.

The circadian rhythm, from the Latin "circa diem", literally "around the day", is a 24-hour period that regulates the lives of living beings.

Light plays a key role in regulating our biological clock: it influences the secretion of testosterone and melatonin and, thus, the alternation of sleep and wakefulness.



## HCL functions. Practicality and ease of use.

### ON/OFF PROGRAMME

It switches on multiple light points, dims the light and varies the temperature to make it as close as possible to natural light.

### LIGHT SCENARIOS

This enables lighting scenarios to be set to suit personal habits and, above all, the activities carried out throughout the day, from work to leisure.

### REMOTE MANAGEMENT

Using the dedicated Mec Driver module, the parameters can be managed directly from a smartphone or tablet with the greatest of ease.



L&S TECHNOLOGIES

---

# Human Centric Light: the ideal light every hour.

---

PROGRAMME THE IDEAL LIGHT  
AT ANY TIME OF DAY  
AND FOR ANY ACTIVITY.





**Visual comfort in  
complete safety.**

A selection of dedicated  
sensors and controllers enable  
"Blue Light" and UV-A to be  
switched on and timed.



L&S TECHNOLOGIES

# Blue light, UV-A and UV-C.

LIGHT MANAGEMENT  
IS ALSO A SOLUTION  
AGAINST BACTERIA  
AND VIRUSES.

We have put the topic of room sanitation at the centre of our investments and extended the "Lighting Intelligence" programme: a selection of linear lamps

equipped with specific LED modules are available, which, in a single solution, enable the alternation between white light and a bactericidal function.



## Blue Light

A wavelength of 465 nm in the visible spectrum which, with a minimum exposure of two hours, helps to reduce the presence of bacteria and unpleasant odours on fabrics and surfaces.



## UV-A

A more advanced solution which, thanks to the action of ultraviolet rays, allows for a considerable reduction of microbes in about half an hour.



## UV-C

Customised solutions with LEDs UV-C for maximum antimicrobial effectiveness in professional and home environments.



# Solutions.

---



**LINEAR 22**

---

**MEC SYSTEM 102**

---

**SPOT 120**

---

**LIGHT PANELS 162**

---

**MODULAR SYSTEMS 176**

---

**MIRRORS 226**

---

**LED STRIPS 244**

---

**POWER SUPPLIES AND CONTROL SYSTEMS 254**



# Linear.

---





SURFACE  
MOUNTED  
LINEAR  
LAMPS

NEW

25  
OSAKA27  
INSIDER31  
SOLARIS UC  
PLUS


NEW

33  
GHIBLI KS35  
LUGANO  
IP4437  
BALI39  
KUBI43  
IKO \ KEA47  
MINI  
CORNER49  
SKUBA51  
LUMI53  
STARLIGHT55  
MEC RACKRECESSED  
LINEAR  
LAMPS57  
MINI NOOR59  
MINI KENDO63  
KENDO69  
KALEO71  
MALINDI275  
OSLO277  
PARIS79  
MISKASPECIAL  
LINEAR  
LAMPS81  
KITON


NEW

83  
SIRENUSE85  
FLY LIGHT

NEW

87  
VIVARA89  
MICROLINE


NEW

91  
MINI  
TUBULAR93  
FREEDOM  
PLUS95  
NUBIO

NEW

97  
INFINITO



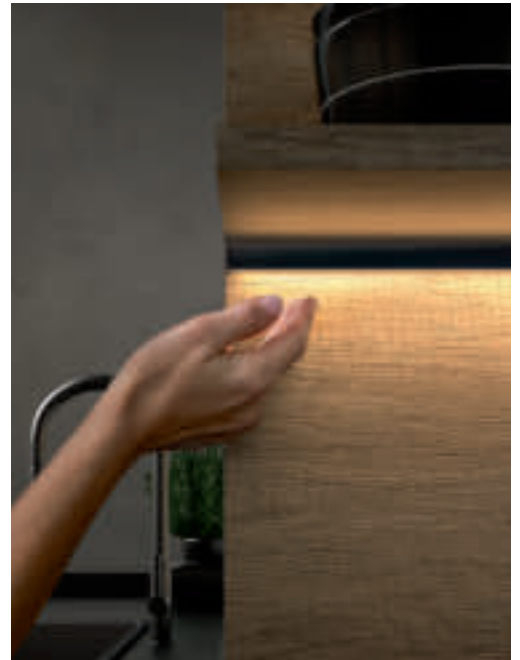


Custom: 200 mm ~ 3000 mm

# Osaka

## Under cabinet




Osaka is a linear aluminium profile characterized by a backward source that guarantees optimal visual comfort and a defined beam of light. Surface mountable with clips (included), it is used as under wall unit. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K. On request, the length can be customized up to a maximum of 3 m.

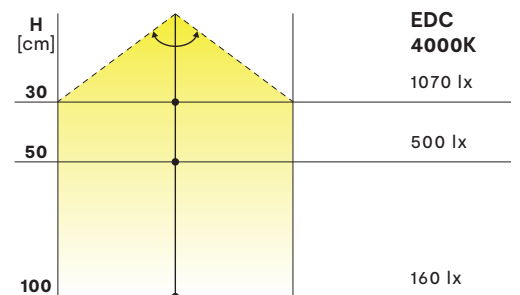







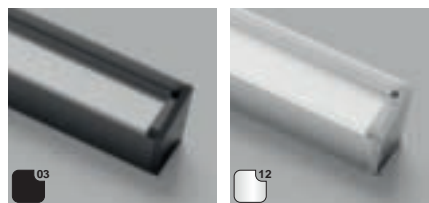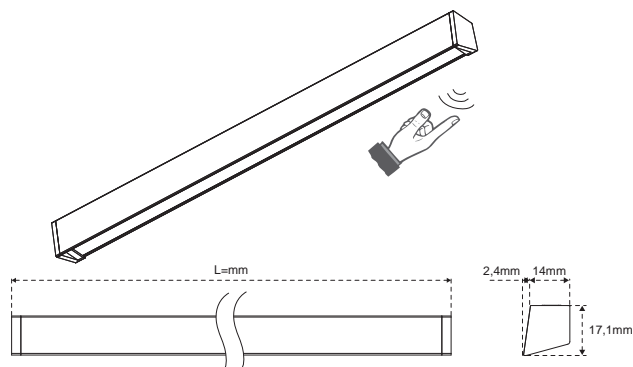





Dual Blue and Dual UV-A  
On request

900 mm  
456 lm  
40 lm/W  
CRI>80

















## OSAKA IRS EDC 24 V DC

	90900130300AHD	4,5 W	450 mm	3000-4000K
	90900131200AHD			
	90900140300AHD	6,5 W	600 mm	3000-4000K
	90900141200AHD			
	90900150300AHD	10,4 W	900 mm	3000-4000K
	90900151200AHD			
	90900160300AHD	14,3 W	1200 mm	3000-4000K
	90900161200AHD			
	90900170300AHD	18,2 W	1500 mm	3000-4000K
	90900171200AHD			
	90900180300AHD	22,1 W	1800 mm	3000-4000K
	90900181200AHD			

## OSAKA EDC 24 V DC

	90900070300AHD	5,2 W	450 mm	3000-4000K
	90900071200AHD			
	90900080300AHD	7,1 W	600 mm	3000-4000K
	90900081200AHD			
	90900090300AHD	11 W	900 mm	3000-4000K
	90900091200AHD			
	90900100300AHD	14,9 W	1200 mm	3000-4000K
	90900101200AHD			
	90900110300AHD	18,8 W	1500 mm	3000-4000K
	90900111200AHD			
	90900120300AHD	22,7 W	1800 mm	3000-4000K
	90900121200AHD			

## ACCESSORIES AND CONTROL



### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### MEC DRIVER

For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM


For the choice of control system go to page 268.




### MEC DRIVER

For the selection of the power supply system go to page 262.



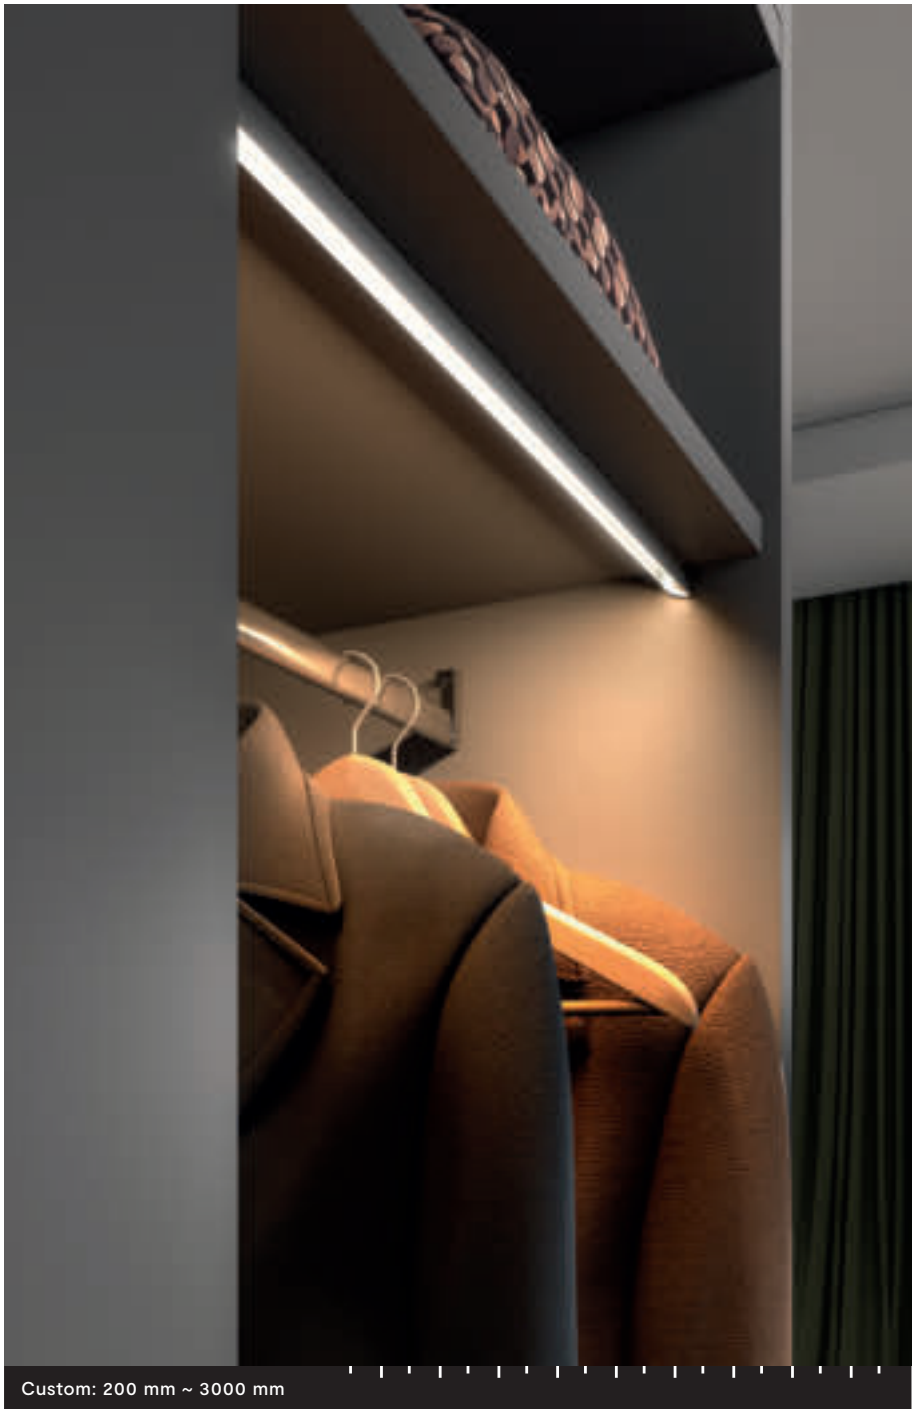


Custom: 200 mm ~ 3000 mm

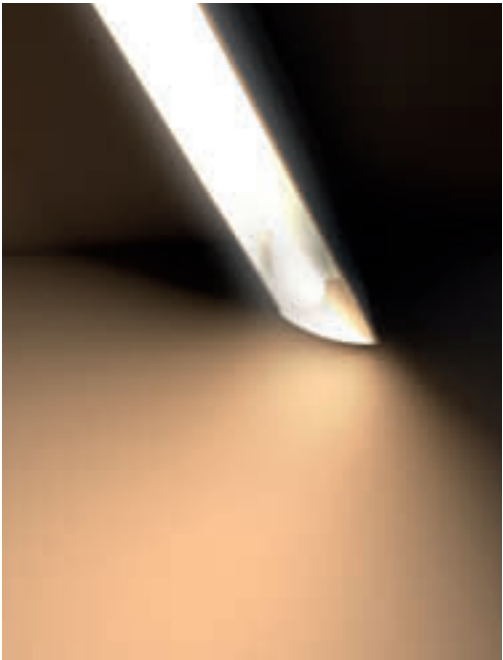

# Insider

## Inside cabinet

Insider is a linear aluminium profile characterized by a backward source that guarantees optimal visual comfort and a defined beam of light. Surface mountable with clips (included), it is used to light the inside of cabinets: the version with integrated PIR sensor allows it to be switched on and off when the door is opened and closed. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K. On request, the length can be customized up to a maximum of 3 m.

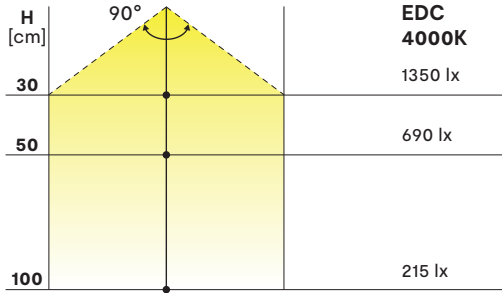


Dual Blue and Dual UV-A  
On request

863 mm  
477 lm  
43 lm/W  
CRI>80







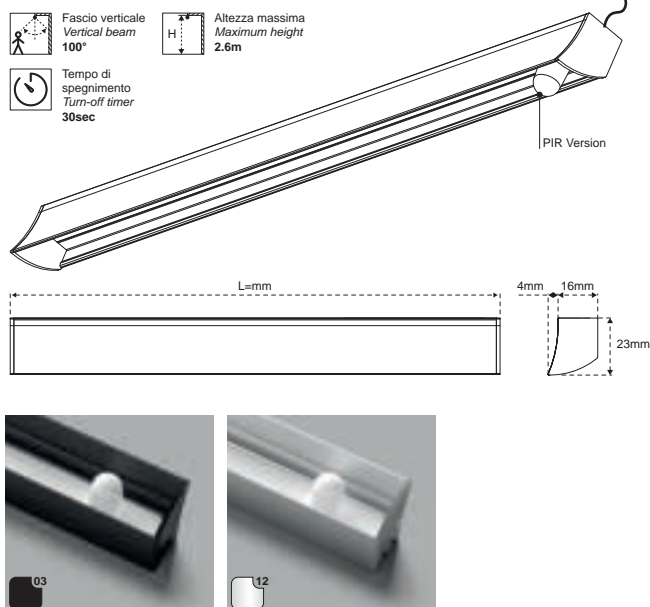





## Insider PIR



### INSIDER PIR EDC 12 V DC

24 V ON REQUEST

	28600190300AGD	4,6 W	413 mm	3000-4000K
	28600191200AGD			
	28600200300AGD	6,5 W	563 mm	3000-4000K
	28600201200AGD			
	28600210300AGD	10,4 W	863 mm	3000-4000K
	28600211200AGD			
	28600220300AGD	14,3 W	1163 mm	3000-4000K
	28600221200AGD			

### ACCESSORIES AND CONTROL



#### PIR SENSOR

The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.



#### EMOTION DUAL COLOUR

During installation, the colour temperature can be set to 'warm' or 'natural' white (3000-4000K). No need for emotion jumpers or remote controls.











#### MEC DRIVER

For the selection of the power supply system go to page 262

### INSIDER PIR 12 V DC

24 V ON REQUEST

	28600050300C_	4,2 W	413 mm	_N \ _W
	28600051200C_			
	28600060300C_	5,9 W	563 mm	_N \ _W
	28600061200C_			
	28600070300C_	9,4 W	863 mm	_N \ _W
	28600071200C_			
	28600080300C_	13,0 W	1163 mm	_N \ _W
	28600081200C_			

### ACCESSORIES AND CONTROL



#### PIR SENSOR

The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code





#### MEC DRIVER

For the selection of the power supply system go to page 262





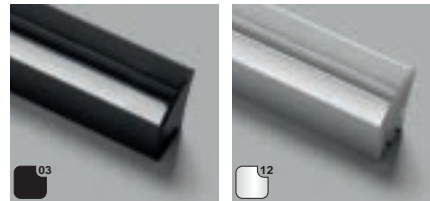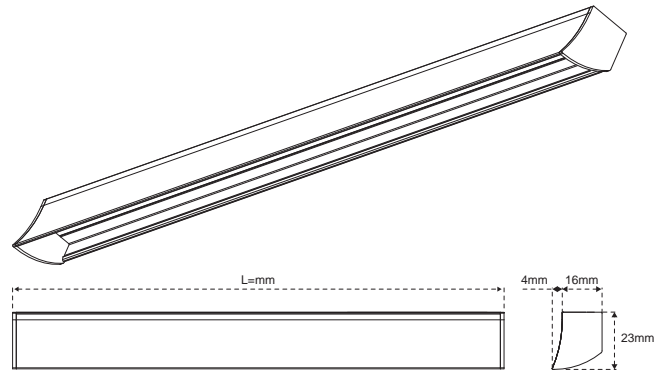





## Insider



### INSIDER EDC 12 V DC

24 V ON REQUEST

	28600010300AGD	5,2 W	413 mm	3000-4000K
	28600011200AGD			
	28600020300AGD	7,2 W	563 mm	3000-4000K
	28600021200AGD			
	28600030300AGD	11,1 W	863 mm	3000-4000K
	28600031200AGD			
	28600040300AGD	15,0 W	1163 mm	3000-4000K
	28600041200AGD			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268











#### MEC DRIVER

For the selection of the power supply system go to page 262

### INSIDER 12 V DC

24 V ON REQUEST

	28600010300C_	4,6 W	413 mm	_N \ _W
	28600011200C_			
	28600020300C_	6,2 W	563 mm	_N \ _W
	28600021200C_			
	28600030300C_	9,8 W	863 mm	_N \ _W
	28600031200C_			
	28600040300C_	13,3 W	1163 mm	_N \ _W
	28600041200C_			

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262










# Solaris UC Plus

## Under cabinet



Solaris-UC Plus is an under wall panel that allows you to illuminate the worktop in a comfortable and homogeneous way, thanks to the PMMA diffuser and the LED source Emotion Dual Colour with colour temperature variation from 3000K to 4000K. Surface installation with screws is simple; the connector included in the package allows modular configuration in a continuous row to suit the size of the wall unit. The version with integrated IR proximity switch allows ignition and temperature variation. Compatible with Kessembhömer accessories from the LINERO MosaiQ line.

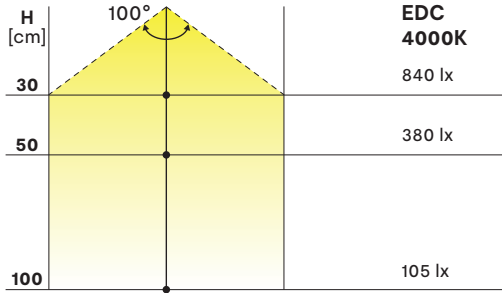





VIDEO

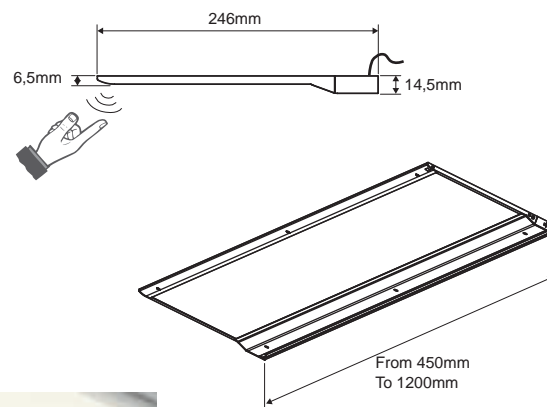

## Solaris UC Plus



### SOLARIS UC PLUS IR EDC 12 V DC

	22106531201ZD	7,2 W	450 mm	3000-4000K
	22106541201ZD	9,2 W	600 mm	3000-4000K
	22106551201ZD	12,3 W	900 mm	3000-4000K
	22106561201ZD	16 W	1200 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR





Colour temperature variation from 'warm' to 'natural' white (3000-4000K).




#### MEC DRIVER

For the selection of the power supply system go to page 262.

### SOLARIS UC PLUS IR EDC 12 V DC

	22106491201ZD	7,2 W	450 mm	3000-4000K
	22106501201ZD	9,2 W	600 mm	3000-4000K
	22106511201ZD	12,3 W	900 mm	3000-4000K
	22106521201ZD	16 W	1200 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM



For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.



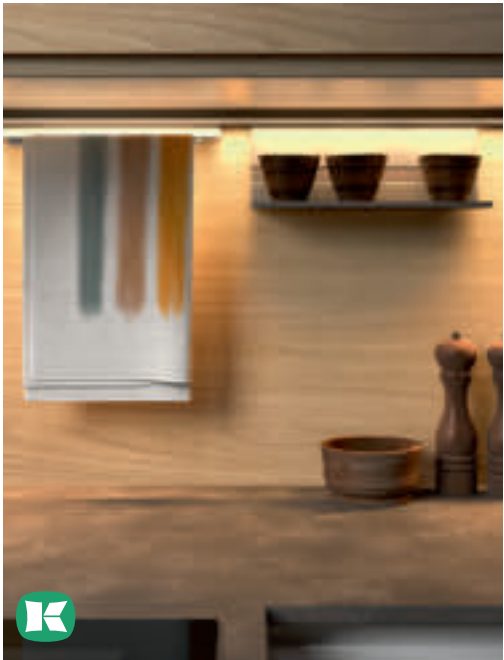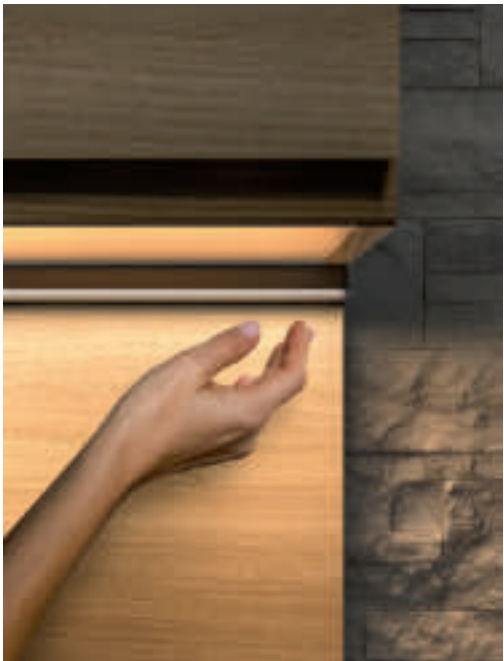


Custom: 200 mm ~ 3000 mm

# Ghibli KS


## Under cabinet

Ghibli KS is a linear under wall unit profile that can be customised with a line of Kesseböhmer shelves for objects that allow you to organise your workspace in the best possible way. The LED source Emotion Dual Colour allows the variation of the colour temperature from 3000K to 4000K ensuring optimal visual comfort. The version with integrated IR proximity switch allows ignition and temperature variation.

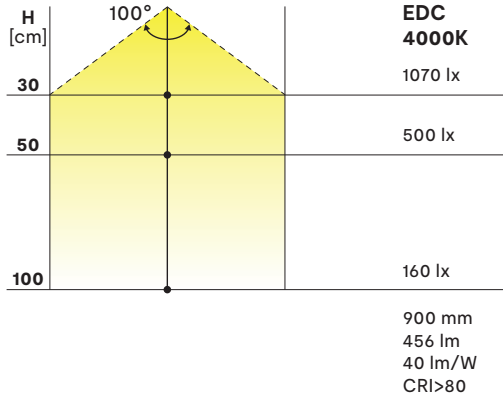





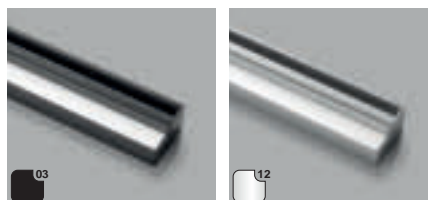








## Ghibli KS



### GHIBLI KS IRS EDC 12 V DC 24 V ON REQUEST

	27700330300AGD	4,9 W	450 mm	3000-4000K
	27700331200AGD			
	27700340300AGD	5,5 W	500 mm	3000-4000K
	27700341200AGD			
	27700350300AGD	6,8 W	600 mm	3000-4000K
	27700351200AGD			
	27700360300AGD	10,7 W	900 mm	3000-4000K
	27700361200AGD			
	27700370300AGD	14,6 W	1200 mm	3000-4000K
	27700371200AGD			
	27700380300AGD	22,4 W	1800 mm	3000-4000K
	27700381200AGD			
	27700390300AGD	30,2 W	2400 mm	3000-4000K
	27700391200AGD			

### GHIBLI KS EDC 12 V DC 24 V ON REQUEST

	27700260300AGD	5,6 W	450 mm	3000-4000K
	27700261200AGD			
	27700270300AGD	6,2 W	500 mm	3000-4000K
	27700271200AGD			
	27700280300AGD	7,5 W	600 mm	3000-4000K
	27700281200AGD			
	27700290300AGD	11,4 W	900 mm	3000-4000K
	27700291200AGD			
	27700300300AGD	15,3 W	1200 mm	3000-4000K
	27700301200AGD			
	27700310300AGD	23,1 W	1800 mm	3000-4000K
	27700311200AGD			
	27700320300AGD	30,9 W	2400 mm	3000-4000K
	27700321200AGD			

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.






Custom: 200 mm ~ 3000 mm



# Lugano IP44



## Under cabinet

Lugano IP44 is a linear profile under the wall unit with inclined optics that allows the emission of diffused and homogeneous light on the work surface. Installation, using clips included in the package, is simple and possible even in areas subject to water splashes, thanks to the protection index IP44. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The integrated IR proximity switch enables the ignition and temperature change in the EDC version. On request, the length can be customized up to a maximum of 3 m.

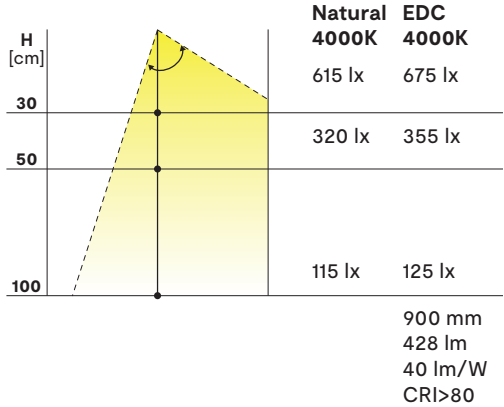



## Lugano IP44

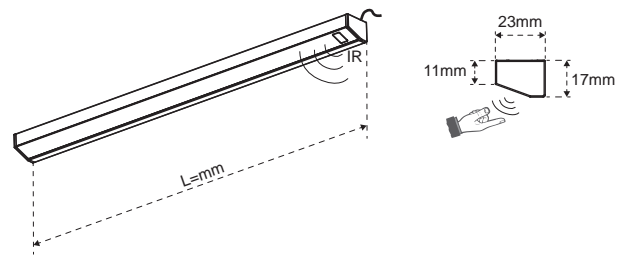

LUGANO IP44 IRS EDC 12 V		24 V ON REQUEST		
	20600961200AGD	4,9 W	450 mm	3000-4000K
	20600971200AGD	6,9 W	600 mm	3000-4000K
	20601001200AGD	10,7 W	900 mm	3000-4000K
	20601011200AGD	14,6 W	1200 mm	3000-4000K

LUGANO IP44 IRS 12 V		24 V ON REQUEST		
	20600961200C_	4,2 W	450 mm	_N \ _W
	20600971200C_	6,2 W	600 mm	_N \ _W
	20601001200C_	9,8 W	900 mm	_N \ _W
	20601011200C_	13,0 W	1200 mm	_N \ _W

LUGANO IP44 EDC 12 V		24 V ON REQUEST		
	20600561200AGD	5,5 W	450 mm	3000-4000K
	20600571200AGD	7,5 W	600 mm	3000-4000K
	20600581200AGD	11,4 W	900 mm	3000-4000K
	20600591200AGD	15,3 W	1200 mm	3000-4000K

LUGANO IP44 12 V		24 V ON REQUEST		
	20600561200C_	5,5 W	450 mm	_N \ _W
	20600571200C_	7,2 W	600 mm	_N \ _W
	20600581200C_	10,7 W	900 mm	_N \ _W
	20600591200C_	13,7 W	1200 mm	_N \ _W

### ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for switching on and off, hold position for 5 seconds for colour adjustment.



**VERSIONE EMOTION DUAL COLOUR**  
Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




**SMART SYSTEM**  
For the choice of control system go to page 268.



**MEC DRIVER**  
For the selection of the power supply system go to page 262.



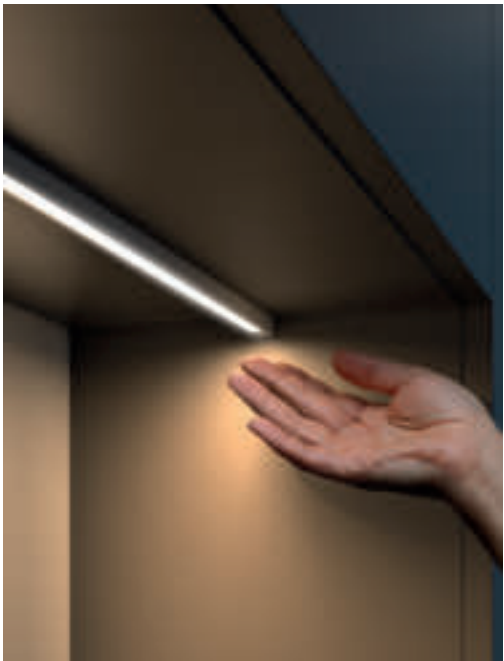


# Bali

## Under cabinet \ inside cabinet

Bali is a linear profile in discreet and versatile anodized aluminium, suitable for surface installation with clips (included in the package), which can be used as an under wall unit or as a hanging interior. The LED source is available with Natural (4000K), or Warm (3000K) colour temperature, the version with integrated IR proximity switch allows to switch on the lamp. On request, the length can be customized up to a maximum of 3 m.

H [cm]	100°	Natural 4000K	EDC 4000K
30		615 lx	675 lx
50		320 lx	355 lx
100		115 lx	125 lx



900 mm  
428 lm  
40 lm/W  
CRI>80

 Dual Blue and Dual UV-A  
On request





# Bali

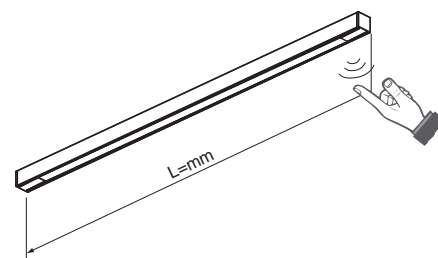

## BALI IRS EDC 12 V DC

24 V ON REQUEST

	15903301200AGD	4,2 W	450 mm	_N \ _W
	15903311200AGD	6,2 W	600 mm	_N \ _W
	15903321200AGD	10,1 W	900 mm	_N \ _W
	15903331200AGD	14,0 W	1200 mm	_N \ _W

## ACCESSORIES AND CONTROL



### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### MEC DRIVER

For the selection of the power supply system go to page 262

## BALI TOUCH 12 V DC

24 V ON REQUEST

	15902371200C_	3,9 W	450 mm	_N \ _W
	15902381200C_	5,9 W	600 mm	_N \ _W
	15902391200C_	9,1 W	900 mm	_N \ _W
	15902401200C_	12,7 W	1200 mm	_N \ _W

## ACCESSORIES AND CONTROL



### TOUCH SENSOR

On, off and light intensity adjustment



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### MEC DRIVER

For the selection of the power supply system go to page 262

## BALI 12 V DC

24 V ON REQUEST

	15902331200C_	4,6 W	450 mm	_N \ _W
	15902341200C_	6,2 W	600 mm	_N \ _W
	15902351200C_	9,8 W	900 mm	_N \ _W
	15902361200C_	13,3 W	1200 mm	_N \ _W

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM


For the choice of control system go to page 268



### MEC DRIVER

For the selection of the power supply system go to page 262



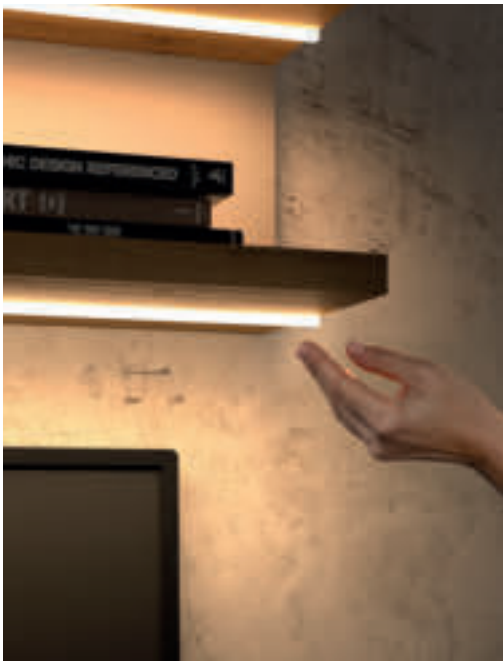

# Kubi

## Under cabinet \ inside cabinet

Kubi is a linear profile in opal polycarbonate that allows the emission of diffused and homogeneous light on three sides. Discreet and versatile, it is suitable for installation with double-sided adhesive tape (included) and it is used as an under wall unit or hanging interior. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The version with integrated IR proximity switch allows lighting and temperature variation. On request, the length can be customized up to a maximum of 3 m.

H [cm]	110°	Natural 4000K	EDC 4000K
30		990 lx	1080 lx
50		480 lx	510 lx
100		130 lx	150 lx

863 mm  
700 lm  
54 lm/W  
CRI>80





# Kubi



## KUBI EDC 12 V




24 V ON REQUEST

	25900010100ADD	5,2 W	450 mm	3000-4000K
	25900020100ADD	7,2 W	600 mm	3000-4000K
	25900030100ADD	11,1 W	900 mm	3000-4000K
	25900040100ADD	15 W	1200 mm	3000-4000K

## KUBI 12 V

24 V ON REQUEST

	25900010100AN_	4,4 W	450 mm	_N \ _W
	25900020100AN_	6,2 W	600 mm	_N \ _W
	25900030100AN_	9,3 W	900 mm	_N \ _W
	25900040100AN_	12,7 W	1200 mm	_N \ _W



## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM

For the choice of control system go to page 268.







### MEC DRIVER





For the selection of the power supply system go to page 262.




# Kubi IRS



KUBI IRS EDC 12 V		24 V ON REQUEST		
	25900050100ADD	4,9 W	450 mm	3000-4000K
	25900060100ADD	6,8 W	600 mm	3000-4000K
	25900070100ADD	10,7 W	900 mm	3000-4000K
	25900080100ADD	14,6 W	1200 mm	3000-4000K

KUBI IRS 12V		24 V ON REQUEST		
	25900050100AN_	4,2 W	450 mm	_N \ _W
	25900060100AN_	5,8 W	600 mm	_N \ _W
	25900070100AN_	9,1 W	900 mm	_N \ _W
	25900080100AN_	12,3 W	1200 mm	_N \ _W

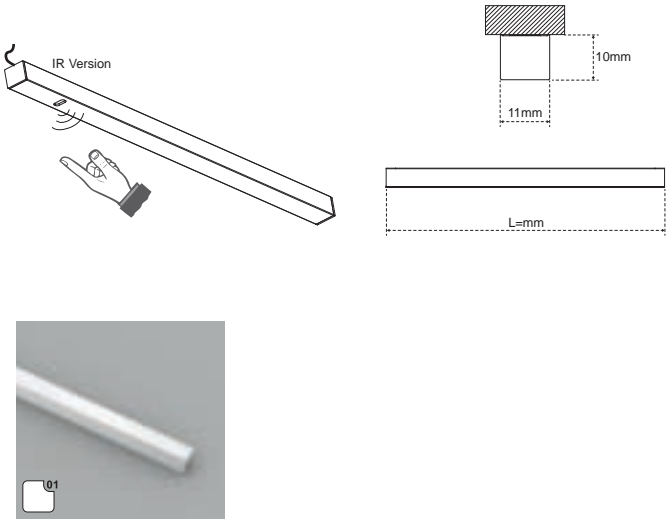

## ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for on and off, hold position for 5 seconds for colour adjustment.



**EMOTION DUAL COLOUR**  
Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**MEC DRIVER**  
For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for switching on and off.



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code






**MEC DRIVER**  
For the selection of the power supply system go to page 262.







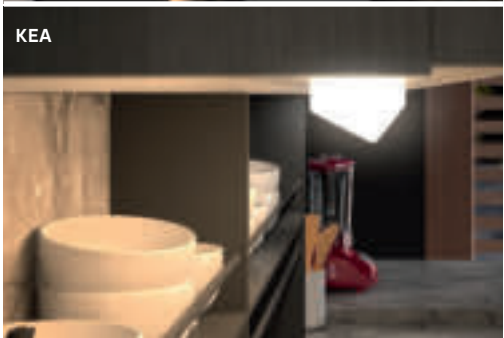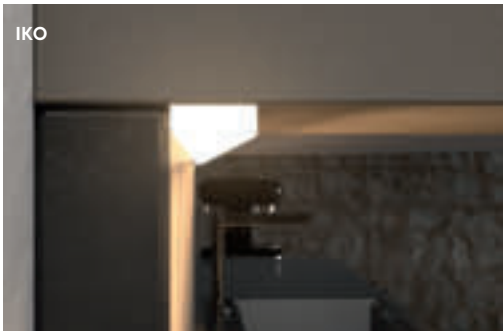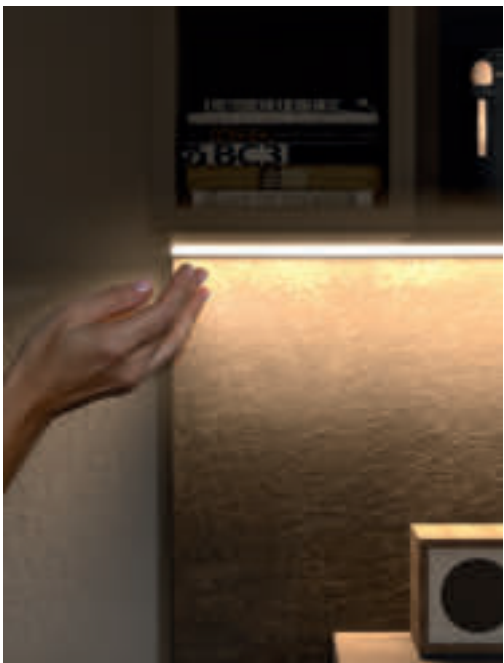

# Iko \ Kea

## Under cabinet \ inside cabinet

Iko and Kea are linear, angular profiles in opaline polycarbonate that allow the emission of diffused and homogeneous light on the worktop. Discreet and versatile, they are suitable for installation with double-sided adhesive tape (included) and can be used as an under wall unit or hanging interior. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The version with integrated IR proximity switch allows ignition and temperature variation. On request, the length can be customized up to a maximum of 3 m.

H [cm]		Natural 4000K	EDC 4000K
30		675 lx	615 lx
50		355 lx	320 lx
100		125 lx	115 lx

900 mm  
444 lm  
40 lm/W  
CRI>80









## Iko \ Kea







### IKO EDC 12 V

24 V ON REQUEST

	<b>26200010100ADD</b>	5,2 W	450 mm	3000-4000K
	<b>26200020100ADD</b>	7,2 W	600 mm	3000-4000K
	<b>26200030100ADD</b>	11,1 W	900 mm	3000-4000K
	<b>26200040100ADD</b>	15 W	1200 mm	3000-4000K





### KEA EDC 12 V

24 V ON REQUEST

	<b>26300010100ADD</b>	5,2 W	450 mm	3000-4000K
	<b>26300020100ADD</b>	7,2 W	600 mm	3000-4000K
	<b>26300030100ADD</b>	11,1 W	900 mm	3000-4000K
	<b>26300040100ADD</b>	15 W	1200 mm	3000-4000K





### IKO 12 V


24 V ON REQUEST

	<b>26200010100AN_</b>	4,4 W	450 mm	_N \ _W
	<b>26200020100AN_</b>	6,2 W	600 mm	_N \ _W
	<b>26200030100AN_</b>	9,5 W	900 mm	_N \ _W
	<b>26200040100AN_</b>	12,7 W	1200 mm	_N \ _W

### KEA 12 V

24 V ON REQUEST

	<b>26300010100AN_</b>	4,4 W	450 mm	_N \ _W
	<b>26300020100AN_</b>	6,2 W	600 mm	_N \ _W
	<b>26300030100AN_</b>	9,5 W	900 mm	_N \ _W
	<b>26300040100AN_</b>	12,7 W	1200 mm	_N \ _W

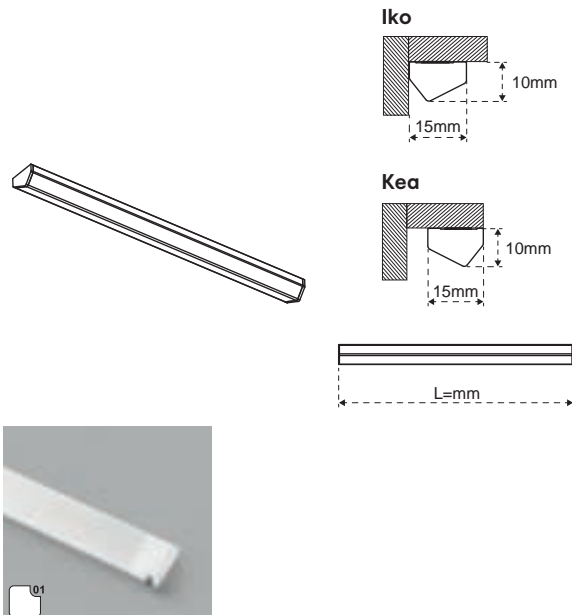

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262



## Iko \ Kea



### IKO IRS EDC 12 V

24 V ON REQUEST

	26200050100ADD	4,9 W	450 mm	3000-4000K
	26200060100ADD	6,8 W	600 mm	3000-4000K
	26200070100ADD	10,7 W	900 mm	3000-4000K
	26200080100ADD	14,6 W	1200 mm	3000-4000K

### KEA IRS EDC 12 V

24 V ON REQUEST

	26300050100ADD	4,9 W	450 mm	3000-4000K
	26300060100ADD	6,8 W	600 mm	3000-4000K
	26300070100ADD	10,7 W	900 mm	3000-4000K
	26300080100ADD	14,6 W	1200 mm	3000-4000K

### IKO IRS 12 V


24 V ON REQUEST

	26200050100AN_	4,2 W	450 mm	_N \ _W
	26200060100AN_	5,8 W	600 mm	_N \ _W
	26200070100AN_	9,2 W	900 mm	_N \ _W
	26200080100AN_	12,3 W	1200 mm	_N \ _W

### KEA IRS 12 V

24 V ON REQUEST

	26300050100AN_	4,2 W	450 mm	_N \ _W
	26800060100AN_	5,8 W	600 mm	_N \ _W
	26800070100AN_	9,2 W	900 mm	_N \ _W
	26800080100AN_	12,3 W	1200 mm	_N \ _W

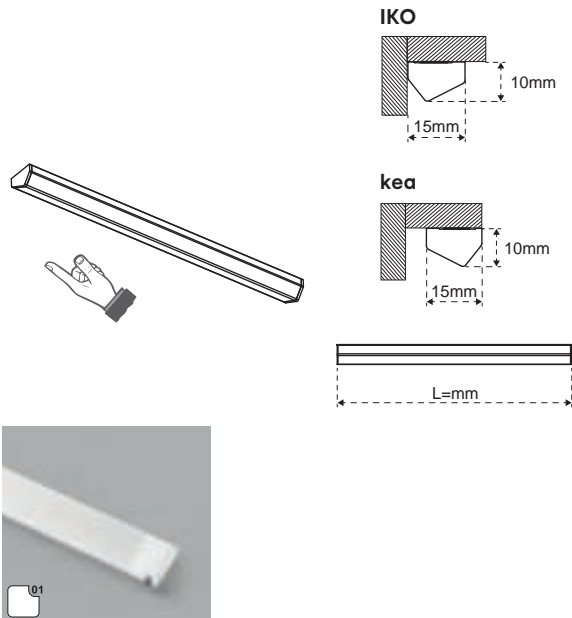

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for switching on and off.



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




#### MEC DRIVER

For the selection of the power supply system go to page 262








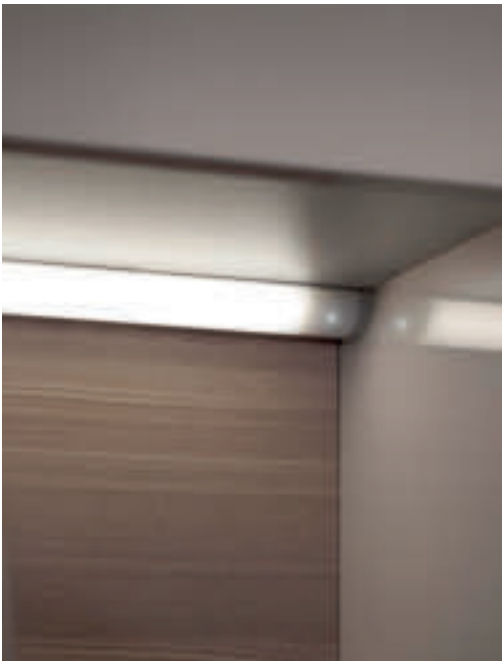

# Mini Corner



## Under cabinet

Mini Corner is an angular, linear profile in anodized aluminium, suitable for surface installation with clips (included in the package), which is used as an under wall unit or hanging interior. The LED source is available with Natural (4000K) or Warm (3000K) colour temperature, the version with integrated Touch switch allows the lamp to be switched on and dimmed in three steps. The connector, included in the package, allows the modular configuration on a continuous row.

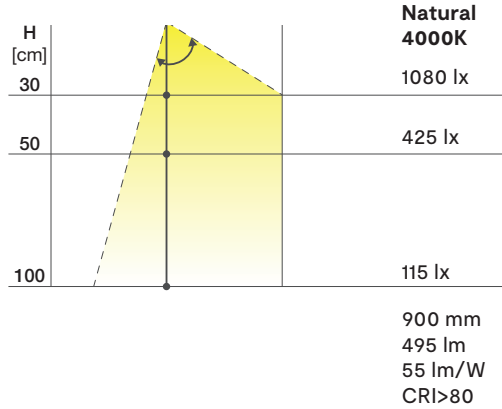








## Mini Corner



### MINI CORNER TOUCH 12 V

	23500011200ZN	4,0 W	450 mm	4000K
	23500021200ZN	4,5 W	500 mm	4000K
	23500031200ZN	6,0 W	600 mm	4000K
	23500041200ZN	9,0 W	900 mm	4000K
	23500051200ZN	12,0 W	1200 mm	4000K

### ACCESSORIES AND CONTROL



**TOUCH SENSOR**  
On, off and light intensity adjustment








**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)



**MEC DRIVER**  
For the selection of the power supply system go to page 262

### MINI CORNER 12 V

	23500061200ZN	4,0 W	450 mm	4000K
	23500071200ZN	4,5 W	500 mm	4000K
	23500081200ZN	6,0 W	600 mm	4000K
	23500091200ZN	9,0 W	900 mm	4000K
	23500101200ZN	12,0 W	1200 mm	4000K

### ACCESSORIES AND CONTROL



**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)




**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262




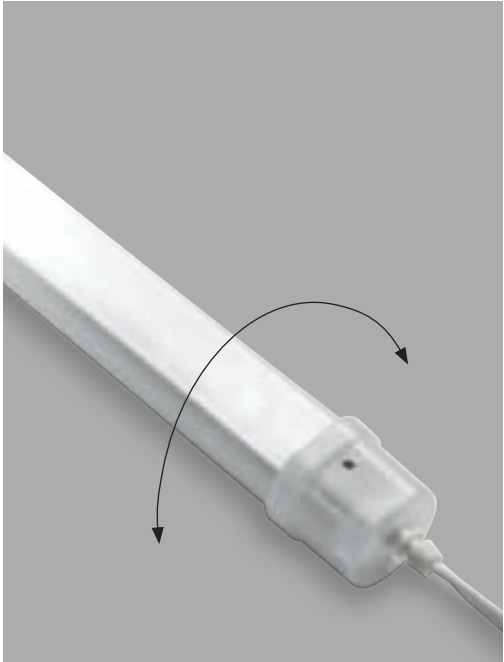

# Skuba


## Under drainer

Skuba is a linear profile to be placed under the dish drainer with diffused light emission and IP44 protection index. Installation is simple, thanks to the clips included in the package. The LED source is available with Natural (4000K) or Warm (3000K) colour temperature, and the integrated Touch switch allows the lamp to be switched on and dimmed in three steps. On request, the length can be customized up to a maximum of 3 m.

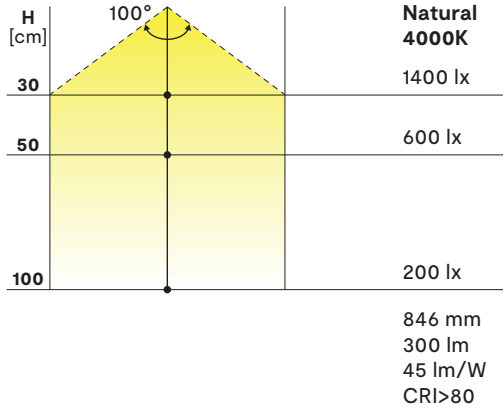









Skuba



SKUBA 12 V

	18500010001CN	3,5 W	480 mm	4000K
	18500020001CN	5,0 W	663 mm	4000K
	18500030001CN	6,5 W	846 mm	4000K



ACCESSORIES AND CONTROL



**TOUCH SENSOR**  
On, off and light intensity adjustment



**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)



**MEC DRIVER**  
For the selection of the power supply system go to page 262






# Lumi



## Under cabinet

Lumi is a linear profile in discreet and versatile anodized aluminium, suitable for surface installation with clips (included in the package), which can be used as an under wall unit or as a hanging interior. The LED source is available with Natural (4000K) or Warm (3000K) colour temperature, the version with integrated Touch switch allows the lamp to be switched on and dimmed in three steps. The connector, included in the package, allows the modular configuration on a continuous row.

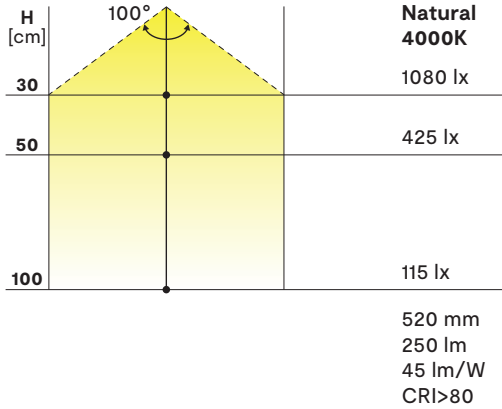



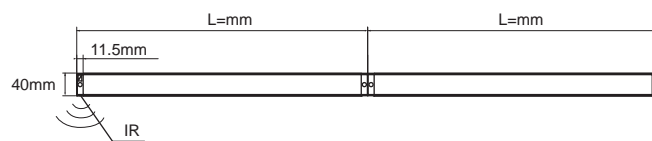

# Lumi



## LUMI IRS 12 V

	23600011200ZN	3,5 W	370 mm	4000K
	23600021200ZN	5,5 W	520 mm	4000K

## ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for switching on and off.





**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)



**MEC DRIVER**  
For the selection of the power supply system go to page 262

## LUMI 12 V

	23600031200ZN	3,5 W	370 mm	4000K
	23600041200ZN	5,5 W	520 mm	4000K

## ACCESSORIES AND CONTROL



**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)




**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262




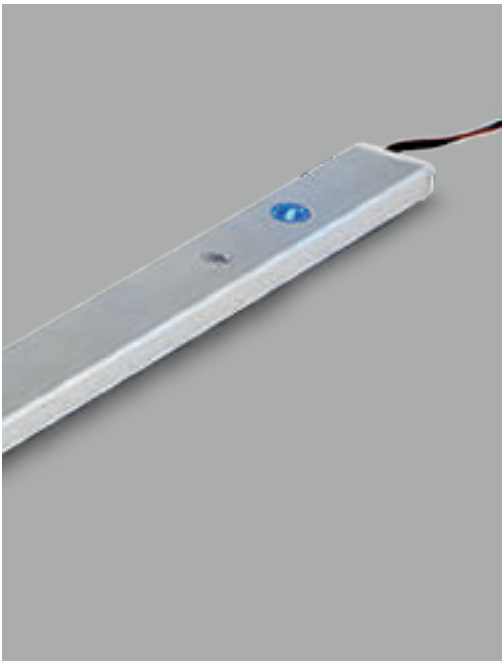

# Starlight


## Under cabinet

Starlight is a linear profile in anodised aluminium: discreet and versatile, it can be used as an under-cabinet lighting solution. The LED source is available with Natural temperature colour (4000K), the integrated IR switch, equipped with blue signalling LEDs, allows the lamp to be switched on. Single chip technology projects a line of light cones onto the wall.

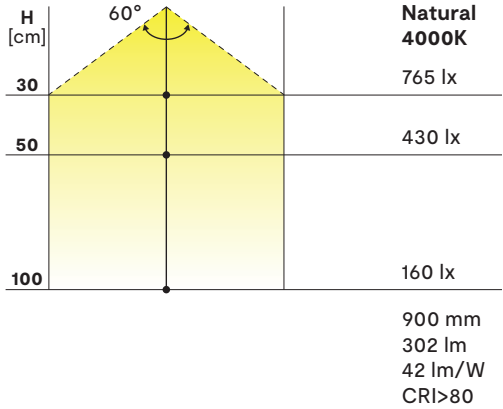




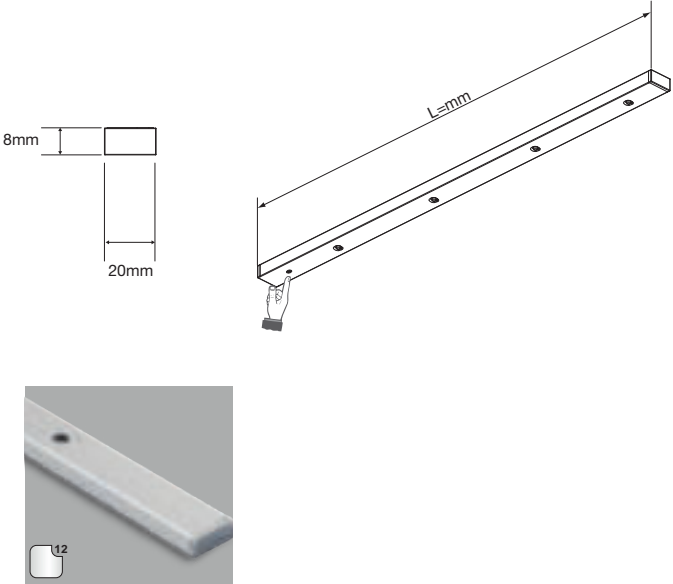


Starlight



LINEAR



STARLIGHT 12 V

	27800011200ZN	6,2 W	600 mm	4000K
	27800021200ZN	7,2 W	900 mm	4000K
	27800031200ZN	9,6 W	1200 mm	4000K

ACCESSORIES AND CONTROL



**TOUCH SENSOR**  
On, off and three steps of light intensity adjustment



**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)



**MEC DRIVER**  
For the selection of the power supply system go to page






Custom: 200 mm ~ 3000 mm



# Mec Rack



## Clothes hanger

Mec Rack is a clothes rack with integrated light and PIR motion sensor for on/off function. The LED source is available in Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. On request, the length can be customized up to a maximum of 3 m. The screws and the brackets for the installation are included in the package.

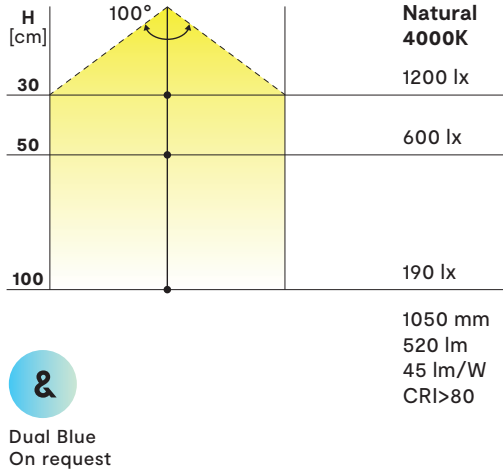



# Mec Rack

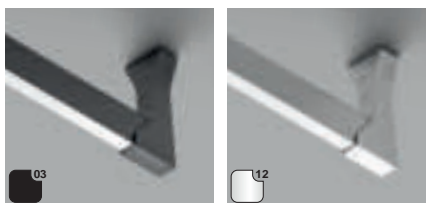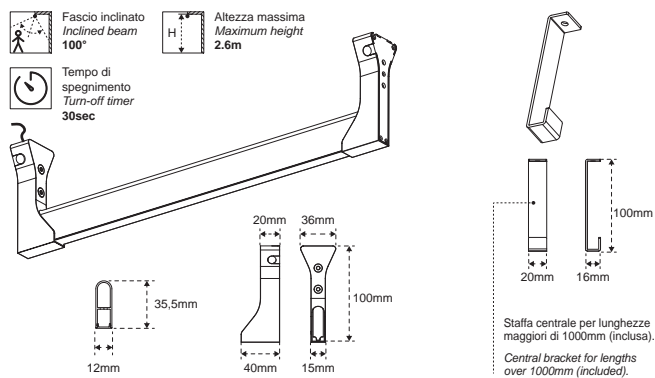

## MEC RACK PIR DX 12 V

24 V ON REQUEST

	13110870300AUD	6,2 W	540 mm	3000-4000K
	13110871200AUD			
	13110880300AUD	8,8 W	750 mm	3000-4000K
	13110881200AUD			
	13110890300AUD	10,4 W	870 mm	3000-4000K
	13110891200AUD			
	13110900300AUD	13 W	1050 mm	3000-4000K
	13110901200AUD			

## ACCESSORIES AND CONTROL



### PIR SENSOR

The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.



### EMOTION DUAL COLOUR


The colour temperature varies from 'warm' to 'natural' white (3000-4000K). Emotion jumper integrated into the lamp.



### MEC DRIVER

For the selection of the power supply system go to page 262.



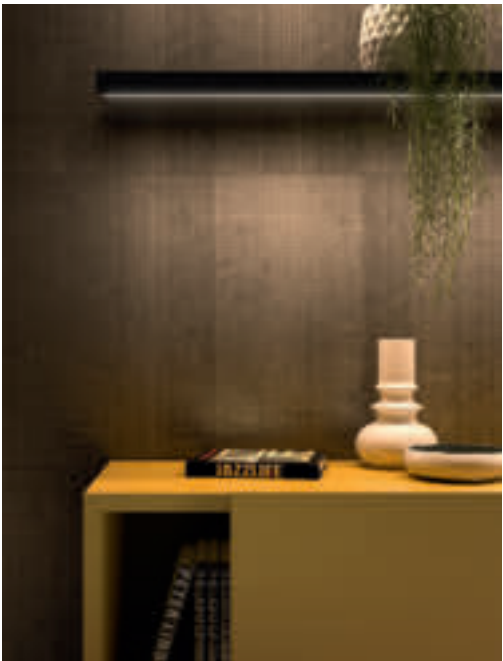


Custom: 200 mm ~ 3000 mm

# Mini Noor




## Recessed under cabinet \ inside cabinet

Mini Noor is a discreet and versatile linear light for recessed mounting. It offers easy recessed installation with fixing springs already attached to the light. With a 35° angled light output it's the perfect solution for under-shelf lighting. It's also ideal to illuminate cabinet interiors with installation in the side panels.

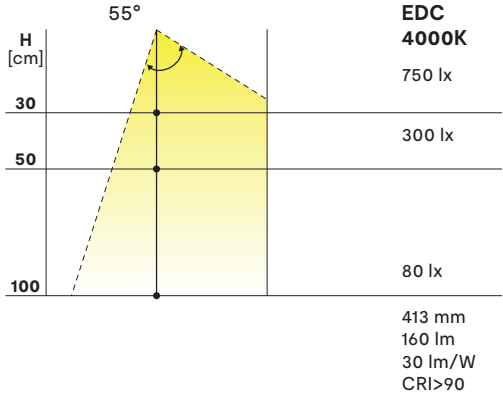




## Mini Noor 24 V

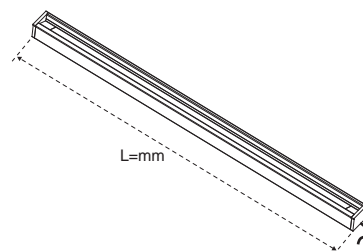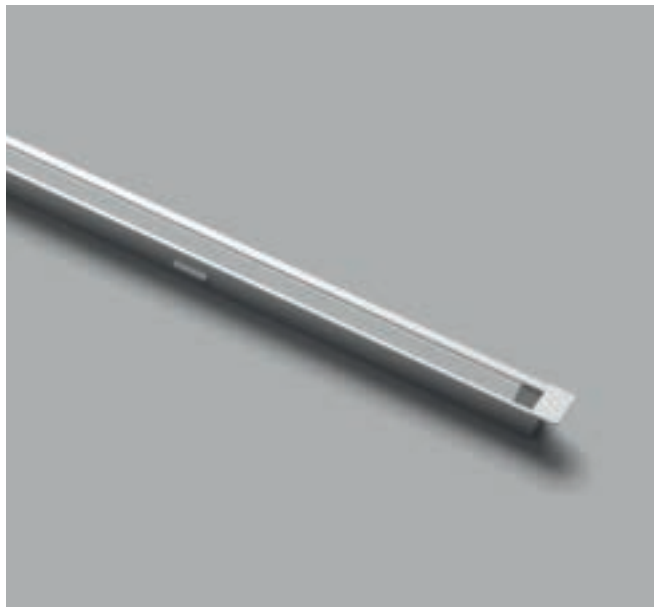

Drill Dimension /  
Dimensione fresata



### MINI NOOR EDC 24 V DC

	90600010300BED	5,1 W	413 mm	3000-4000K
	90600011200BED			
	90600020300BED	7,1 W	563 mm	3000-4000K
	90600021200BED			
	90600030300BED	11,1 W	863 mm	3000-4000K
	90600031200BED			
	90600040300BED	15,2 W	1163 mm	3000-4000K
	90600041200BED			

### MINI NOOR 24 V DC

	90600010300AZ_	6,2 W	413 mm	_N \ _W
	90600011200AZ_			
	90600020300AZ_	8,7 W	563 mm	_N \ _W
	90600021200AZ_			
	90600030300AZ_	13,6 W	863 mm	_N \ _W
	90600031200AZ_			
	90600040300AZ_	18,6 W	1163 mm	_N \ _W
	90600041200AZ_			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM


For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.




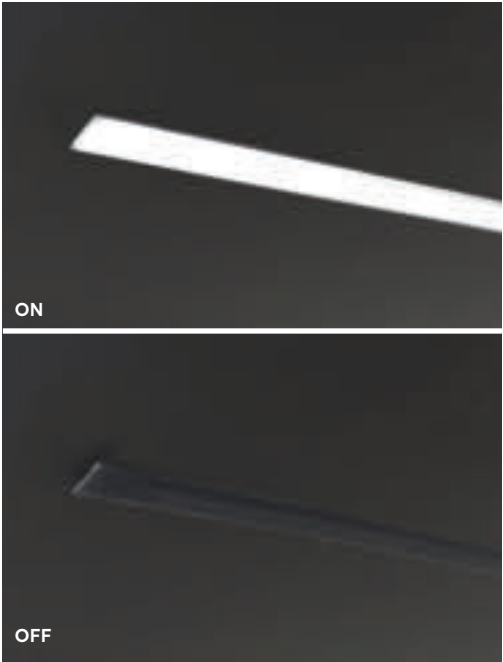

# Mini Kendo

Recessed under cabinet \ inside cabinet

Mini Kendo is a linear recessed profile in opaline polycarbonate and it is available in two different versions: with a thin flange or fully recessed ("IN" version). The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature, which allows the variation from 3000K to 4000K for optimal visual comfort. On request, the length can be customized up to a maximum of 3 m. The clips for milling installation are included in the package.

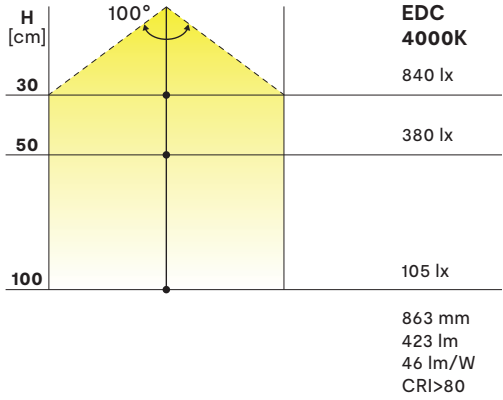







## Mini Kendo







### MINI KENDO EDC 12 V DC



24 V ON REQUEST

	29300050100ADD	4,2 W	372 mm	3000-4000K
	29300060100ADD	5,9 W	500 mm	3000-4000K
	29300070100ADD	9,4 W	760 mm	3000-4000K
	29300080100ADD	12,4 W	1000 mm	3000-4000K

### MINI KENDO 12 V DC

24 V ON REQUEST


	29300010100AN_	3,7 W	372 mm	3000-4000K
	29300020100AN_	5,2 W	500 mm	3000-4000K
	29300030100AN_	7,9 W	760 mm	3000-4000K
	29300040100AN_	10,7 W	1000 mm	3000-4000K

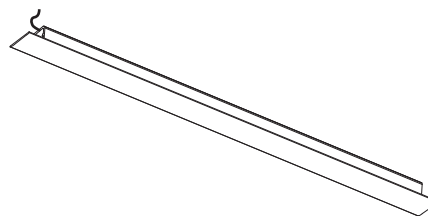

#### MINI KENDO

Dimensione Fresata /  
Drill Dimension /  
Ausmaß der Fräsarbeit /  
Medida del corte /  
Mesures fraise

L= Lamp length - 14mm



### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM

For the choice of control system go to page 268.




#### MEC DRIVER

For the selection of the power supply system go to page 262.




## Mini Kendo.In

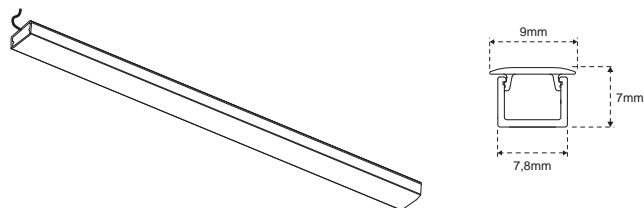

### MINI KENDO.IN

Dimensione Fresata /  
Drill Dimension /  
Ausmaß der Fräsarbeit /  
Medida del corte /  
Mesures fraise

L= Lamp length



MINI KENDO.IN EDC 12 V DC		24 V ON REQUEST		
	28900010100ADD	4,9 W	413 mm	3000-4000K
	28900020100ADD	6,8 W	563 mm	3000-4000K
	28900030100ADD	10,7 W	863 mm	3000-4000K
	28900040100ADD	15 W	1163 mm	3000-4000K

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

MINI KENDO.IN 12 V DC		24 V ON REQUEST		
	28900010100AN_	4,2 W	413 mm	3000-4000K
	28900020100AN_	5,9 W	563 mm	3000-4000K
	28900030100AN_	9,2 W	863 mm	3000-4000K
	28900040100AN_	12,5 W	1163 mm	3000-4000K

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM

For the choice of control system go to page 268.





### MEC DRIVER

For the selection of the power supply system go to page 262.





# Mini Kendo Black

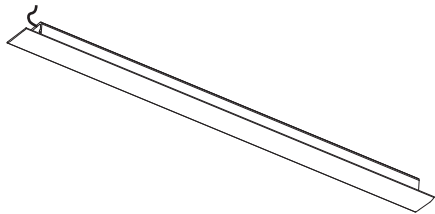





## MINI KENDO

Dimensione Fresata /  
Drill Dimension /  
Ausmaß der Fräsarbeit /  
Medida del corte /  
Mesures fraise

L= Lamp length - 14mm



## MINI KENDO BLACK EDC 24 V DC

	29300050300BFD	6,5 W	372 mm	3000-4000K
	29300060300BFD	8,8 W	500 mm	3000-4000K
	29300070300BFD	13,4 W	760 mm	3000-4000K
	29300080300BFD	18 W	1000 mm	3000-4000K

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM


For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.



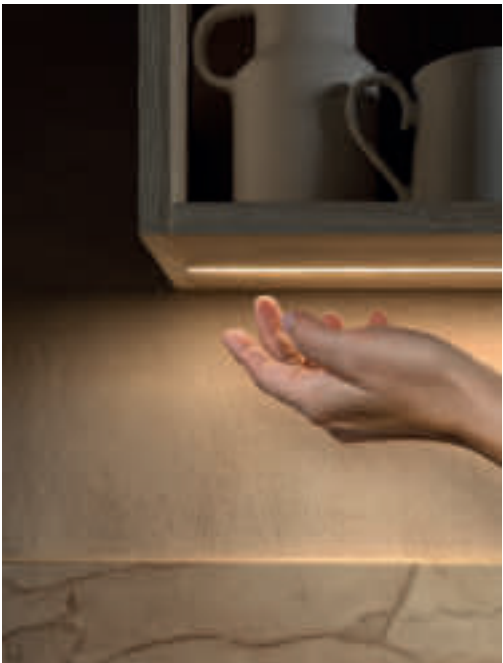

Custom: 200 mm ~ 3000 mm

# Kendo

## Recessed under cabinet \ inside cabinet

Kendo is a linear recessed profile in opaline polycarbonate, available either with a thin flange or fully recessed (Kendo. IN version). The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The version with integrated IR proximity switch allows lighting and temperature variation. On request, the length can be customized up to a maximum of 3 m.

H [cm]	100°	Natural 4000K	EDC 4000K
30		825 lx	900 lx
50		390 lx	425 lx
100		125 lx	135 lx

760 mm  
364 lm  
40 lm/W  
CRI>80



Dual UV-A  
Disponibile su richiesta



## Kendo



### KENDO EDC 12 V DC





24 V ON REQUEST

	24900030100ADD	4,2 W	372 mm	3000-4000K
	24900040100ADD	5,9 W	500 mm	3000-4000K
	24900050100ADD	9,1 W	760 mm	3000-4000K
	24900060100ADD	12,4 W	1000 mm	3000-4000K

### KENDO 12 V DC

24 V ON REQUEST

	24900030100AN_	3,7 W	372 mm	_N \ _W
	24900040100AN_	5,1 W	500 mm	_N \ _W
	24900050100AN_	7,9 W	760 mm	_N \ _W
	24900060100AN_	10,6 W	1000 mm	_N \ _W



### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM

For the choice of control system go to page 268.



#### MEC DRIVER

For the selection of the power supply system go to page 262.



## Kendo IRS



### KENDO IRS EDC 12 V DC


24 V ON REQUEST

	24900030100ADD	3,9 W	372 mm	3000-4000K
	24900031100ADD	5,5 W	500 mm	3000-4000K
	24900032100ADD	8,8 W	760 mm	3000-4000K
	24900033100ADD	12 W	1000 mm	3000-4000K

### KENDO IRS 12 V DC

24 V ON REQUEST

	24900300100AN_	3,3 W	372 mm	_N \ _W
	24900310100AN_	4,7 W	500 mm	_N \ _W
	24900320100AN_	7,6 W	760 mm	_N \ _W
	24900330100AN_	10,2 W	1000 mm	_N \ _W

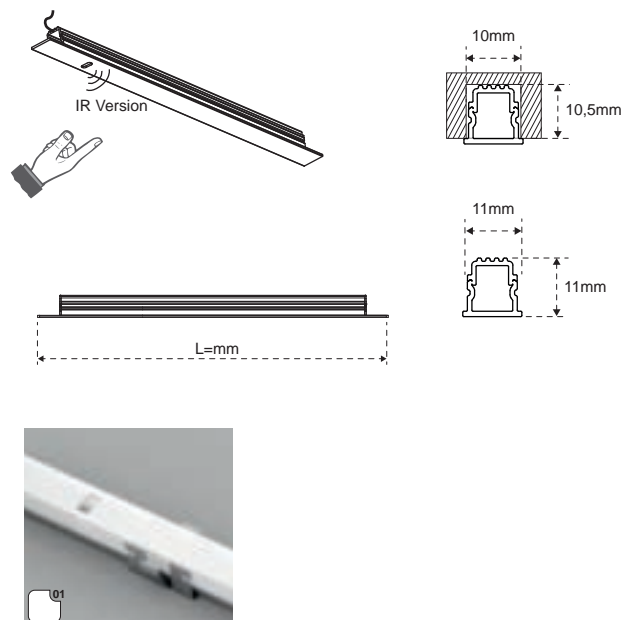

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for switching on and off.



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER

For the selection of the power supply system go to page 262.





## KENDO.IN EDC 12 V DC


24 V ON REQUEST

	26100010100ADD	4,9 W	413 mm	3000-4000K
	26100020100ADD	6,8 W	563 mm	3000-4000K
	26100030100ADD	10,7 W	863 mm	3000-4000K
	26100040100ADD	14,6 W	1163 mm	3000-4000K

## KENDO.IN 12 V DC

24 V ON REQUEST

	26100010100AN_	4,2 W	413 mm	_N \ _W
	26100020100AN_	5,8 W	563 mm	_N \ _W
	26100030100AN_	9,1 W	863 mm	_N \ _W
	26100040100AN_	12,5 W	1163 mm	_N \ _W

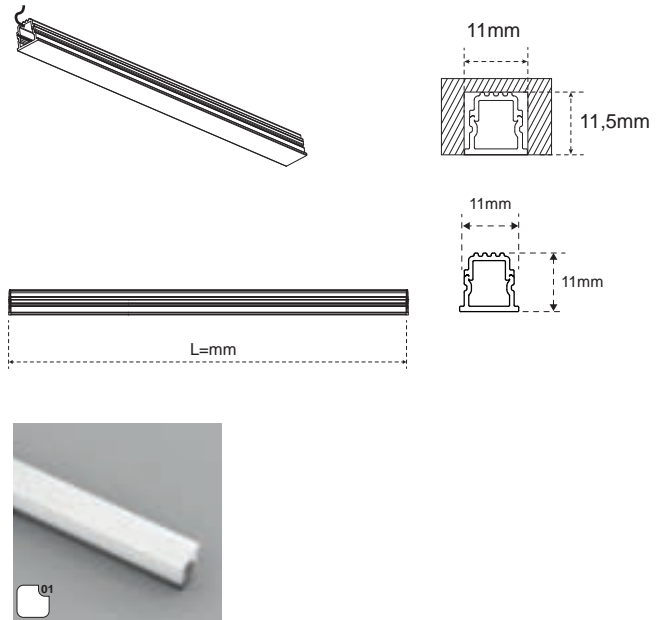

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.



## Kendo.IN IRS



### KENDO.IN IRS EDC 12 V DC


24 V ON REQUEST

	26100240100ADD	4,6 W	413 mm	3000-4000K
	26100250100ADD	6,5 W	563 mm	3000-4000K
	26100260100ADD	10,4 W	863 mm	3000-4000K
	26100270100ADD	14,3W	1163 mm	3000-4000K

### KENDO.IN IRS 12 V DC

24 V ON REQUEST

	26100240100AN_	3,9 W	413 mm	_N \ _W
	26100250100AN_	5,5 W	563 mm	_N \ _W
	26100260100AN_	8,8 W	863 mm	_N \ _W
	26100270100AN_	12,0 W	1163 mm	_N \ _W

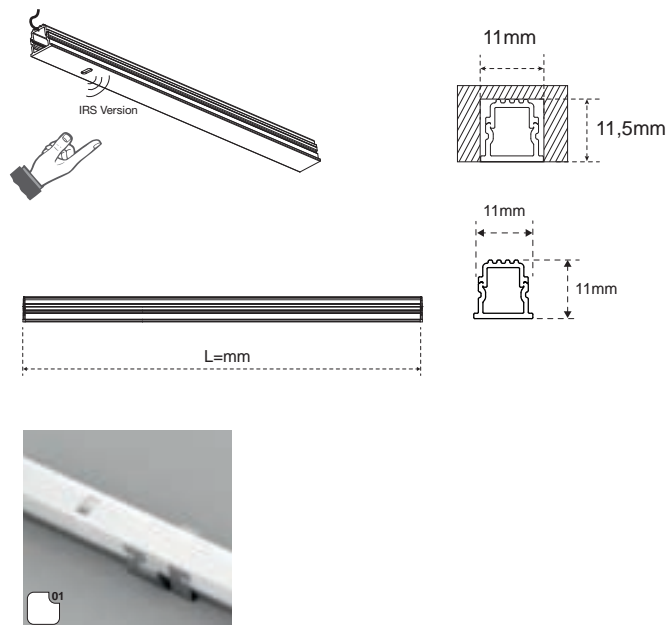

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for switching on and off.



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER

For the selection of the power supply system go to page 262.










Custom: 200 mm ~ 3000 mm

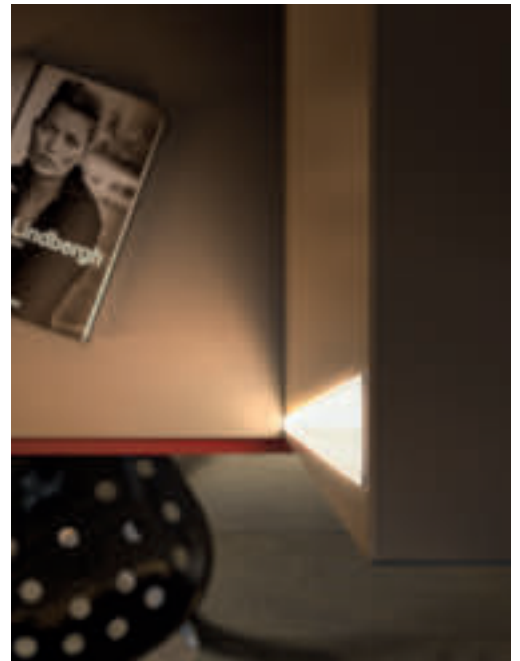

# Kaleo

## Recessed under cabinet \ inside cabinet

Kaleo is a linear recessed angular profile in opaline polycarbonate. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The version with integrated IR proximity switch allows lighting and temperature variation. On request, the length can be customized up to a maximum of 3 m.

H [cm]		Natural 4000K	EDC 4000K
		400 lx	425 lx
30		275 lx	290 lx
50			
100		95 lx	100 lx

863 mm  
428 lm  
40 lm/W  
CRI>80





# Kaleo



## KALEO EDC 12 V DC



24 V ON REQUEST

	25100030100ADD	4,2 W	372 mm	3000-4000K
	25100320100ADD	4,9 W	413 mm	3000-4000K
	25100040100ADD	5,9 W	500 mm	3000-4000K
	25100330100ADD	6,8 W	563 mm	3000-4000K
	25100050100ADD	9,1 W	760 mm	3000-4000K
	25100340100ADD	10,7 W	863 mm	3000-4000K
	25100060100ADD	12,4 W	1000 mm	3000-4000K
	25100350100ADD	14,6 W	1163 mm	3000-4000K

## KALEO 12 V DC

24 V ON REQUEST

	25100030100AN_	3,5 W	372 mm	_N \ _W
	25100320100AN_	4 W	413 mm	_N \ _W
	25100040100AN_	4,9 W	500 mm	_N \ _W
	25100330100AN_	5,6 W	563 mm	_N \ _W
	25100050100AN_	7,9 W	760 mm	_N \ _W
	25100340100AN_	9 W	863 mm	_N \ _W
	25100060100AN_	10,6 W	1000 mm	_N \ _W
	25100350100AN_	12,3 W	1163 mm	_N \ _W

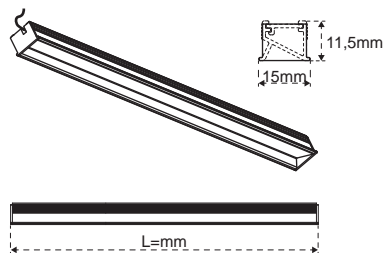

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM

For the choice of control system go to page 268.





### MEC DRIVER

For the selection of the power supply system go to page 262.





Custom: 200 mm ~ 3000 mm

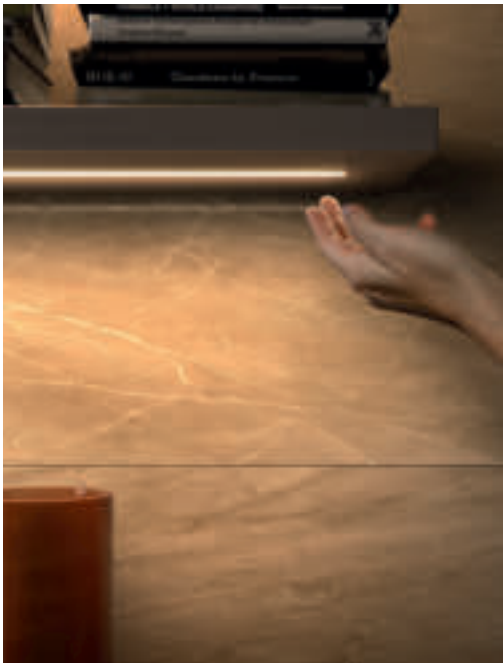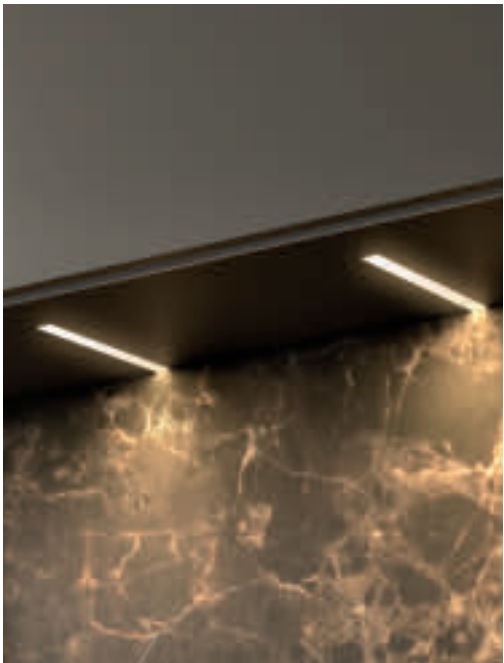

# Malindi2

## Recessed under cabinet \ inside cabinet

Malindi2 is a recessed linear profile in opaline polycarbonate with a thin protruding flange. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort. The version with integrated IR proximity switch allows lighting and temperature variation. On request, the length can be customized up to a maximum of 3 m. The clips for recessed installation are included in the package.

H [cm]	100°	Natural 4000K	EDC 4000K
30		825 lx	900 lx
50		390 lx	425 lx
100		125 lx	135 lx



760 mm  
364 lm  
40 lm/W  
CRI>80




Dual Blue and Dual UV-A  
On request



# Malindi2

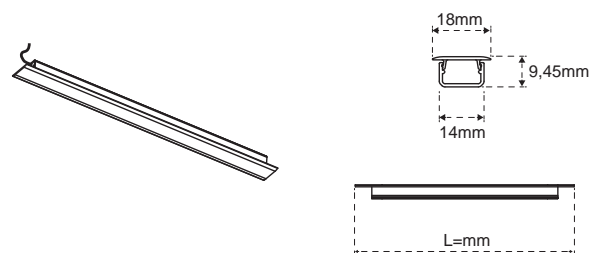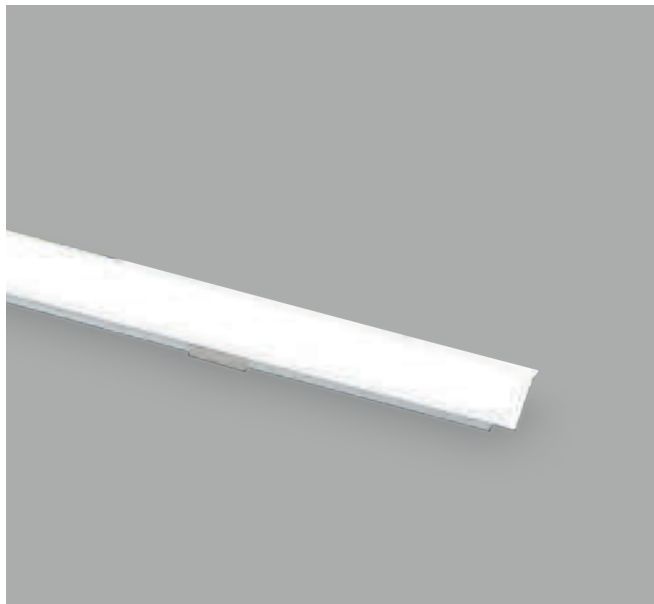

Dimensione Fresata /  
Drill Dimension /  
Ausmaß der fräsarbeit /  
Medida del corte /  
Mesures fraise  
L= L. lamp - 14mm



## MALINDI2 EDC 12 V DC

24 V ON REQUEST

	27000010100AGD	4,2 W	372 mm	3000-4000K
	27000020100AGD	5,9 W	500 mm	3000-4000K
	27000030100AGD	9,1 W	760 mm	3000-4000K
	27000040100AGD	12,4 W	1000 mm	3000-4000K

## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

## MALINDI2 12 V DC

24 V ON REQUEST

	27000010100C_	3,9 W	372 mm	_N \ _W
	27000020100C_	5,2 W	500 mm	_N \ _W
	27000030100C_	8,4 W	760 mm	_N \ _W
	27000040100C_	11,1 W	1000 mm	_N \ _W

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM

For the choice of control system go to page 268.




### MEC DRIVER

For the selection of the power supply system go to page 262.




# Malindi2 IRS

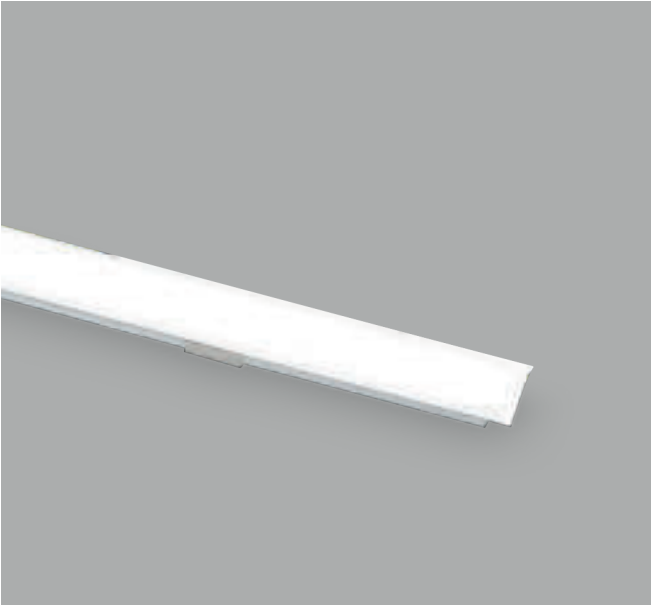

MALINDI2 IRS EDC 12 V DC			24 V ON REQUEST		
	27000120100AGD	3,6 W	372 mm	3000-4000K	
	27000130100AGD	5,2 W	500 mm	3000-4000K	
	27000140100AGD	8,8 W	760 mm	3000-4000K	
	27000150100AGD	11,7 W	1000 mm	3000-4000K	

MALINDI2 IRS 12 V DC			24 V ON REQUEST		
	27000120100C_	3,2 W	372 mm	_N \ _W	
	27000130100C_	4,9 W	500 mm	_N \ _W	
	27000140100C_	7,8 W	760 mm	_N \ _W	
	27000150100C_	10,7 W	1000 mm	_N \ _W	

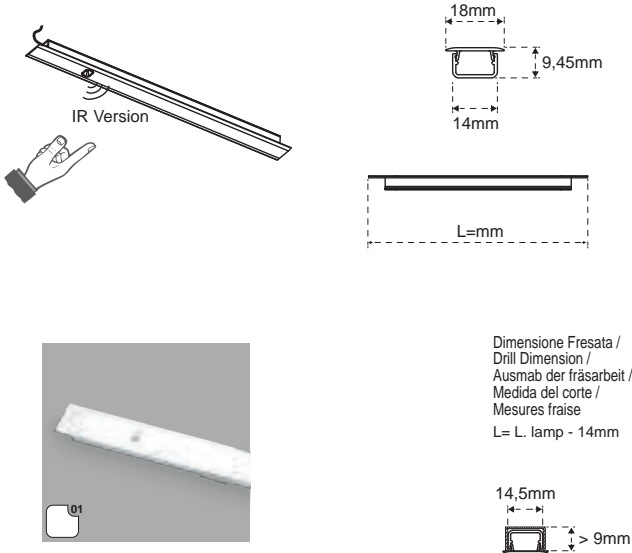

## ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for switching on and off, hold position for 5 seconds for colour adjustment.



**EMOTION DUAL COLOUR**  
Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**MEC DRIVER**  
For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



**IRS SENSOR**  
Fast movement for switching on and off.



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262.










# Oslo2

## Lighting handle

Oslo2 is a under the wall unit lamp in anodised aluminium to be integrated into the structure by fixing it to the side panels. Equipped with IR sensor Proximity switch to manage the ignition of the lamp, it offers a homogeneous emission on the work surface thanks to the LED source, available with Natural (4000K) or Warm (3000K) colour temperature. On request, the length can be customized up to a maximum of 3 m.

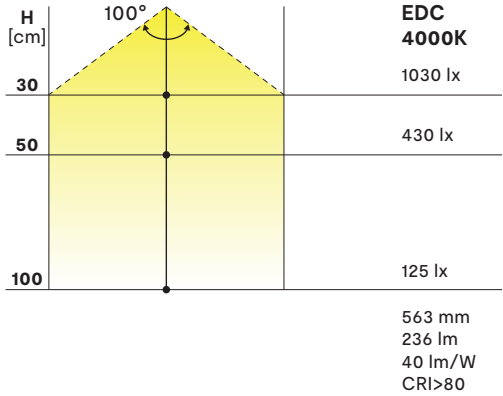











## Oslo2




### OSL02 IRS EDC 12 V

 <sup>12</sup>	29600081200AGD	3,9 W	413 mm	3000-4000K
 <sup>12</sup>	29600101200AGD	5,9 W	563 mm	3000-4000K
 <sup>12</sup>	29600121200AGD	9,8 W	863 mm	3000-4000K
 <sup>12</sup>	29600151200AGD	13,7 W	1163 mm	3000-4000K

### OSL02 IRS EDC 24 V

 <sup>12</sup>	29600081200AHD	3,9 W	413 mm	3000-4000K
 <sup>12</sup>	29600101200AHD	5,9 W	563 mm	3000-4000K
 <sup>12</sup>	29600121200AHD	9,8 W	863 mm	3000-4000K
 <sup>12</sup>	29600151200AHD	13,7 W	1163 mm	3000-4000K

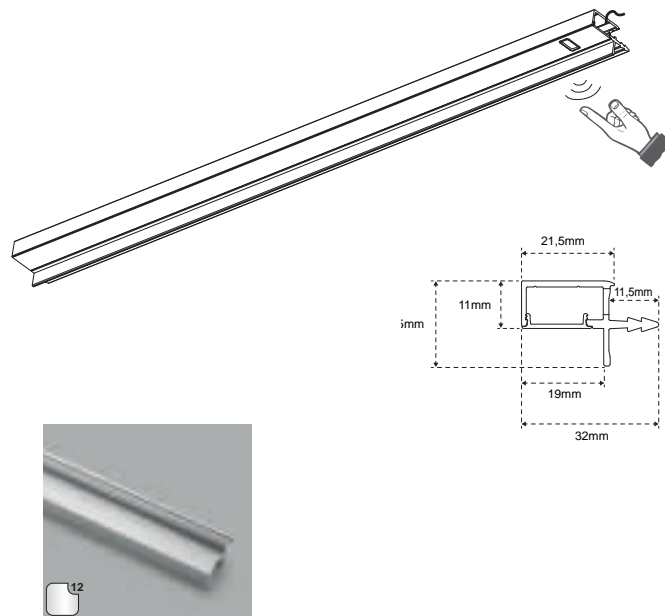

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262.

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### MEC DRIVER

For the selection of the power supply system go to page 262.






# Paris


## Cabinet bottom

Paris is a luminous background with anodized aluminium frame and base in tempered diffusing glass that offers a homogeneous emission upwards and downwards. The LED source is available with Natural (4000K), or Warm (3000K) colour temperature, the version with integrated IR proximity switch allows the lamp to be switched on. On request, the length can be customized up to a maximum of 3 m.

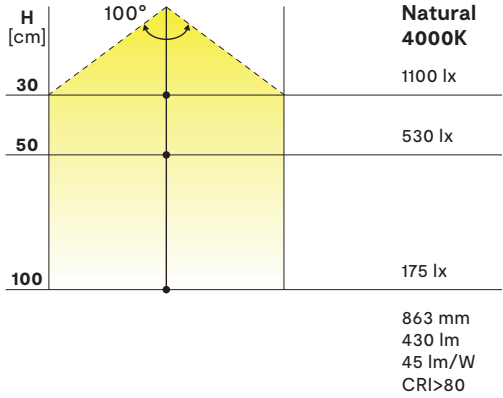





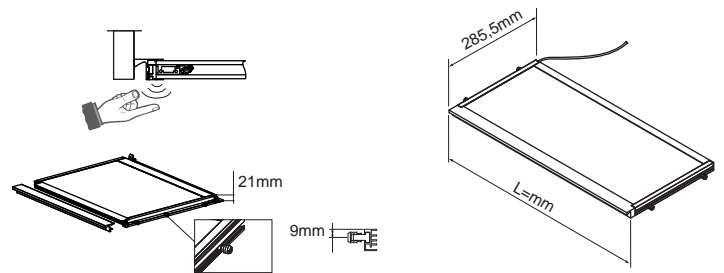





## Paris



### PARIS IRS EDC 12 V

24 V ON REQUEST

	21200370300AGD	4,6 W	413 mm	3000-4000K
	21200371200AGD			
	21200380300AGD	6,5 W	563 mm	3000-4000K
	21200381200AGD			
	21200390300AGD	10,4 W	863 mm	3000-4000K
	21200391200AGD			
	21200400300AGD	14,3 W	1163 mm	3000-4000K
	21200401200AGD			

### ACCESSORIES AND CONTROL



#### IRS SENSOR

Fast movement for on and off, hold position for 5 seconds for colour adjustment.



#### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).







#### MEC DRIVER

For the selection of the power supply system go to page 262.

### PARIS IRS 12 V

24 V ON REQUEST

	21200371200C_	4,3 W	413 mm	_N \ _W
	21200381200C_	5,9 W	563 mm	_N \ _W
	21200391200C_	9,5 W	863 mm	_N \ _W
	21200401200C_	13,1 W	1163 mm	_N \ _W

### ACCESSORIES AND CONTROL




#### IRS SENSOR

Fast movement for switching on and off.



#### FIXED COLOUR TEMPERATURE


Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER

For the selection of the power supply system go to page 262.




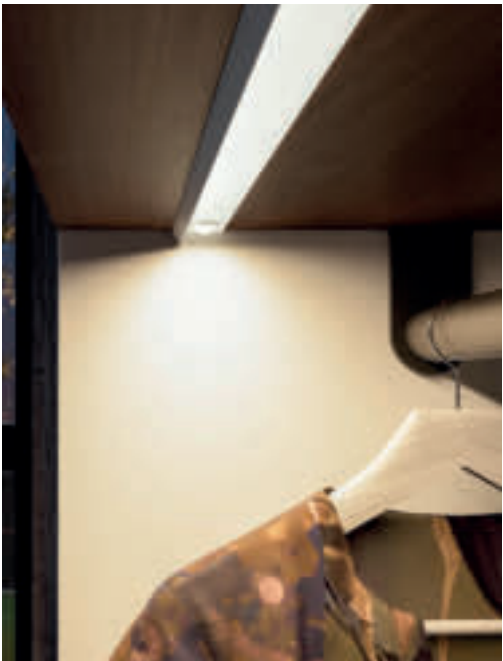

# Miska



## Inside cabinet



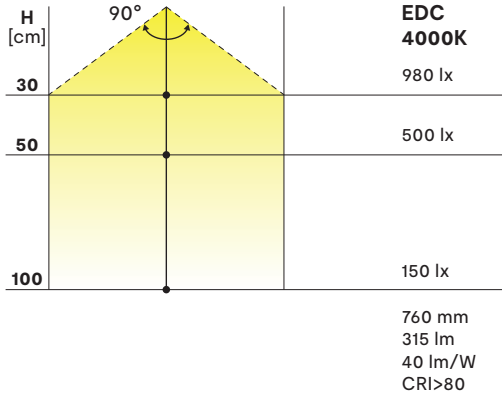

Miska, recessed linear profile with integrated PIR motion sensor for on/off function. The LED source is available with Natural (4000K) and Warm (3000K). On request, the length can be customized up to a maximum of 3 m. The clips for milling installation are included in the package.



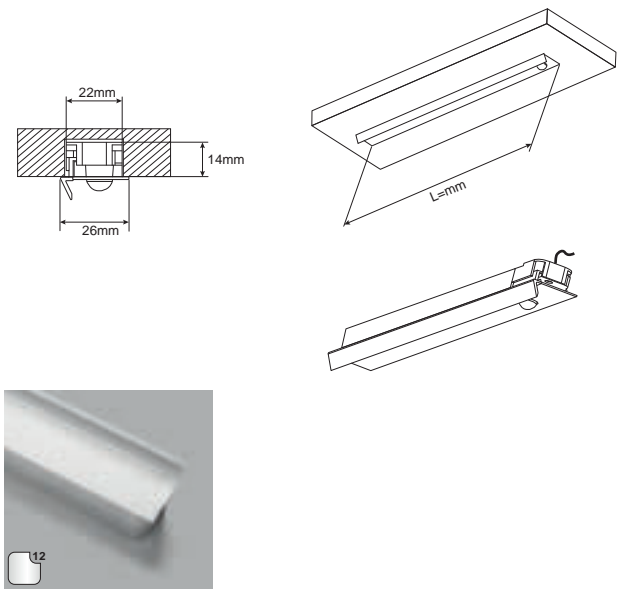

Miska



MISKA PIR DX 12 V DC		24 V ON REQUEST		
 <sup>12</sup>	22000011000CN	3,3 W	372 mm	4000K
 <sup>12</sup>	22000021000CN	4,9 W	500 mm	4000K
 <sup>12</sup>	22000031000CN	7,8 W	760 mm	4000K
 <sup>12</sup>	22000041000CN	10,7 W	1000 mm	4000K

ACCESSORIES AND CONTROL



**PIR SENSOR**  
The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.



**FIXED COLOUR TEMPERATURE**  
Natural white (4000K)



**MEC DRIVER**  
For the selection of the power supply system go to page 262 152.





Custom: 120 mm ~ 1400 mm



# Kiton

## Drawer / inside cabinet

Kiton is a linear aluminium profile with light emission directed both inwards and outwards. Surface mountable with clips (included), it is used to light the inside of the pot-and-pan drawers: the version with integrated IR sensor allows it to be switched on and off when the door is opened and closed. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K.




H [cm]		Natural 4000K	EDC 4000K
30		900 lx	980 lx
50		400 lx	430 lx
100		125 lx	135 lx
		861 mm 410 lm 45 lm/W CRI>80	861 mm 468 lm 45 lm/W CRI>80




Dual Blue  
On request



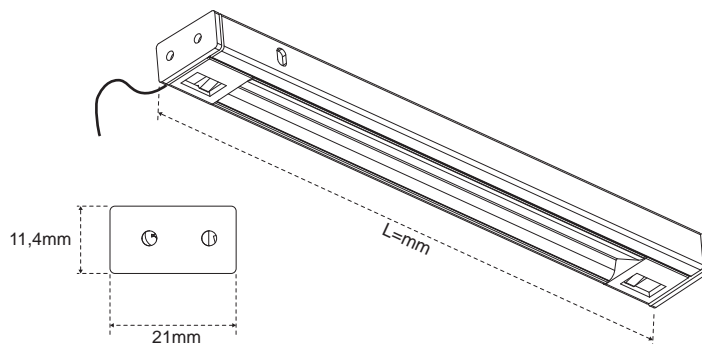



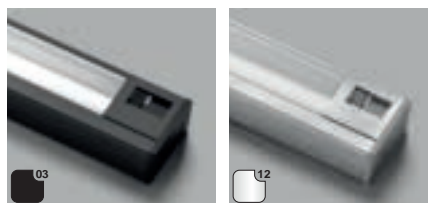









Per fianchi da 15, 16, 18, 19mm / For 15, 16, 18, 19mm board thickness  
Fuer Seitenstaerke 15 16 18 und 19 mm / Pour côtés de 15,16,18,19mm















## KITON IRD EDC 12 V DC

24 V ON REQUEST

	26800010301ADD	4,6 W	411 mm *	3000-4000K
	26800011201ADD			
	26800020301ADD	5,2 W	461 mm *	3000-4000K
	26800021201ADD			
	26800030301ADD	6,5 W	561 mm *	3000-4000K
	26800031201ADD			
	26800040301ADD	9,1 W	761 mm **	3000-4000K
	26800041201ADD			
	26800050301ADD	10,4 W	861 mm **	3000-4000K
	26800051201ADD			
	26800060301ADD	14,3 W	1161 mm **	3000-4000K
	26800061201ADD			

## KITON IRD 12 V DC

24 V ON REQUEST

	26800010301AN_	3,9 W	411 mm *	_N \ _W
	26800011201AN_			
	26800020301AN_	4,4 W	461 mm *	_N \ _W
	26800021201AN_			
	26800030301AN_	5,5 W	561 mm *	_N \ _W
	26800031201AN_			
	26800040301AN_	7,7 W	761 mm **	_N \ _W
	26800041201AN_			
	26800050301AN_	8,8 W	861 mm **	_N \ _W
	26800051201AN_			
	26800060301AN_	12,1 W	1161 mm **	_N \ _W
	26800061201AN_			

## ACCESSORIES AND CONTROL



### IRD SENSOR

Switch on when opening the door, switch off when closing. Open the drawer for colour adjustment three times in succession.



### EMOTION DUAL COLOUR

Colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### MEC DRIVER

For the selection of the power supply system go to page 262.

\* 1 IRD sensor  
\*\* 2 IRD sensor

## ACCESSORIES AND CONTROL



### IRD SENSOR

Switch on when opening the door, switch off when closing. Open the drawer for colour adjustment three times in succession.



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




### MEC DRIVER

For the selection of the power supply system go to page 262.

\* 1 IRD sensor  
\*\* 2 IRD sensor




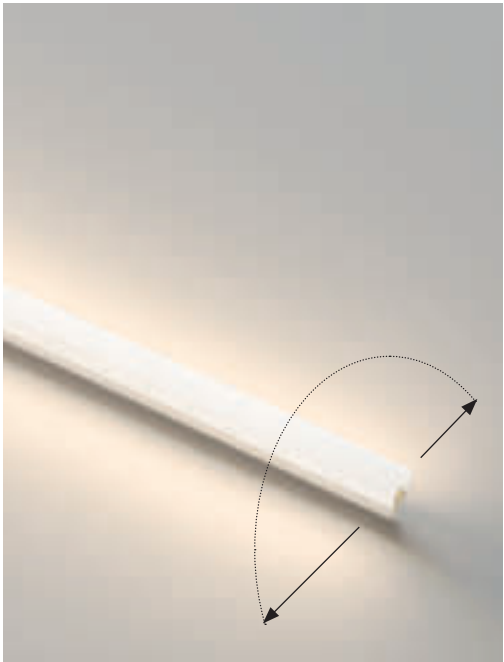

# Sirenuse

## Shelf lighting

Linear aluminium and polycarbonate suitable for wood clip-inside mounting. Its particular shape permit a 180 degrees light distribution front and up/down at the same time with a optimal vision comfort.

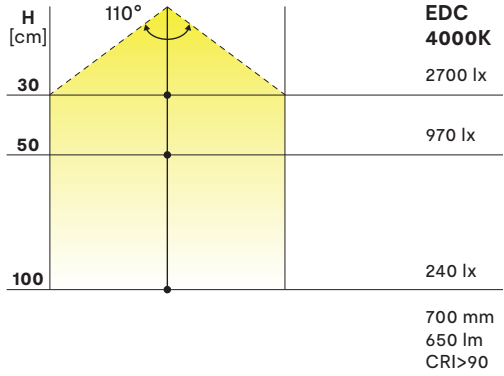



# Sirenuse



## SIRENUSE EDC 12 V DC



24 V ON REQUEST

	90500071200AGD	5,2 W	413 mm	3000-4000K
	90500081200AGD	7,2 W	563 mm	3000-4000K
	90500091200AGD	11,1 W	863 mm	3000-4000K
	90500101200AGD	15 W	1163 mm	3000-4000K

## SIRENUSE 12 V DC

24 V ON REQUEST

	90500071200C_	4,6 W	413 mm	_N \ _W
	90500081200C_	6,2 W	563 mm	_N \ _W
	90500091200C_	9,8 W	863 mm	_N \ _W
	90500101200C_	13,3 W	1163 mm	_N \ _W



## ACCESSORIES AND CONTROL



### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



### SMART SYSTEM

For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.

## ACCESSORIES AND CONTROL



### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



### SMART SYSTEM



For the choice of control system go to page 268.



### MEC DRIVER

For the selection of the power supply system go to page 262.



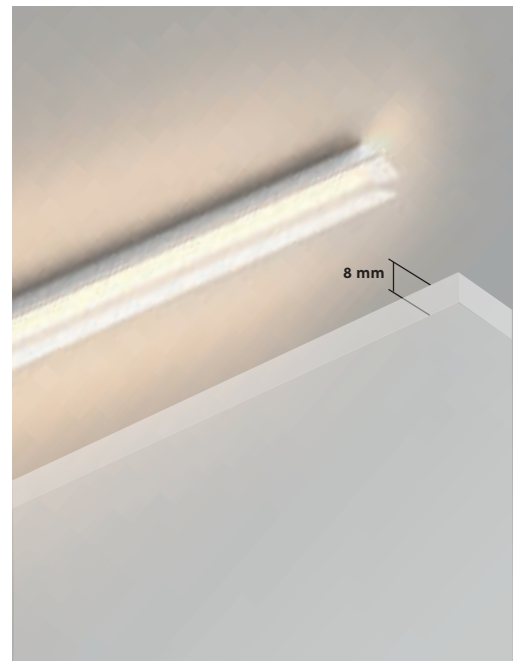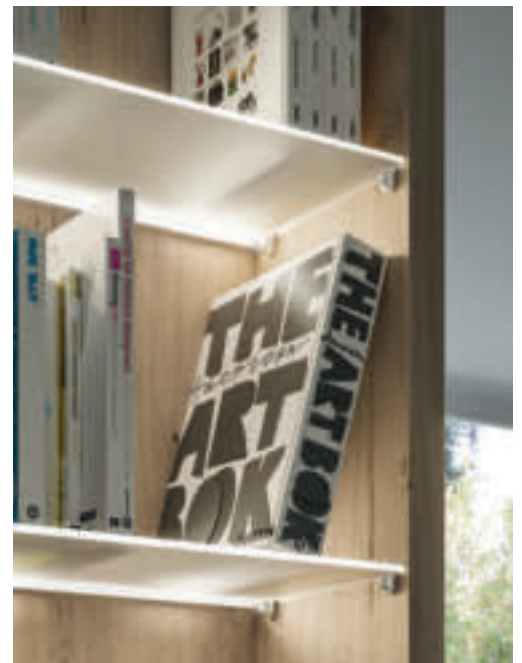



# Fly Light

## Glass shelf lighting

Fly Light is a linear aluminium profile that allows to house glass shelves (up to 8 mm thick) to be illuminated with a homogeneous effect. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K. On request, the length can be customized up to a maximum of 3 m.



## Fly Light

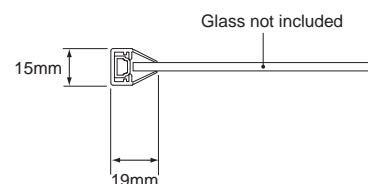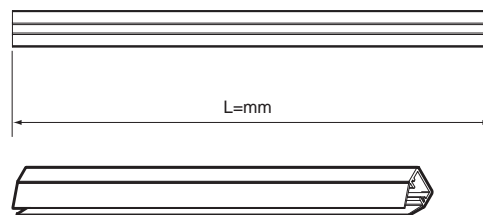

### FLY LIGHT EDC 12 V DC

	16900516500AGD	4,6 W	410 mm	3000-4000K
	16900526500AGD	6,5 W	560 mm	3000-4000K
	16900536500AGD	10,4 W	860 mm	3000-4000K
	16900546500AGD	14,3 W	1160 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### FLY LIGHT 12 V DC

	16900166500G_	2,6 W	413 mm	_N \ _W
	16900136500G_	3,9 W	563 mm	_N \ _W
	16900146500G_	6,2 W	863 mm	_N \ _W
	16900156500G_	8,5 W	1163 mm	_N \ _W

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM



For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262



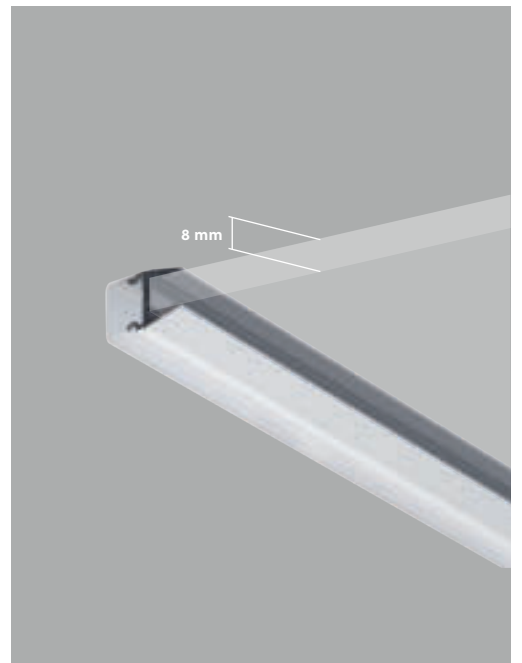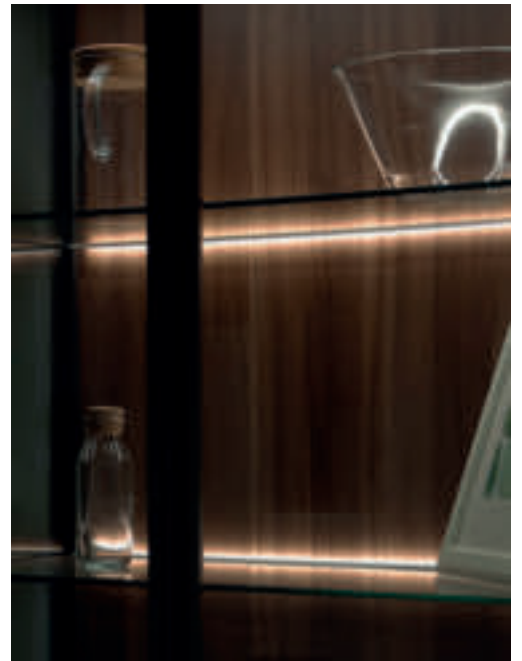

# Vivara

## Shelf lighting





Vivara is a linear lamp for glass. Suitable for glass fixing with thickness 8mm. 180 degrees light distribution front and up/down at the same time. Unit LED module giving possibility to customization.




Vivara



VIVARA EDC 24 V DC

	91500231200AED	5,2 W	410 mm	3000-4000K
	91500241200AED	7,2 W	560 mm	3000-4000K
	91500251200AED	11,1 W	860 mm	3000-4000K
	91500261200AED	15 W	1160 mm	3000-4000K

ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).




**SMART SYSTEM**  
For the choice of control system go to page 268.



**MEC DRIVER**  
For the selection of the power supply system go to page 262.



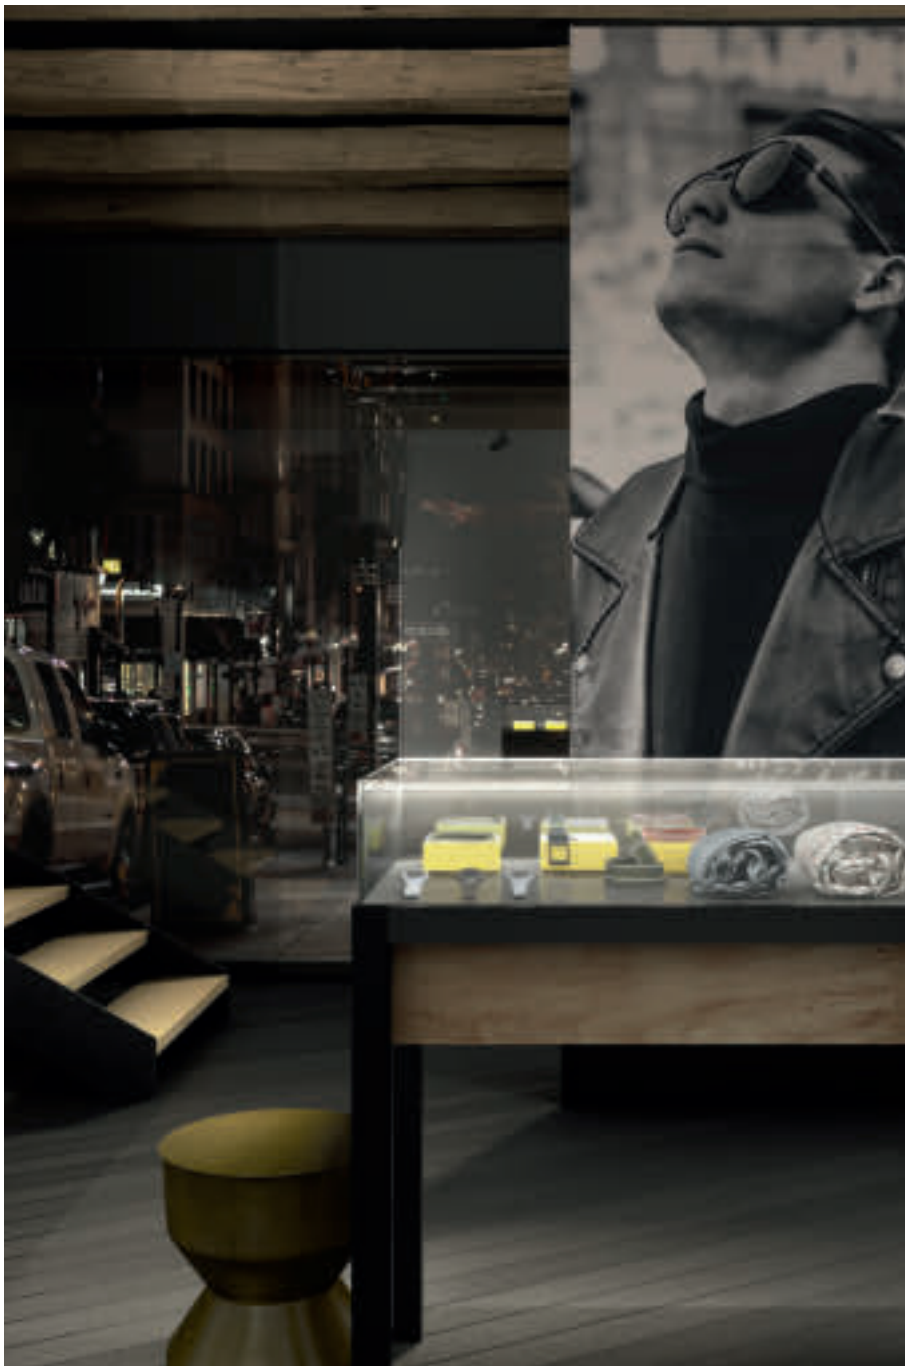


# Microline

## Surface mounted





Micro linear profile in discreet and versatile anodized aluminum. It is suitable for installation with double-sided adhesive tape (included) and it's suitable for glass cabinets' lighting in retail spaces. The LED source is available with Natural (4000K) colour temperature for optimal visual comfort.

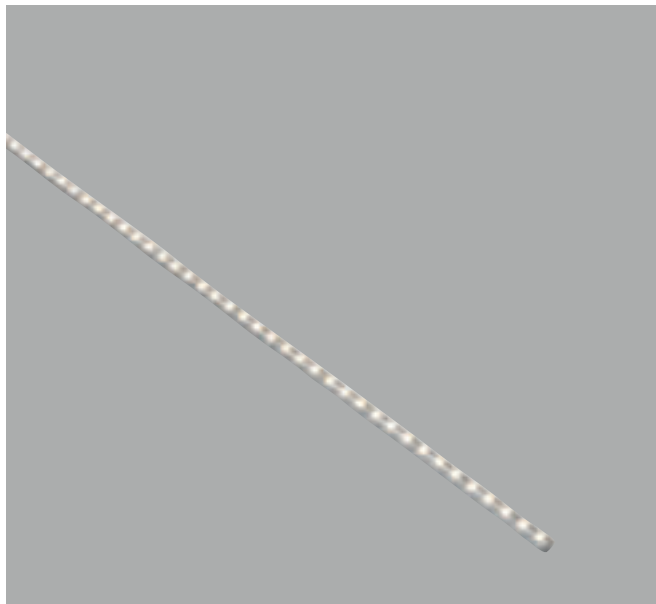





# Microline





## MICROLINE 12 V DC


	24100011200ZN	4,9 W	600 mm	1 input	4000K
	24100021200ZN	6,6 W	800 mm	1 input	4000K
	24100031200ZN	8,3 W	1000 mm	2 input	4000K
	24100041200ZN	10 W	1200 mm	2 input	4000K

## MICROLINE 45 12 V DC

	24100051200ZN	4,9 W	600 mm	1 input	4000K
	24100061200ZN	6,6 W	800 mm	1 input	4000K
	24100071200ZN	8,3 W	1000 mm	2 input	4000K
	24100081200ZN	10 W	1200 mm	2 input	4000K

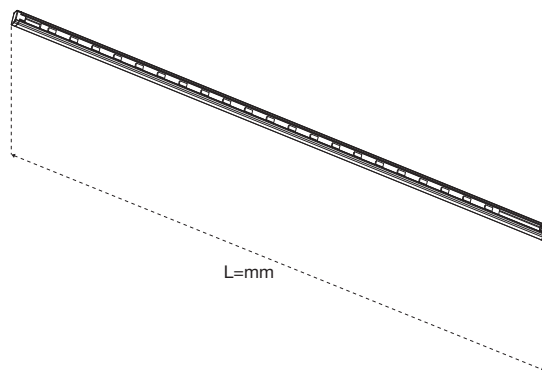

Microline




Microline 45

## ACCESSORIES AND CONTROL



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262

## ACCESSORIES AND CONTROL



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262





# Mini Tubular Q

## Surface mounted

Mini Tubular q is a modular linear profile: thanks to the use of its clips you can connect multiple lamps without interruption. Mini Tubular Q offers a 240° beam angle, and its little spaced LED microchip offers a powerful and continuous light source. The Emotion Dual Colour LED source allows the variation from 3000K to 4000K.





# Mini Tubular




## MINI TUBULAR Q 24 V DC

On request	3,4 W	253 mm	3000-4000K
On request	7,3 W	545 mm	3000-4000K
On request	11 W	837 mm	3000-4000K
On request	13,5 W	1087 mm	3000-4000K



## ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'cold' white (2700 \ 5000K).



**SMART SYSTEM**  
For the choice of control system go to page 268.



**MEC DRIVER**  
For the selection of the power supply system go to page 262.



## POWER CABLE


On request	100 mm
On request	2000 mm



## EXTENSION CORD

On request	25 mm
On request	300 mm
On request	1000 mm




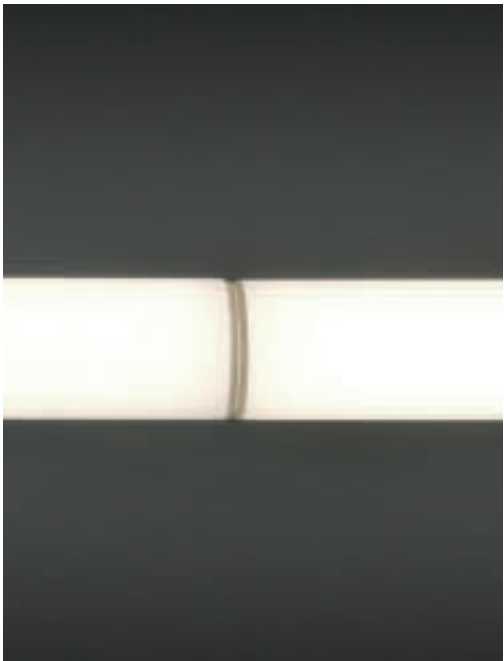

# Freedom Plus


## Surface mounted

Freedom Plus has been designed as a linear LED profile for indirect courtesy lighting as an alternative to obsolete fluorescent tubes. The opal diffuser offers a diffused radial emission and allows continuous row connection without interruptions in the light emission. The lamp can be fixed on the surface with the supplied system, and the integrated power supply simplifies the connection to the mains.

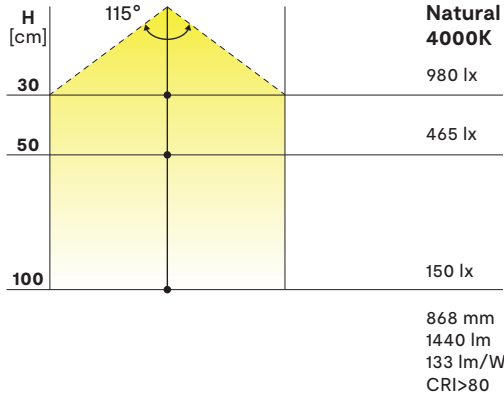



# Freedom Plus

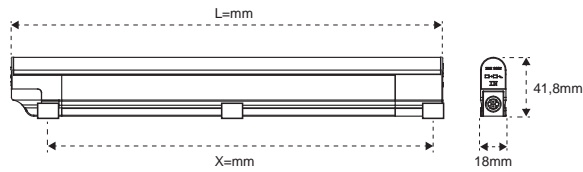

## FREEDOM PLUS


	2500410100Z_	3,8 W	307 mm	_C \ _N \ _W
	2500420100Z_	6,8 W	536 mm	_C \ _N \ _W
	2500430100Z_	7,2 W	568 mm	_C \ _N \ _W
	2500440100Z_	10,8 W	868 mm	_C \ _N \ _W
	2500450100Z_	14,5 W	1168 mm	_C \ _N \ _W
	2500460100Z_	18,0 W	1468 mm	_C \ _N \ _W

## ACCESSORIES AND CONTROL



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_C for cold white (6500K), \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



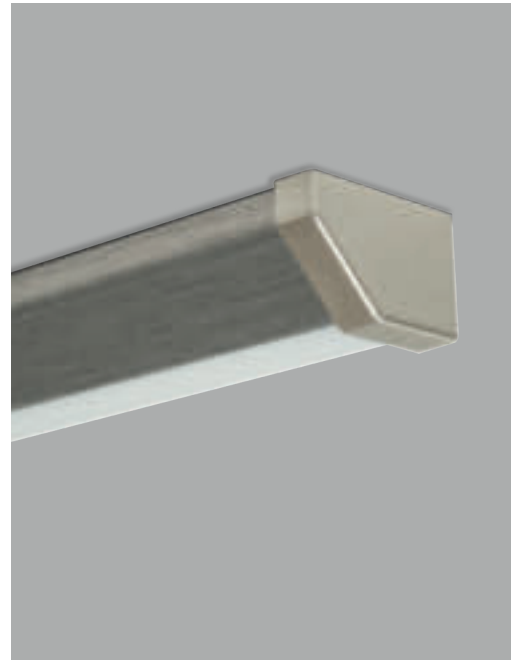





# Nubio

## Under top

Nubio is a modular aluminium profile designed for courtesy lighting of plinths and under-tops, compatible with Strip Reels. Small in size, it can be easily applied with double-sided adhesive tape (included): the corner profiles allow you to follow the perimeter of the kitchen, the length of the linear segments can be customized, on request, up to a maximum of 3 m.




Nubio



LINEAR PROFILE


 19700208500 3 m

Aluminium profile with opaline diffuser




INNER CORNER

 13201368500



OUTER CORNER

 13201358500



END CAPS

 12418688500 2 x

ELECTRIFICATION AND CONTROL



**LED STRIP**  
For the choice of the LED Strip go to page 246



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262



FOCUS ON

---

# Infinito: the evolution of integrated linear lighting

---

LUMINOUS PROFILE  
INTEGRATED FOR  
HANDLES AND GROOVES

Designed as a solution for handle-less groove furniture, Infinito integrates a soft light line into an anodised aluminium profile: the result is a decorative and functional effect with great impact.

It can be installed horizontally or vertically and can be developed on request according to the specific project.









# The Infinito system.

---

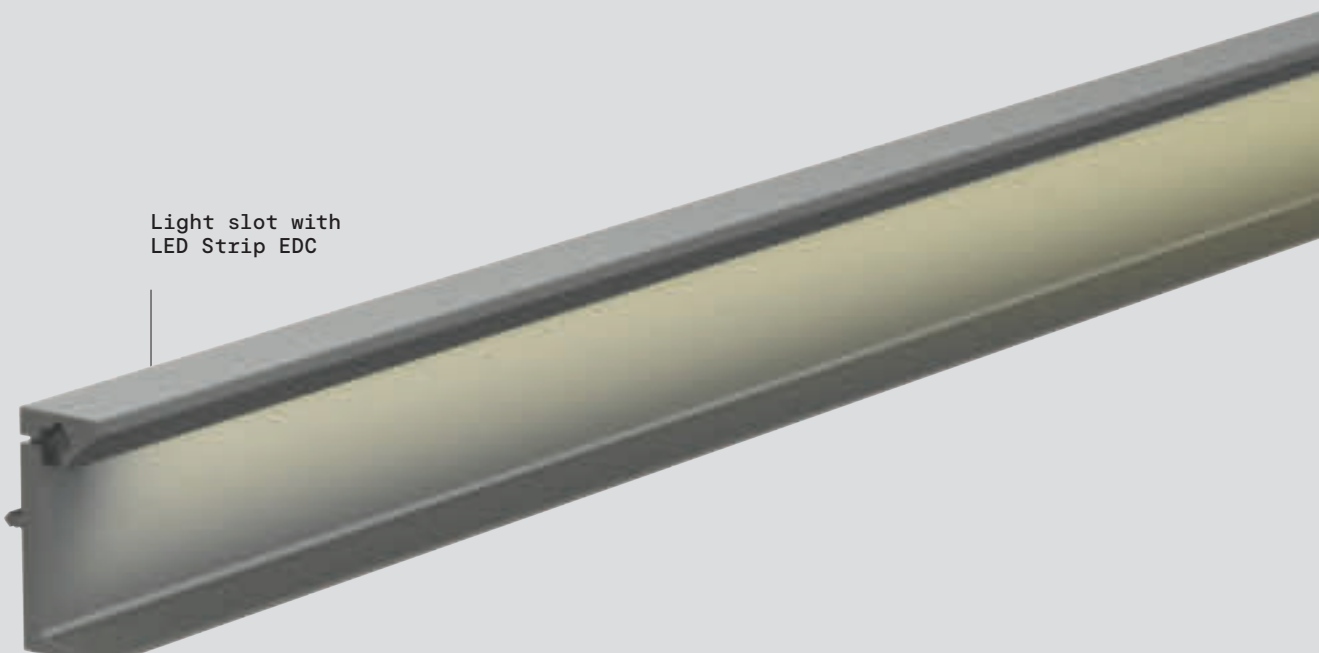

Light slot with  
LED Strip EDC



45° cut  
for angular  
application





Vertical application



Horizontal application











# Mec System.

---





MEC




106  
MEC 1



107  
MEC 2



108  
MEC 3



109  
MEC 4



110  
MEC 5



111  
MEC DRAWER

MICRO  
MEC



112  
MICRO MEC  
1



113  
MICRO MEC  
1 PLASTIC



114  
MICRO MEC  
2



115  
MICRO MEC  
3



116  
MICRO MEC  
3 PLASTIC



117  
MEC RACK

LED  
STRIP



118  
LED STRIP  
10 MM




119  
LED STRIP  
5 MM



FOCUS ON

# Meccano: do it yourself.

FLEXIBILITY,  
REDUCED  
DELIVERY TIMES,  
CUSTOMISATION  
OPTION

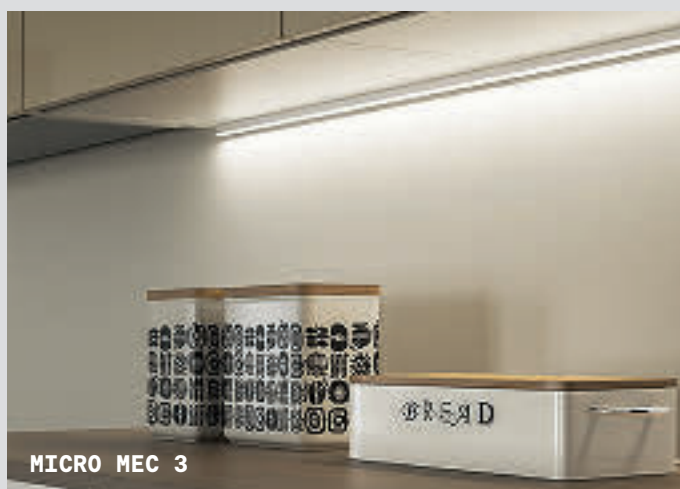




Meccano is the complete linear lighting programme that enables you to compose the most suitable lamp for your needs in total autonomy.

By combining the various profiles with compatible control screens and accessories, a fully customised and easily assembled luminaire can be created.

The dedicated connector allows the LED strips to be perfectly housed, which can be cut without the need for soldering, simplifying work and reducing material waste.



Anodised, natural or black painted aluminium profiles available for recessed or surface installation, with direct or inclined emission.



Transparent or opal polycarbonate diffuser.



Compatible 10 mm (Mec) and 5 mm (Micro Mec) LED strips, which can be sectioned off: the strips can be joined via a bridge connector.




Optional sensors can be integrated in the header: IR, touch and PIR for Mec and IR for Micro Mec versions



Plastic end caps with clips for locking the strip.



## Mec 1

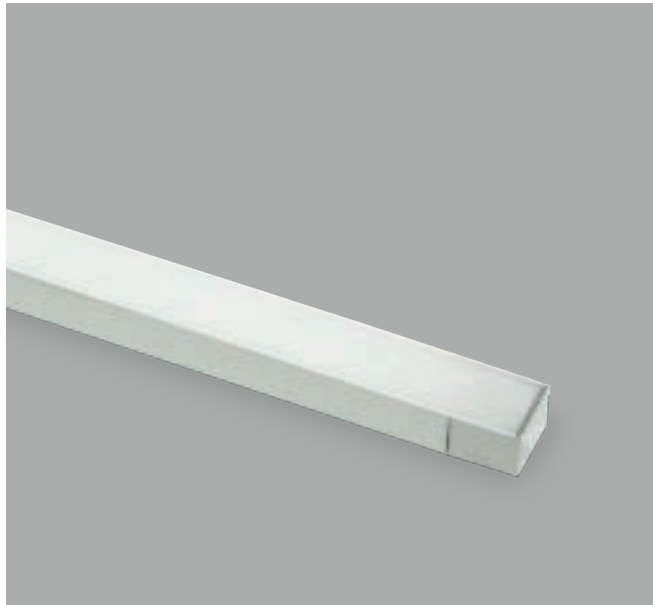


Anodised aluminium profile  
Surface installation  
Transparent or opal polycarbonate diffuser  
Symmetrical emission  
Anodised or black painted aluminium finish




### PROFILES

	19700280300	3 m
	19700281200	3 m



### DIFFUSERS

Opaline 19700120100	3 m
Transp. 19700120000	3 m



### END CAPS

	13201080300	2 x
	13201080000	2 x



### FIXING BRACKET

13201110000

### 12 - 24 V SENSORS



#### IRS SENSOR

Mono: 12807550001  
EDC: 12808870001



#### TOUCH SENSOR

12807510001



#### PIR SENSOR

12807530001

### ELECTRIFICATION AND CONTROL



#### STRIP REEL 10 mm

For the choice of Strip Reel go to page 118.



12 V




24 V

#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000

3 m - 24 V: 12603920000




#### MEC DRIVER


See page 262 for the choice of power supply system.



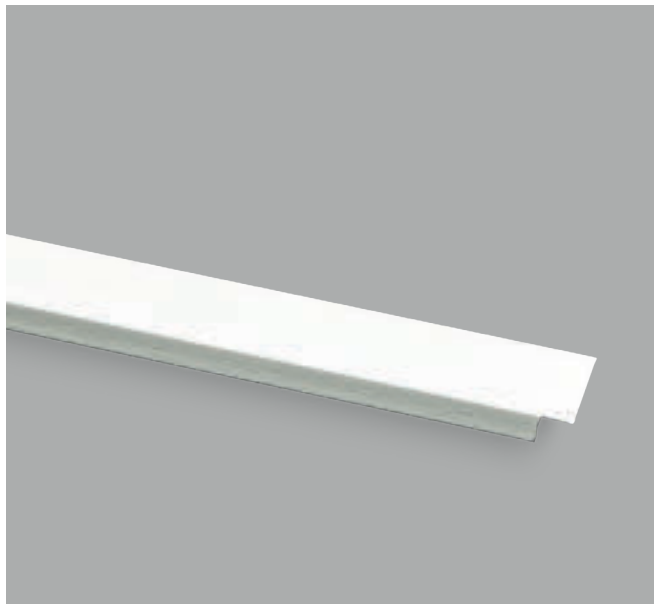

## Mec 2

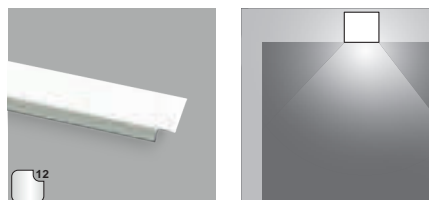


Anodised aluminium profile  
Recessed installation  
Transparent or opal polycarbonate diffuser  
Symmetrical emission  
Anodised aluminium finish





### PROFILES

	19700280300	3 m
	19700281200	3 m



### DIFFUSERS

Opaline 19700130100	3 m
Transp. 19700130000	3 m



### FIXING BRACKET

13201100000

### 12 - 24 V SENSORS



#### IRS SENSOR

Mono: 12807580001  
EDC: 12808880001



#### TOUCH SENSOR

12807510001



#### PIR SENSOR

12807570001

### ELECTRIFICATION AND CONTROL




#### STRIP REEL 10 mm

For the choice of Strip Reel go to page 118.



12 V




24 V

#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000  
3 m - 24 V: 12603920000



#### MEC DRIVER


See page 262 for the choice of power supply system.





## Mec 3




Anodised aluminium profile  
Surface installation  
Transparent or opal polycarbonate diffuser  
Inclined emission  
Anodised or black painted aluminium finish




### PROFILES

	19700290300	3 m
	19700291200	3 m






### DIFFUSERS

Opaline 19700120100	3 m
Transp. 19700120000	3 m



### END CAPS

	13201090300	2 x
	13201090000	2 x



### FIXING BRACKET

13201110000

### 12 - 24 V SENSORS



#### IRS SENSOR

Mono: 12807550001  
EDC: 12808870001



#### TOUCH SENSOR

12807510001



#### PIR SENSOR

12807530001

### ELECTRIFICATION AND CONTROL



#### STRIP REEL 10 mm


For the choice of Strip Reel go to page 118.



#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000  
3 m - 24 V: 12603920000




#### MEC DRIVER



See page 262 for the choice of power supply system.




## Mec 4





### PROFILES

	19800480300	3 m
	19800481200	3 m





### DIFFUSERS




Opaline 19700120100	3 m
Transp. 19700120000	3 m



### FIXING KIT

	13201280300
	13201280000

Anodised aluminium profile  
Recessed installation  
Transparent or opal polycarbonate diffuser  
Symmetrical emission  
Anodised aluminium finish



### 12 - 24 V SENSORS



#### IRS SENSOR

Mono: 12807550001  
EDC: 12808870001



#### TOUCH SENSOR

12807510001



#### PIR SENSOR

12807570001

### ELECTRIFICATION AND CONTROL



#### STRIP REEL 10 mm


For the choice of Strip Reel go to page 118.



#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000  
3 m - 24 V: 12603920000



#### MEC DRIVER

See page 262 for the choice of power supply system.





## Mec 5




Anodised aluminium profile  
Surface corner installation  
Transparent or opal polycarbonate diffuser  
Inclined emission  
Anodised or black painted aluminium finish




### PROFILES

	19800490300	3 m
	19800491200	3 m





### DIFFUSERS

Opaline 19700120100	3 m
Transp. 19700120000	3 m



### END CAPS

	13201290300	2 x
	13201290000	2 x

### 12 - 24 V SENSORS



#### IRS SENSOR

Mono: 12807550001  
EDC: 12808870001



#### TOUCH SENSOR

12807510001



#### PIR SENSOR

12807530001

### ELECTRIFICATION AND CONTROL



#### STRIP REEL 10 mm


For the choice of Strip Reel go to page 118.



#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12603960000  
3 m - 24 V: 12603920000




#### MEC DRIVER

See page 262 for the choice of power supply system.




# Mec Drawer

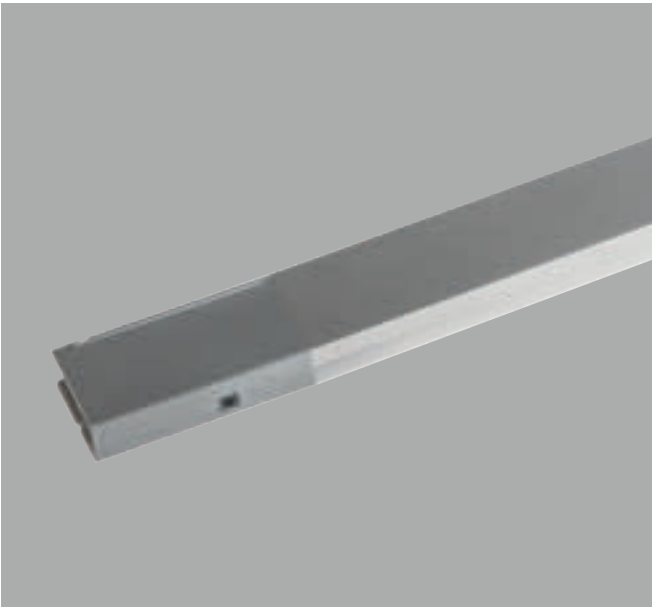


Anodised aluminium profile  
Surface installation  
Opal polycarbonate diffuser  
Inclined emission  
Anodised aluminium finish  
IR Door sensor





## PROFILES

	19801151200	3 m
---	-------------	-----




## DIFFUSERS

Opaline 19700980100	3 m
---------------------	-----



## END CAPS

	13201911000
---	-------------




IR Door sensor included.

## ELECTRIFICATION AND CONTROL



**STRIP REEL 10 mm**  
For the choice of Strip Reel go to page 118.




**MEC DRIVER**  
See page 262 for the choice of power supply system.



## FIXING KIT

13201920000
-------------





## Micro Mec 1





Anodised aluminium profile  
Surface installation  
Transparent or opal polycarbonate diffuser  
Symmetrical emission  
Anodised or black painted aluminium finish




&





### PROFILES

	19800890300	3 m
	19800891200	3 m





### DIFFUSERS

Opaline 19700760100	3 m
Transp. 19700760000	3 m



### END CAPS

	13201660300	2 x
	13201661000	2 x



### FIXING BRACKET

13201710000

### 12 - 24 V SENSORS



IRS SENSOR

24201140000

### ELECTRIFICATION AND CONTROL



STRIP REEL 5 mm

For the choice of Strip Reel go to page 119.




CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12606220000

3 m - 24 V: 12606230000



MEC DRIVER



See page 262 for the choice of power supply system.




## Micro Mec 1 Plastic





Aluminium reel plate  
Surface installation  
Opal polycarbonate diffuser  
Symmetrical emission  
The Mec Profi accessory, sold separately, allows you to create a backlight effect on shelves




### PROFILES

 **19800911200** 3 m



### DIFFUSERS

**Opaline 19700740100** 3 m









### END CAPS

**13201670100** 2 x

Plastic end caps and double-sided adhesive strips for surface application



### TWILIGHT PROFI

L: 3 m		<b>19800920300</b>
15 x 20 mm		<b>19800921200</b>
L: 3 m		<b>19800930300</b>
20 x 20 mm		<b>19800931200</b>
L: 3 m		<b>19800940300</b>
30 x 20 mm		<b>19800941200</b>

### 12 - 24 V SENSORS



**IRS SENSOR**

**24201150000**

### ELECTRIFICATION AND CONTROL



**STRIP REEL 5 mm**

For the choice of Strip Reel go to page 119.




**CONNECTION CORDS**

Connection from lamp to ballast, includes two springs to join the pieces without soldering.


3 m - 12 V: **12606220000**

3 m - 24 V: **12606230000**



**MEC DRIVER**

See page 262 for the choice of power supply system.

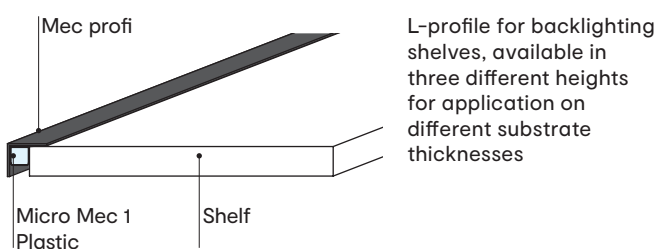


L-profile for backlighting shelves, available in three different heights for application on different substrate thicknesses



## Micro Mec 2



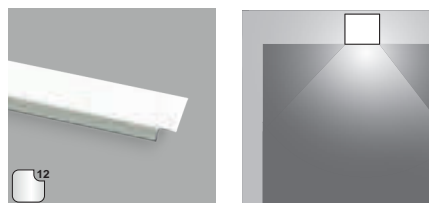

Anodised aluminium profile  
Recessed installation  
Transparent or opal polycarbonate diffuser  
Symmetrical emission  
Anodised aluminium finish




&




### PROFILES

	19800890300	3 m
	19800891200	3 m



### DIFFUSERS

Opaline 19700770100	3 m
Transp. 19700770000	3 m



### FIXING BRACKET

13201681000

### 12 - 24 V SENSORS



IRS SENSOR

24201130000

### ELECTRIFICATION AND CONTROL




STRIP REEL 5 mm

For the choice of Strip Reel go to page 119.



12 V




24 V

### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12606220000

3 m - 24 V: 12606230000



MEC DRIVER

See page 262 for the choice of power supply system.



## Micro Mec 3





Anodised aluminium profile  
Surface installation  
Transparent or opal polycarbonate diffuser  
Inclined emission  
Anodised or black painted aluminium finish




&




### PROFILES

 03	19700900300	3 m
 12	19700901200	3 m





### DIFFUSERS

Opaline 19700760100	3 m
Transp. 19700760000	3 m



### END CAPS

 03	13201690300	2 x
 12	13201691000	2 x



### FIXING BRACKET

13201710000

### 12 - 24 V SENSORS



IRS SENSOR

24201140000

### ELECTRIFICATION AND CONTROL



STRIP REEL 5 mm

For the choice of Strip Reel go to page 119.



12 V




24 V

### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12606220000

3 m - 24 V: 12606230000



MEC DRIVER


See page 262 for the choice of power supply system.




## Micro Mec 3 Plastic




Aluminium reel plate  
Surface installation  
Opal polycarbonate diffuser  
Symmetrical emission  
The Mec Profi accessory, sold separately, allows you to create a backlight effect on shelves




&




### PROFILES

 **19800911200** 3 m



### DIFFUSERS

**Opaline 19700750000** 3 m



### END CAPS

**13201700100** 2 x

Plastic end caps and double-sided adhesive strips for surface application

### 12 - 24 V SENSORS



**IRS SENSOR left**  
**24201160000**



**IRS SENSOR right**  
**24201160000**

### ELECTRIFICATION AND CONTROL



**STRIP REEL 5 mm**  
For the choice of Strip Reel go to page 119.



12 V




24 V

#### CONNECTION CORDS

Connection from lamp to ballast, includes two springs to join the pieces without soldering.

3 m - 12 V: 12606220000  
3 m - 24 V: 12606230000



#### MEC DRIVER

See page 262 for the choice of power supply system.



# Mec Rack



Anodised aluminium profile  
Installation inside surface cabinets  
Opal polycarbonate diffuser  
Symmetrical emission  
Anodised or black painted aluminium finish





Black




Aluminium




## PROFILES

	19801010300	3 m
	19801011200	3 m






## DIFFUSERS

Opaline 19700760100	3 m
---------------------	-----



## CENTRAL BRACKET

	13201780300
	13201786500




For profile lengths  
> 90 cm



## END CAPS


	13201750300	-
	13201756500	-
	13201760300	PIR left
	13201766500	PIR left
	13201770300	PIR right
	13201776500	PIR right



## ELECTRIFICATION AND CONTROL



**STRIP REEL 5 mm**  
For the choice of Strip Reel go to page 119.




**MEC DRIVER**  
See page 262 for the choice of power supply system.



## Strip reel 10 mm



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Cold (6500K), Natural (4000K), Warm (3000K, 2700K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

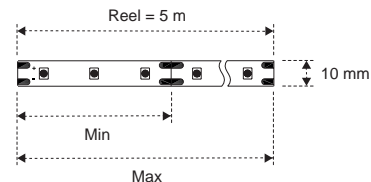

### STRIP REEL 12 V

	LEDs/m	W/m	L. Min \ Max	CCT
12807400001G_	72	7,8	42 mm \ 4,6 m	_C \ _N \ _W
12807410001C_	108	11,7	27,8 mm \ 3,1 m	_C \ _N \ _W
12807420001E_	156	16,9	19,2 mm \ 2,1 m	_C \ _N \ _W
12808490002AGD	120 + 120	13	25 mm \ 2,8 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.

L: 3 m  
12603960000



Extension from output cable to power supply 12 V

L: 1100 mm  
12604220000  
L: 2200 mm  
12604230000



Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)

L: 50 mm  
12605010000



Soft link lamp-to-lamp connection for both 12 V and 24 V.

L: 10 cm  
12603930000  
L: 40 cm  
12603940000  
L: 70 cm  
12603950000



Bridge connector for strip segments

19700450100



#### FIXED COLOUR TEMPERATURE

Add the suffix \_C for cold white (6500K), \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER

For the selection of the power supply system go to page 262

### STRIP REEL 24 V

	LEDs/m	W/m	L. Min \ Max	CCT
12808190001N_	72	7,8	84 mm \ 9,2 m	_C \ _N \ _W
12808180001M_	108	11,7	55,6 mm \ 6,2 m	_C \ _N \ _W
12807430001I_	156	16,9	38,4 mm \ 4,2 m	_C \ _N \ _W
12809490000NW	72	7,8	84 mm \ 9,2 m	2700K
12809690000MW	108	11,7	55,6 mm \ 6,2 m	2700K
12809700000IW	156	16,9	38,4 mm \ 4,2 m	2700K
12808860002AHD	120 + 120	13	50 mm \ 5,6 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.

L: 3 m  
12603920000



Extension from output cable to power supply 24 V

L: 1100 mm  
12604630000  
L: 2200 mm  
12604620000



Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version)

L: 50 mm  
12605020000



Soft link lamp-to-lamp connection for both 12 V and 24 V.

L: 10 cm  
12603930000  
L: 40 cm  
12603940000  
L: 70 cm  
12603950000



Bridge connector for strip segments

19700450100



#### FIXED COLOUR TEMPERATURE

Add the suffix \_C for cold white (6500K), \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




#### MEC DRIVER


For the selection of the power supply system go to page 262



## Strip reel 5 mm

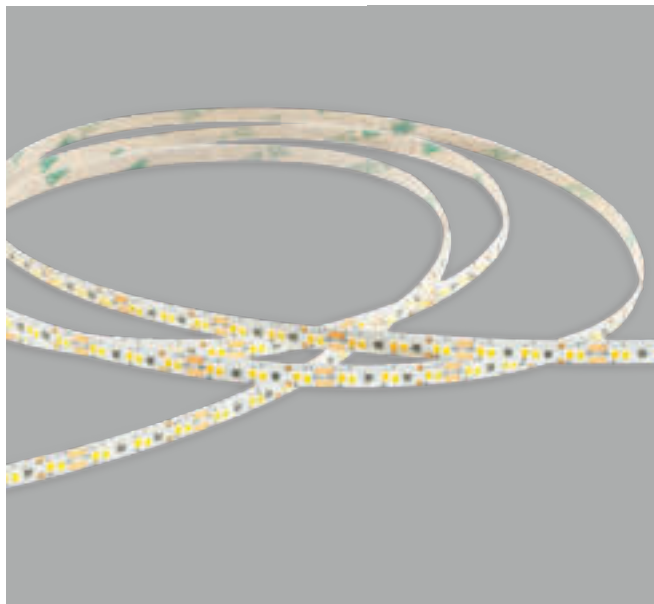

Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Micro Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Natural (4000K), Warm (3000K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

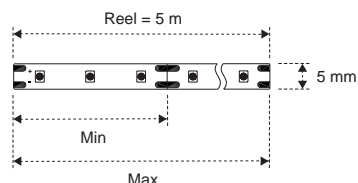

### STRIP REEL 12 V

	LEDs/m	W/m	L. Min \ Max	CCT
12810230000AN_	180	13	25 mm \ 2,8 m	_N \ _W
12809720000AUD	120 + 120	13	25 mm \ 2,8 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.  
L: 3 m  
**12606220000**



Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)  
L: 50 mm  
**12605010000**



Soft link lamp-to-lamp connection for both 12 V and 24 V.  
L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262

### STRIP REEL 24 V

	LEDs/m	W/m	L. Min \ Max	CCT
12810240000AM_	180	13	50 mm \ 5,6 m	_N \ _W
12809730000APD	120 + 120	13	50 mm \ 5,6 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.  
L: 3 m  
**12606230000**




Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version)  
L: 50 mm  
**12605020000**



Soft link lamp-to-lamp connection for both 12 V and 24 V.  
L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262



# Spot.





RECESSED  
SPOTLIGHTS  
—




122  
NUBE



128  
SUNRISE



132  
MOONLIGHT




136  
HAWAII


SURFACE  
MOUNTED  
SPOTLIGHTS  
—



138  
LUCKY 1



140  
LUCKY 2




142  
LUCKY 3



144  
LUCKY 4



146  
LUCKY 5



148  
BLUES

ORIENTABLE  
SPOTLIGHTS  
—



150  
LIGHT POINT



152  
FLEXSPOT



154  
LEGIS



156  
AREA LIGHT

PATH-  
MARKERS  
—



158  
PLINTHY

RECHARGE-  
ABLE SPOT-  
LIGHTS  
—



160  
SMART PIR \  
SMART MINI





# Nube

## Recessed / surface mounted spotlights



Nube is a recessed aluminium spotlight with opal polycarbonate diffuser. Offered in three different sizes and three finishes, it can be used as an under wall unit, where it can be installed flush or in support by means of the special spacer accessory (not included). The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K. The range is completed by the IP44 version and the 230 version in direct voltage.

H [cm]	65°	Nube35 4000K	Nube58 4000K	Nube68 4000K	Nube 230 4000K
30		500 lx	650 lx	800 lx	1300 lx
50		200 lx	275 lx	350 lx	440 lx
100		50 lx	75 lx	100 lx	105 lx
		90 lm 50 lm/W CRI>80	160 lm 64 lm/W CRI>80	195 lm 65 lm/W CRI>80	200 lm 77 lm/W CRI>80





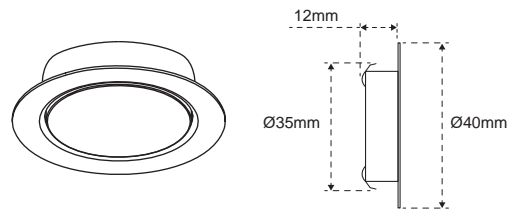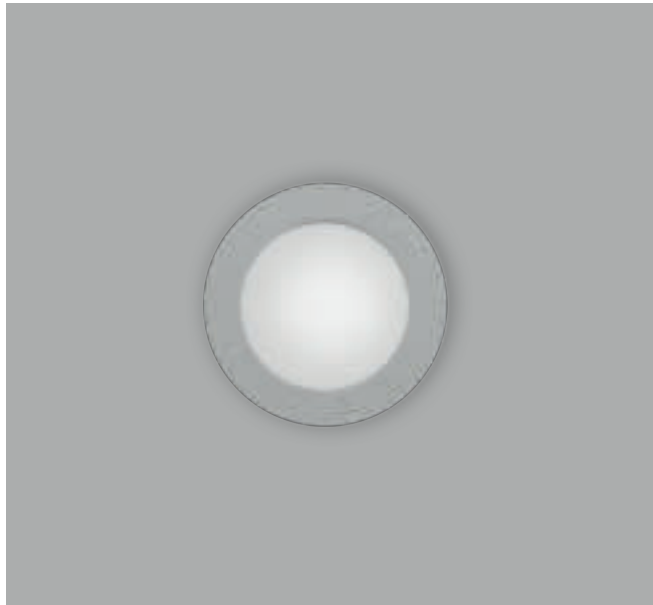


## Nube 35



SPOT

### NUBE 35 EDC 12 V DC

	23300050300ZD	1,8 W	Ø 35 mm	3000-4000K
	23300056500ZD			
	23300058500ZD			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM




For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### NUBE 35 12 V DC

	23300050300Z_	1,8 W	Ø 35 mm	_N \ _W
	23300056500Z_	1,8 W	Ø 35 mm	_N \ _W
	23300058500Z_	1,8 W	Ø 35 mm	_N \ _W

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM



For the choice of control system go to page 268






#### MEC DRIVER


For the selection of the power supply system go to page 262

### NUBE 35 KIT 3 SPOTS + SPACER + MEC DRIVER 18 W


	12423500300Z_	5,4 W	Ø 35 mm	_N \ _W
	12423506500Z_			

### SPACER

	23300080300	Ø 40 mm	h. 14 mm
	23300086500		
	23300088500		




SPACER

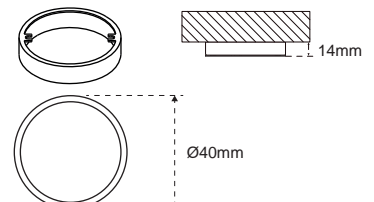



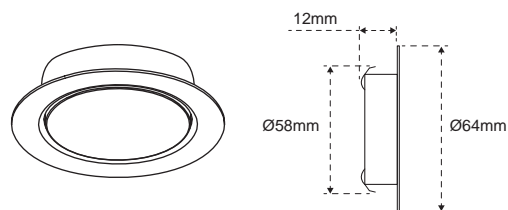


## Nube 58



### NUBE 58 EDC 12 V DC

	23300060300ZD	2,5 W	Ø 58 mm	3000-4000K
	23300066500ZD			
	23300068500ZD			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM




For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### NUBE 58 12 V DC

	23300060300Z_	2,5 W	Ø 58 mm	_N \ _W
	23300066500Z_			
	23300068500Z_			

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM



For the choice of control system go to page 268 272






#### MEC DRIVER


For the selection of the power supply system go to page 262 266

### NUBE 58 KIT 3 SPOTS + SPACER + MEC DRIVER 18 W

	12423510300Z_	7,5 W	Ø 58 mm	_N \ _W
	12423516500Z_			




### SPACER

	23300090300	Ø 64 mm	h. 14 mm
	23300096500		
	23300098500		

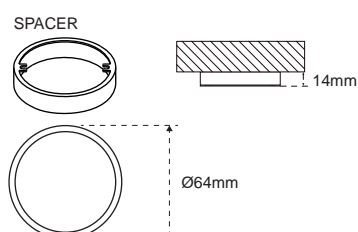



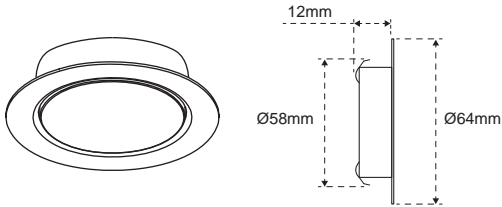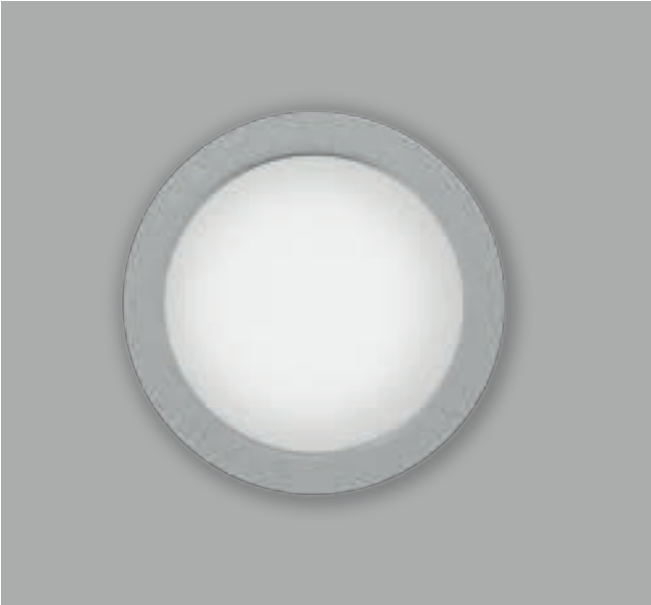


Nube 58 IP44



NUBE 58 IP44 EDC 12 V DC

	23300270300ZD	2,5 W	Ø 58 mm	3000-4000K
	23300276500ZD			

ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).




**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262


IP44 POWER SUPPLY

12590930000	Max 30 W	2,5 A
-------------	----------	-------

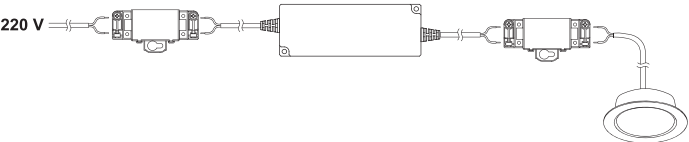



SPACER

	23300090300	Ø 64 mm	h. 14 mm
	23300096500		
	23300098500		





# Nube 230

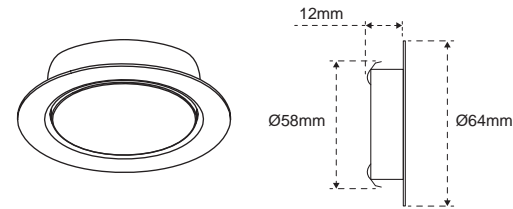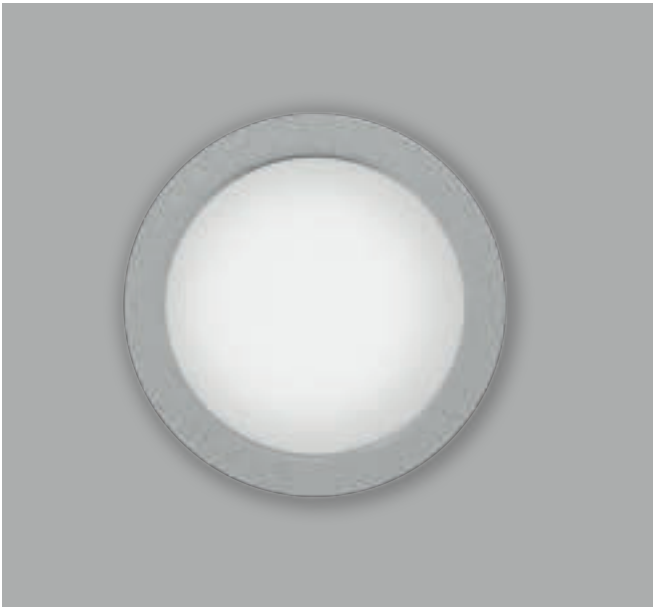

## NUBE 230 V AC

01	23300150100Z_	2,6 W	Ø 58 mm	_N \ _W
65	23300156500Z_			

## ACCESSORIES AND CONTROL




**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code

## DISTRIBUTOR


12605120100	Ø 40 mm	h. 14 mm
-------------	---------	----------

Distributore con spina per la connessione di fino a sei faretti.




## SPACER

03	23300090300	Ø 64 mm	h. 14 mm
65	23300096500		
85	23300098500		

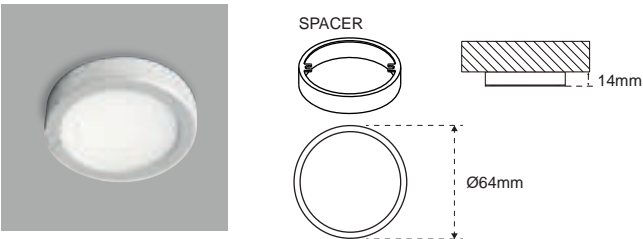



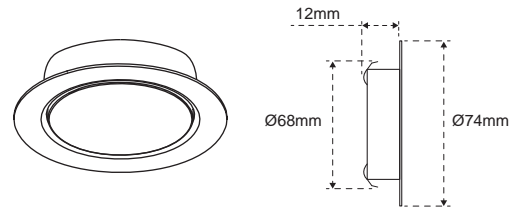


## Nube 68



SPOT

### NUBE 58 EDC 12 V DC

	23300070300ZD	3 W	Ø 68 mm	3000-4000K
	23300076500ZD			
	23300078500ZD			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM




For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### NUBE 68 12 V DC

	23300070300Z_	3 W	Ø 68 mm	_N
	23300076500Z_	3 W	Ø 68 mm	_N \ _W
	23300078500Z_	3 W	Ø 68 mm	_N \ _W

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM




For the choice of control system go to page 268




#### MEC DRIVER

For the selection of the power supply system go to page 262

### SPACER

	23300100300	Ø 74 mm	h. 14 mm
	23300106500		
	23300108500		

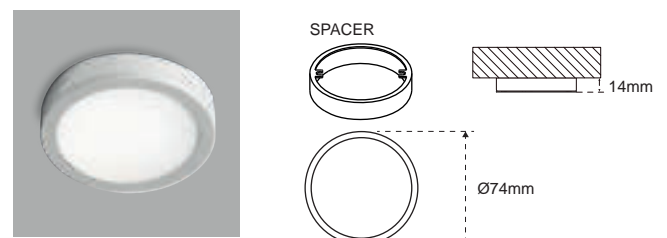





# Sunrise

## Recessed / surface mounted spotlights

Sunrise is a recessed aluminium spotlight with opal polycarbonate diffuser. Available in two sizes and three finishes, it can be used as an under wall unit, where it can be installed recessed or in support by means of the special spacer accessory (not included). The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K.



H [cm]	60°	Natural 4000K	EDC 4000K
30		1400 lx	1400 lx
50		470 lx	470 lx
100		130 lx	130 lx

332 lm  
84 lm/W  
CRI>80







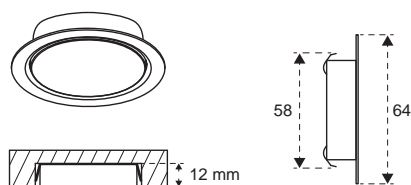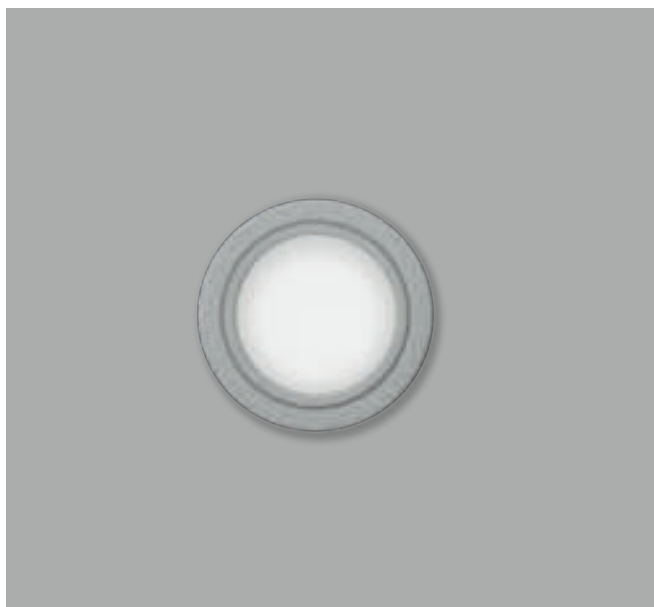



## Sunrise 58






### SUNRISE 58 EDC 12 V DC

	28100010300ZD	4 W	Ø 58 mm	3000-4000K
	28100016500ZD			
	28100019100ZD			
	28100010800ZD			




### SUNRISE 58 EDC 24 V DC

	28100040300ZD	4 W	Ø 58 mm	3000-4000K
	28100046500ZD			
	28100049100ZD			


### SUNRISE 58 12 V DC

	28100010300Z_	4 W	Ø 58 mm	_N \ _W
	28100016500Z_			
	28100019100Z_			

### SPACER

	23300090300	Ø 64 mm	h. 14 mm
	23300096500		
	23300099100		

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




#### SMART SYSTEM

For the choice of control system go to page 268





#### MEC DRIVER

For the selection of the power supply system go to page 262







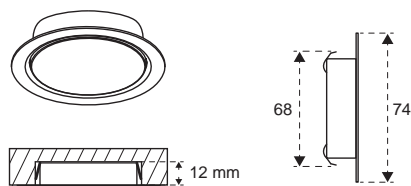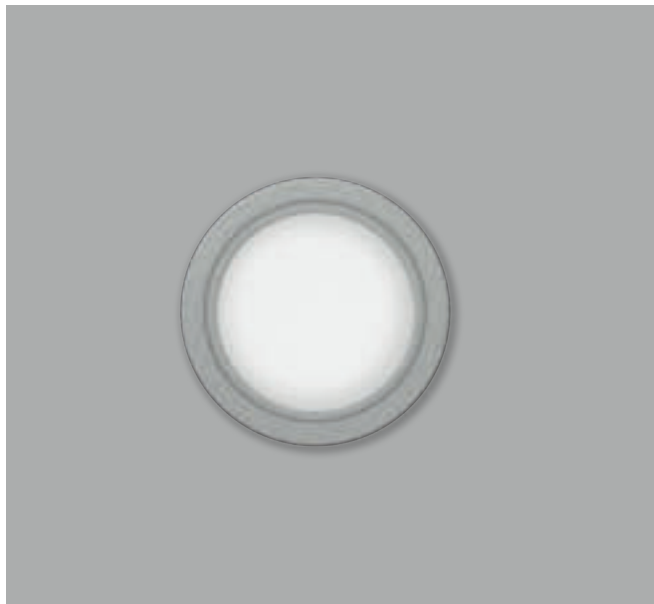

## Sunrise 68



### SUNRISE 68 EDC 12 V DC

	28100020300ZD	4 W	Ø 58 mm	3000-4000K
	28100026500ZD			
	28100029100ZD			
	28100020800ZD			

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM




For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### SUNRISE 58 12 V DC

	28100020300Z_	4 W	Ø 58 mm	_N \ _W
	28100026500Z_			
	28100029100Z_			

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### SMART SYSTEM




For the choice of control system go to page 268




#### MEC DRIVER

For the selection of the power supply system go to page 262

### SPACER


	28100030300	Ø 74 mm	h. 14 mm
	28100036500		
	28100039100		










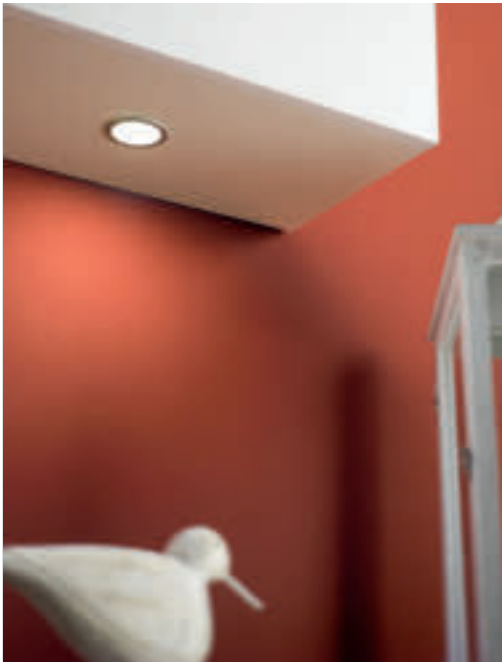

# Moonlight


## Recessed / surface mounted spotlights

Recessed plastic spotlight with opal polycarbonate diffuser. Available in various finishes, it can be used as an under-cabinet or inside-cabinet, where it can be installed recessed or surface-mounted by using the special spacer (not included). The LED source is available in Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K.

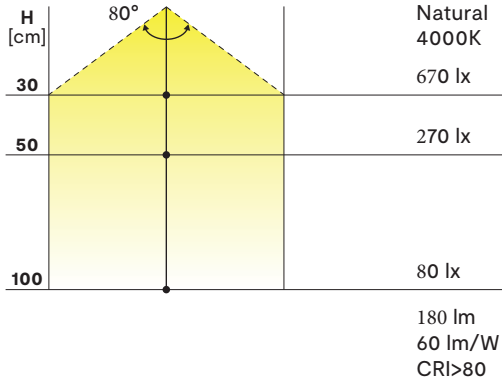



## Moonlight TT

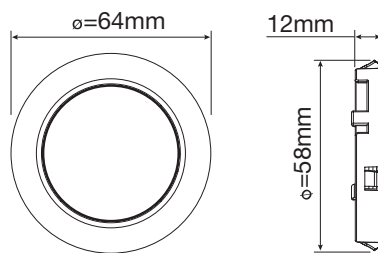

### MOONLIGHT TT EDC 12 V DC

01	21400850101ZD	3 W	Ø 58 mm	3000-4000K
65	21400856500ZD			
85	21400858500ZD			

### MOONLIGHT TT EDC 24 V DC

65	21400896500ZD	3 W	Ø 58 mm	3000-4000K
----	---------------	-----	---------	------------

### MOONLIGHT TT 12 V DC

01	21400010101	3 W	Ø 58 mm	3000K
65	21400016500			
85	21400018500			
01	21400020101	3 W	Ø 58 mm	4000K
65	21400026500			
85	21400028500			


### MOONLIGHT TT KIT 3 SPOTS + DRIVER 15 W

01	12418310100Z_	9 W	_N \ _W
65	12418316500Z_		
85	12418318500Z_		

### SPACER

01	21400040100	Ø 64 mm	h. 14 mm
65	21400046500		
85	21400048500		

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268 272



#### MEC DRIVER

For the selection of the power supply system go to page 262 266

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




#### SMART SYSTEM

For the choice of control system go to page 268 272




#### MEC DRIVER

For the selection of the power supply system go to page 262 266





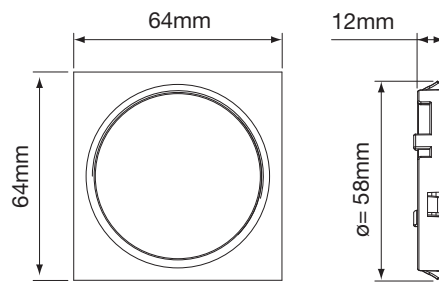


## Moonlight QT




### MOONLIGHT QT EDC 12 V DC

	21400740100ZD	3 W	Ø 58 mm	3000-4000K
	21400746500ZD			
	21400748500ZD			

### MOONLIGHT QT EDC 24 V DC

	21400906500ZD	3 W	Ø 58 mm	3000-4000K
--	---------------	-----	---------	------------

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM




For the choice of control system go to page 268 272






#### MEC DRIVER

For the selection of the power supply system go to page 262 266




### MOONLIGHT QT 12 V DC

	21400740100Z_	3 W	Ø 58 mm	_N \ _W
	21400746500Z_			
	21400748500Z_			


### MOONLIGHT QT KIT 3 SPOTS + DRIVER 15 W

	12418330100Z_	9 W	_N \ _W
	12418336500Z_		
	12418338500Z_		

### SPACER

	21400780100	Ø 64 mm	h. 14 mm
	21400786500		
	21400788500		


#### SPACER










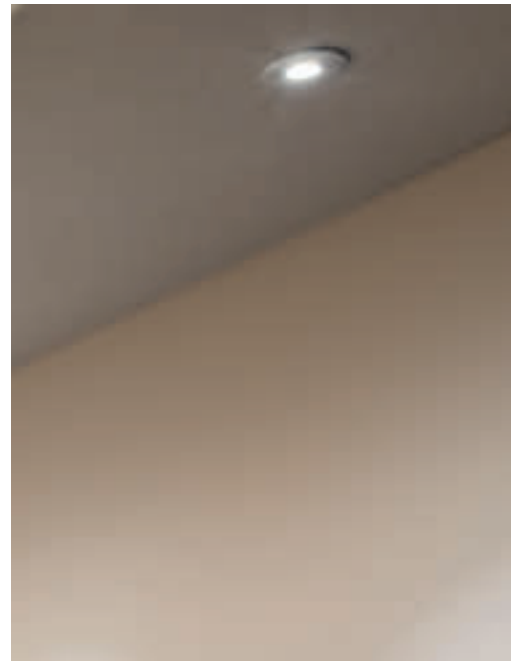

# Hawaii

## Recessed / surface mounted spotlights

Hawaii ist ein Einbaustrahler mit schmalen Ausstrahlungswinkel (30°) und Konstantstromversorgung (350 mA). Er wird als Unterbaubeleuchtung und zur Beleuchtung von Nischen eingesetzt. Installation als Einbau- oder Aufbaumontage mit dem speziellen Abstandhalterzubehör möglich. Die LED-Lichtquelle ist in der Farbtemperatur Kalt (6000K) oder Warmweiß (3000K) erhältlich.

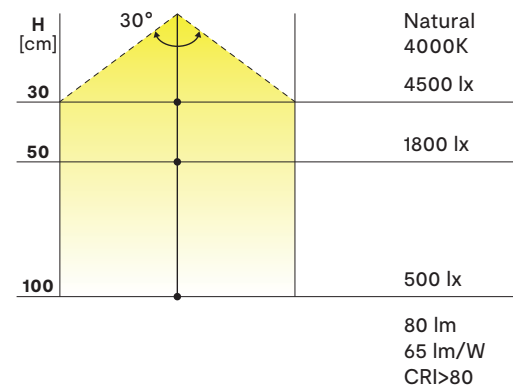









Hawaii




HAWAII 30° 350 mA



	21600050101	1,2 W	Ø 25 mm	6000K
	21600020101	1,2 W	Ø 25 mm	3000K
	21600056501	1,2 W	Ø 25 mm	6000K
	21600026501	1,2 W	Ø 25 mm	3000K

HAWAII 60° 350 mA



	21600066500	1,2 W	Ø 25 mm	6000K
	21600036501	1,2 W	Ø 25 mm	3000K

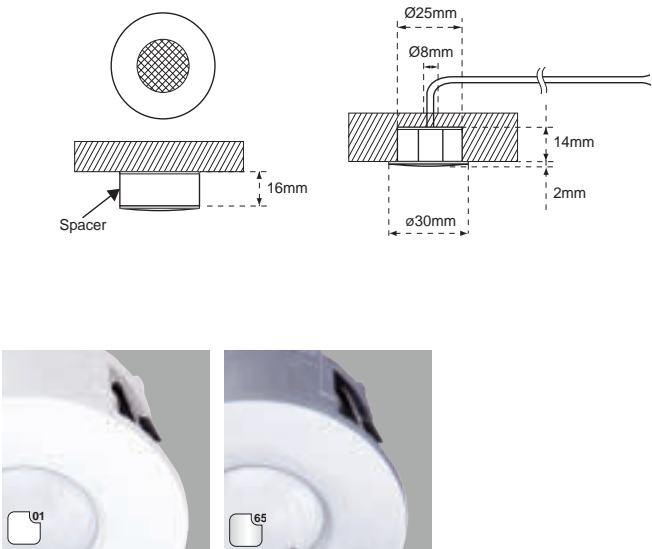

ACCESSORIES AND CONTROL

	12503010101 Max 6 W 68 x 35 x 21 mm
	12503020102 Max 12 W 110 x 45 x 20 mm

ACCESSORIES AND CONTROL

	12503010101 Max 6 W 68 x 35 x 21 mm
	12503020102 Max 12 W 110 x 45 x 20 mm






# Lucky 1




## Surface mounted spotlights

Lucky-1 is a spotlight for under wall units with a round base, characterized by a reduced thickness (5 mm) that allows maximum versatility of application. Surface installation is particularly simple and fast, thanks to the supplied magnetic bracket. The LED source is available with Natural colour temperature (4000K).

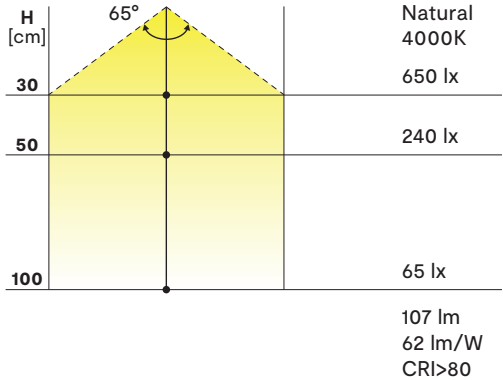




# Lucky 1

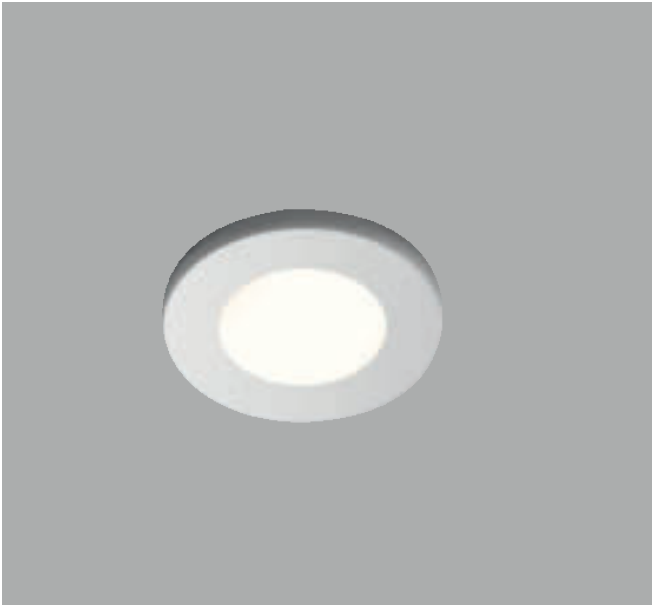

## LUCKY 1 12 V DC

	27900016500ZN	1,7 W	Ø 50 mm	4000K
---	---------------	-------	---------	-------

## ACCESSORIES AND CONTROL




**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262




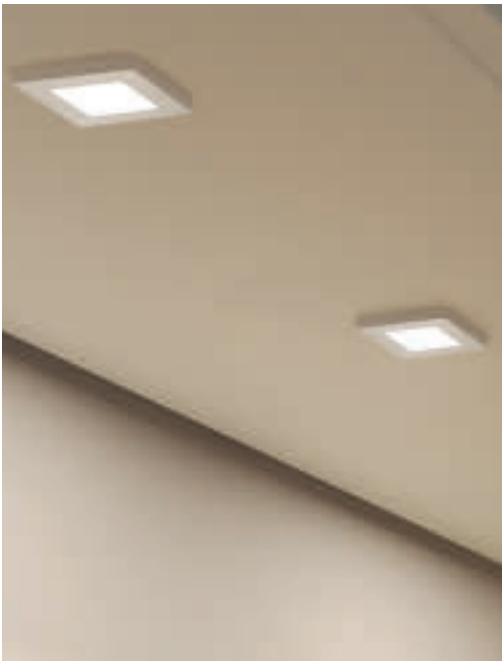

# Lucky 2




## Surface mounted spotlights

Lucky-2 is a square-based under wall spotlight with a reduced thickness (5 mm) that allows maximum versatility of application.

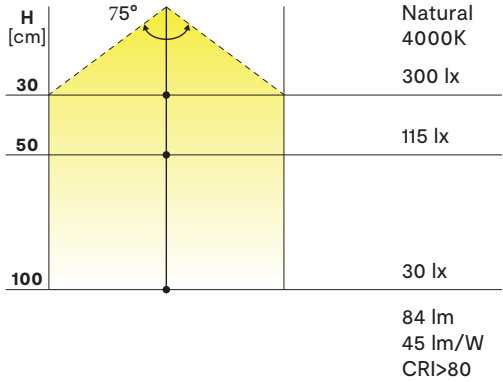



Lucky 2



LUCKY 2 12 V DC

	27900026500ZN	2 W	50 x 50 mm	4000K
--	---------------	-----	------------	-------

ACCESSORIES AND CONTROL



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262






# Lucky 3


## Surface mounted spotlights

Lucky-3 is a spotlight for under wall units with a rectangular base, characterized by a reduced thickness (5 mm) that allows maximum versatility of application.

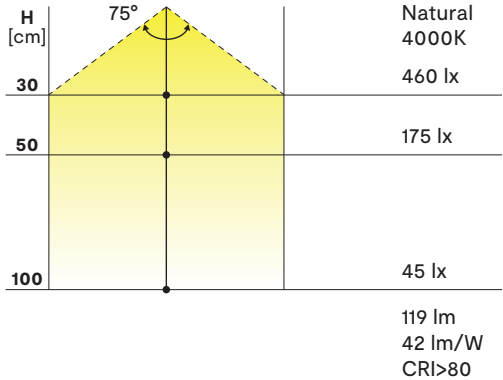




Lucky 3

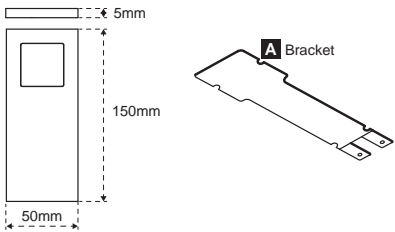

LUCKY 3 12 V DC

	27900036500ZN	2,7 W	150 x 50 mm	4000K
---	---------------	-------	-------------	-------

ACCESSORIES AND CONTROL



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262






# Lucky 4


## Surface mounted spotlights

Lucky-4 is a spotlight for under wall units with a rectangular base, characterized by a reduced thickness (5 mm) that allows maximum versatility of application.

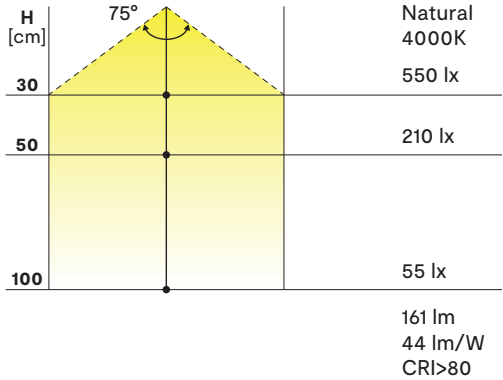




# Lucky 4

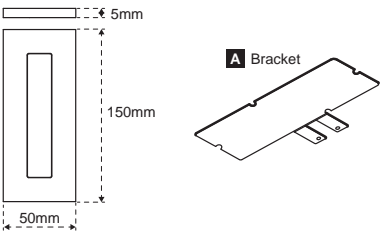

## LUCKY 4 12 V DC

	27900046500ZN	2,7 W	150 x 50 mm	4000K
---	---------------	-------	-------------	-------

## ACCESSORIES AND CONTROL




**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262




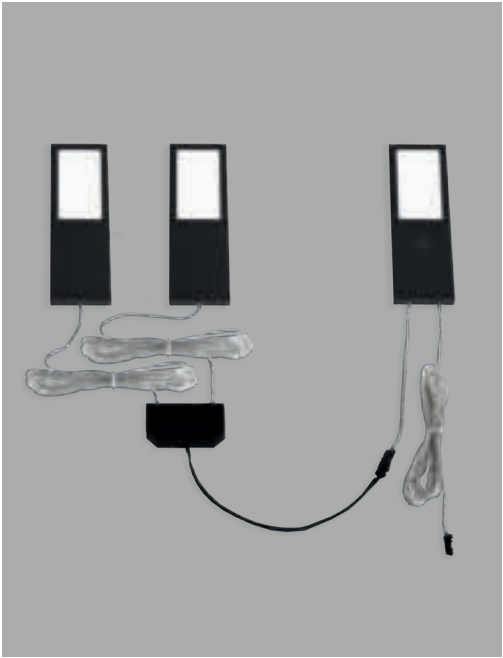

# Lucky 5

## Surface mounted spotlights

Lucky-5 is a spotlight for under wall units with a rectangular base, characterized by a reduced thickness (6.5 mm) that allows maximum versatility of application. The version with integrated switch allows the ignition of the single lamp or of the entire row if connected through the special distributor. The LED source is available with Natural colour temperature (4000K).

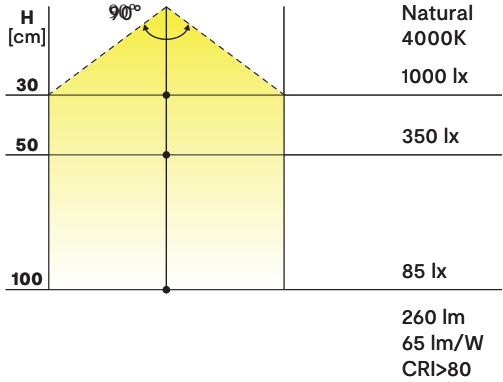







Lucky 5





LUCKY 5 12 V DC


	27900080300ZN	4 W	175 x 50 mm	4000K
	27900089100ZN			

LUCKY 5 TOUCH 12 V DC

	27900090300ZN	4 W	175 x 50 mm	4000K
	27900099100ZN			

LUCKY 5 KIT 3 SPOTS + MEC DRIVER 18 W

	12423530300ZN	12 W		4000K
	12423539100ZN			

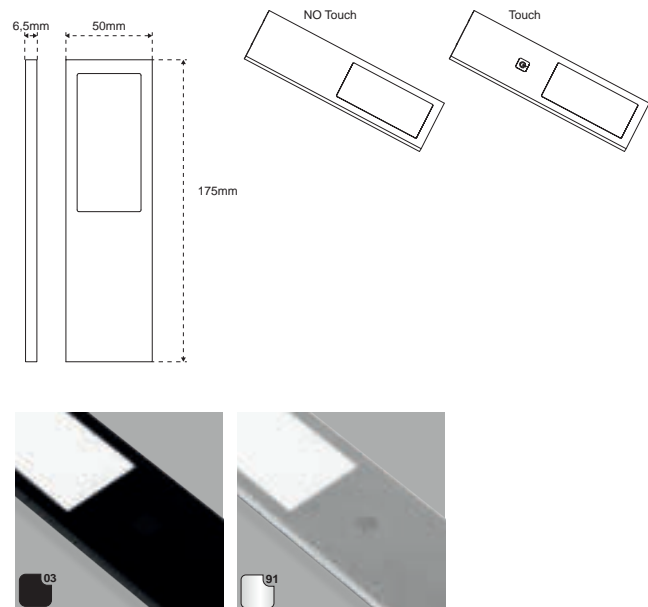

ACCESSORIES AND CONTROL



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262


ACCESSORIES AND CONTROL



**TOUCH SENSOR**  
Interruttore integrato per l'accensione e spegnimento della lampada.



**MEC DRIVER**  
For the selection of the power supply system go to page 262

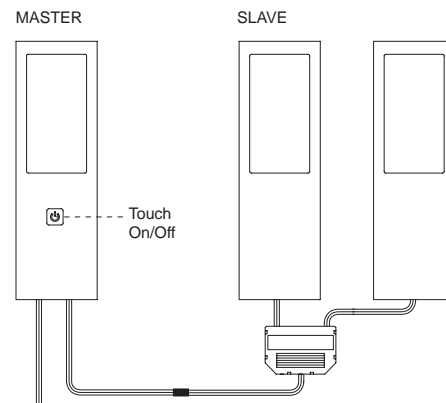





# Blues

## Surface mounted spotlights

Blues is an application spotlight for under wall units: the prism shape allows the inclination of the light beam, which is oriented on the worktop. The LED source is available with Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K. The version with an integrated IR sensor proximity switch allows ignition and temperature variation in the EDC model.



H [cm]	65°	Natural 4000K	EDC 4000K
30		500 lx	500 lx
50		200 lx	200 lx
100		50 lx	50 lx

90 lm  
50 lm/W  
CRI>80







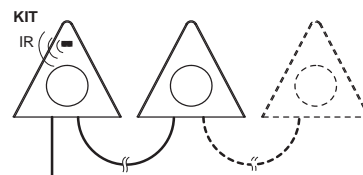

## Blues



### BLUES IRS EDC 12 V

	23300126500ZD	1,8 W	3000-4000K
	23300128500ZD		

### BLUES EDC 12 V

	23300036500ZD	1,8 W	3000-4000K
	23300038500ZD		

### ACCESSORIES AND CONTROL



**IRS SENSOR (BLUES IRS)**  
Fast movement for on and off, hold position for 5 seconds for colour adjustment.



**EMOTION JUMPER (BLUES EDC)**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**SMART SYSTEM (BLUES EDC)**  
To choose the control system for versions without IRS, go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262

### BLUES IRS 12 V

	23300126500Z_	1,8 W	_N \ _W
	23300128500Z_		

### BLUES 12 V

	23300036500Z_	1,8 W	_N \ _W
	23300038500Z_		

### ACCESSORIES AND CONTROL



**IRS SENSOR (BLUES IRS)**  
Fast movement for switching on and off.



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**SMART SYSTEM (BLUES EDC)**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262






# Light Point



## Orientable spotlights

Light Point is a semi-recessed adjustable aluminium spotlight with narrow optics (30°) and constant current supply (350 mA). It is used in niches and showcases, where it offers punctual and comfortable lighting thanks to the backward optical unit. The LED source is available in Cold (5000K).

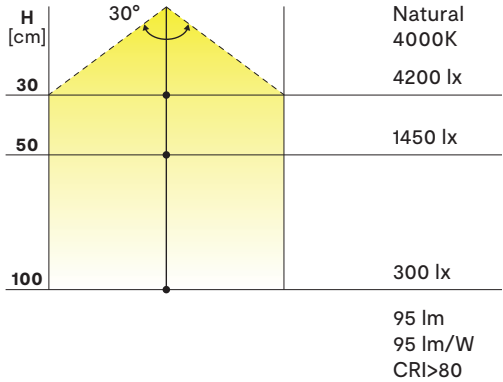





# Light Point

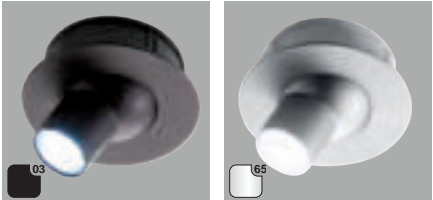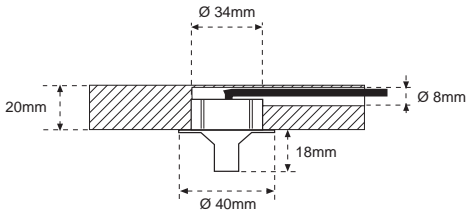


## LIGHT POINT 350 mA

	16800020304ZC	1,0 W	Ø 34 mm	5000K
	16800026504ZC	1,0 W	Ø 34 mm	5000K


## ACCESSORIES AND CONTROL

	12503010101 Max 6 W 68 x 35 x 21 mm
	12503020101 Max 12 W 110 x 45 x 20 mm



SPOT




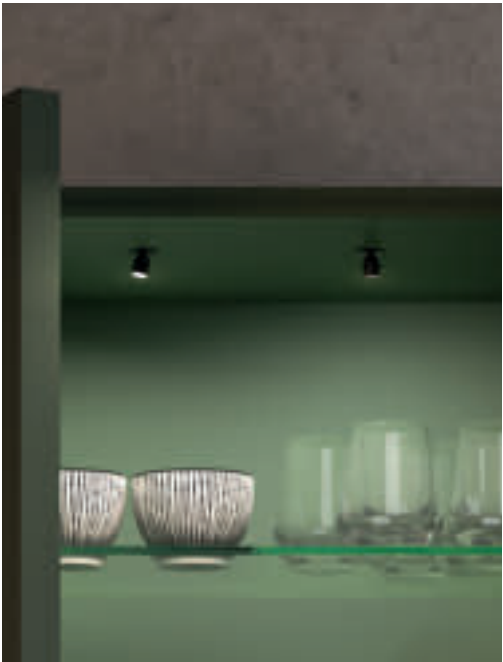

# Flexspot

## Orientable spotlights

Flexspot is a semi-recessed adjustable spotlight, with narrow optics (25°). It is used in niches and showcases, where it offers uniform and comfortable lighting thanks to the microprismatic screen. The LED source is available in the Emotion version that allows the variation from 2700K to 6500K or Emotion Dual Colour colour temperature which allows the variation from 3000K to 4000K for optimal visual comfort.

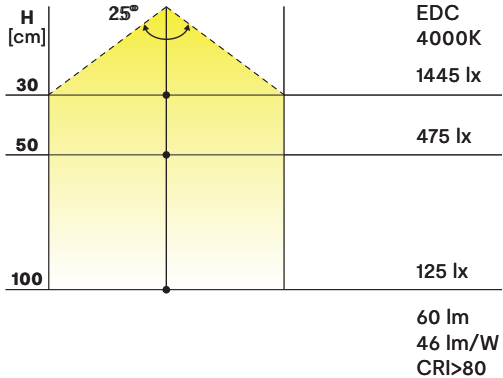





# Flexspot



## FLEXSPOT EDC 12 V DC

	29400010300ZD	1,3 W	Ø 20 mm	3000-4000K
--	---------------	-------	---------	------------

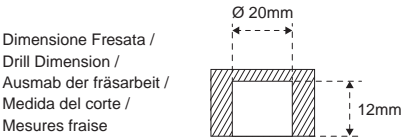

## ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262






# Legis

## Orientable spotlights

Legis is a bedhead spotlight with flexible arm ideal as a reading light. The base, to be installed on the headboard with screws (included), integrates an On/Off switch and a USB socket, useful for charging the phone and other electronic devices. The LED source is proposed with a warm colour temperature (3000K).

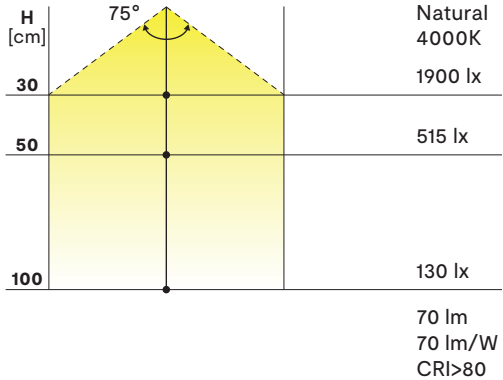




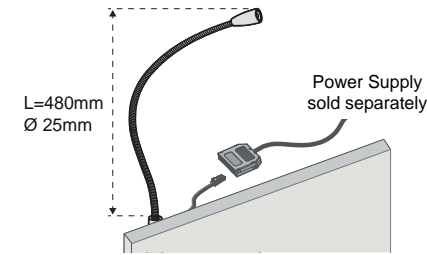


Legis



LEGIS TOUCH 12 V DC

	28000016500ZW	1,2 W	480 mm	3000K
---	---------------	-------	--------	-------



ACCESSORIES AND CONTROL



**TOUCH SENSOR**  
Interruttore integrato per l'accensione e spegnimento della lampada.



**MEC DRIVER**  
For the selection of the power supply system go to page 262

SPOT






# Area Light



## Orientable spotlights

Area Light is a bedhead spotlight with a flexible arm, ideal as a reading light. The head integrates an On/Off switch with 3-step dimming; the lamp is supplied in a kit with one or two elements with power supply included in the package. The LED source is proposed with a warm colour temperature (3000K).

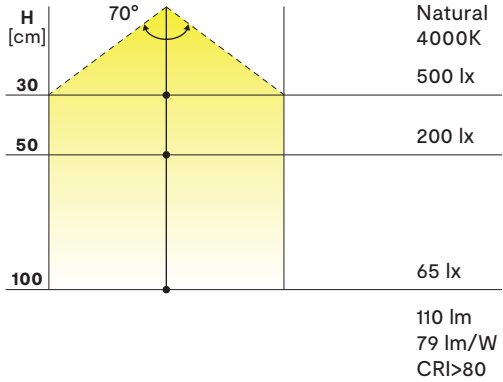





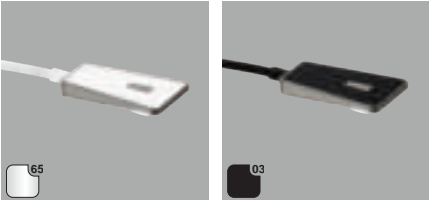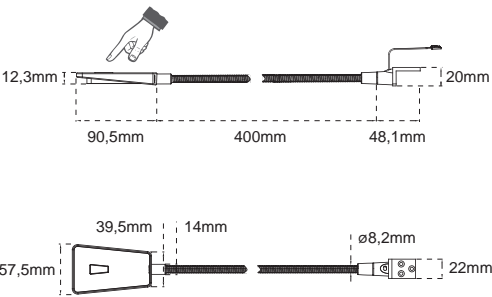

Area Light



AREA LIGHT

 <sup>01</sup>	13300240100	1,4 W	KIT 1 + 1 Driver 4000K
 <sup>03</sup>	13300240300		
 <sup>01</sup>	13300250100	1,4 W	KIT 2 + 1 Driver 4000K
 <sup>03</sup>	13300250300		

ACCESSORIES AND CONTROL



TOUCH SENSOR  
On, off and light intensity adjustment






# Plinthy

## Path-markers

Plinthy is an extremely small step light, ideal as a courtesy light for skirting boards, steps and paths. The optics have been designed to reduce glare; the LED source is available with Natural (4000K) or Hot (3000K) colour temperature.

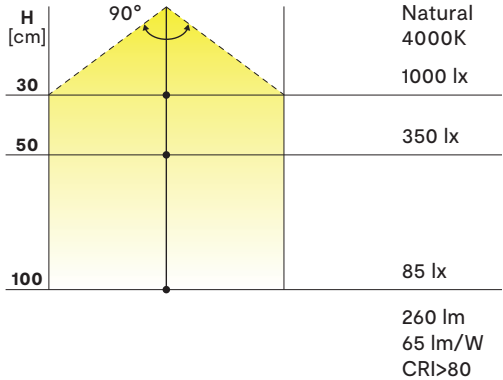




## Plinthy



### PLINTHY 12 V DC

29100010000Z\_ 0,14 W Ø 8,5 mm \_N \ \_W

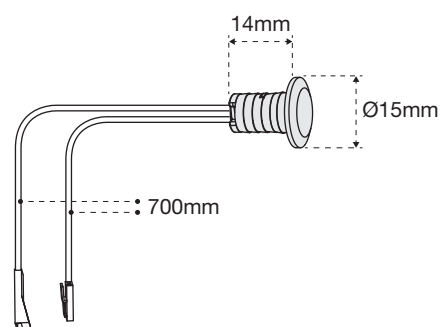

### ACCESSORIES AND CONTROL



#### FIXED COLOUR TEMPERATURE

Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code




#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

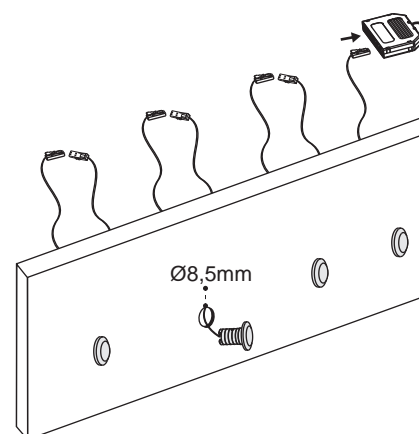






# Smart PIR \ Smart mini

## Rechargeable spotlights

Smart PIR and Smart Mini are cabinet spotlights equipped with lithium battery and rechargeable with charger with micro-USB socket (not included). The installation does not require holes for the passage of cables, just apply the magnetic bracket to the shelf with the screws provided. The PIR sensor, integrated with both models, allows the lamp to be switched on when the door is opened. The LED source is available with Natural colour temperature (4000K).

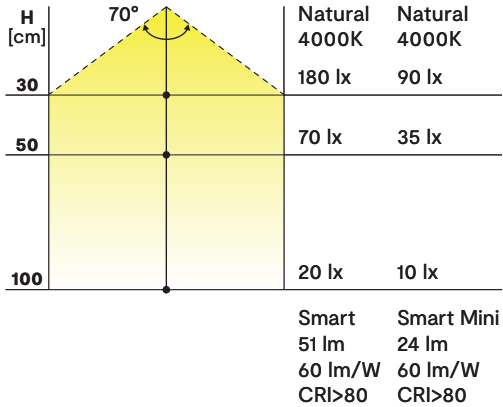







## Smart PIR



### SMART

	26900010100ZN	5 V	0,85 W	4000K
	26900010300ZN			
	26900016500ZN			

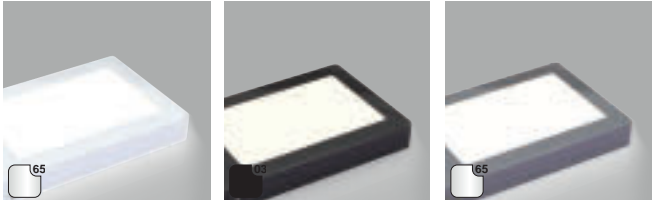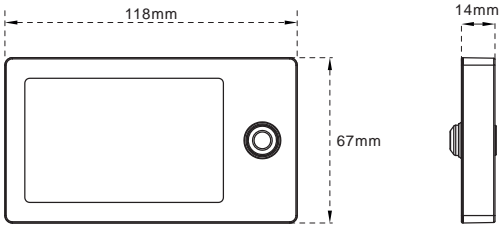

### ACCESSORIES AND CONTROL







**PIR SENSOR**  
The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.

## Smart Mini



### SMART MINI

	26900020100ZN	5 V	0,4 W	4000K
	26900020300ZN			
	26900026500ZN			

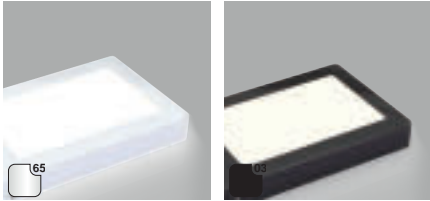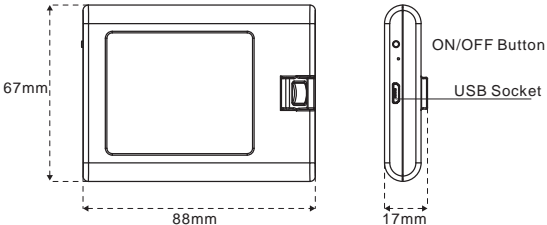

### ACCESSORIES AND CONTROL



**PIR SENSOR**  
The motion sensor turns on the lamp when a presence is detected or when the door is opened. The lamp turns off after 30 seconds of inactivity.




# Light panels.

---






PANNELLI  
LUMINOSI  
—




**168**  
**SOLARIS L5**




**168**  
**SOLARIS  
DOUBLE SIDE**



**169**  
**SOLARIS L7**



**169**  
**SOLARIS  
BACK**



**170**  
**SOLARIS  
LUMI**



**170**  
**SOLARIS  
SNAP-IN**



**174**  
**SOLARIS  
GLAM**



# Tailor made.

---

LIGHT PANELS  
FOR FURNITURE DESIGN  
AND VISUAL COMMUNICATION

Reflector for  
optimised  
luminous  
efficiency

The aluminium  
perimeter profile  
houses the LED  
circuit and ensures  
passive convection


Opal  
polycarbonate  
diffuser  
for uniform  
emission

SOLARIS L5



Solaris luminous display panels enhance the illuminated object by giving it exceptional visibility, thanks to uniformly diffused natural light that is free from reflections, shadows and glare.

Each panel is customisable in terms of shape, size and type of source, and also allows for the creation of different light intensities in different areas.



## Light diffusion

Homogeneous or directional

## Emotion

Colour temperature adjustable from warm 2700K to cool 6500K

## Dimensions

Up to 3000x2000mm with thickness 06-20mm

## Light intensity

Remote intensity adjustment










































## Shapes

Customisable both square and round

## Colour and finish

Available in different finishes



Solaris		Dimensions	Input	N.out	Light source
L5					
	<ul style="list-style-type: none"> <li>Anodised aluminium frame.</li> <li>Suitable as a backlight for furniture and walk-in wardrobes.</li> <li>Suitable for decorative wall applications as visual communication</li> </ul>	Thickness: 20 mm  Max L x H: 3000 x 2000 mm	 	One cable outlet per illuminated side. Single cable option for 12 V versions up to 36 W and 24 V versions up to 72 W	   
DOUBLE SIDE					
	<ul style="list-style-type: none"> <li>Anodised aluminium frame.</li> <li>Lighting on both panels</li> <li>Suitable for signage and visual communication applications</li> </ul>	Thickness: 15 mm  Max L x H: 1500 x 1500 mm	 	One cable outlet per illuminated side. Single cable option for 12 V versions up to 36 W and 24 V versions up to 72 W	   
L7					
	<ul style="list-style-type: none"> <li>Without frame.</li> <li>Suitable as a backlight for furniture and walk-in wardrobes.</li> </ul>	Thickness: 9,5 - 10,5 mm  Max L x H: 2100 x 1100 mm		One cable outlet.	   
BACK					
	<ul style="list-style-type: none"> <li>Without frame.</li> <li>Suitable as a backlight for furniture and walk-in wardrobes.</li> </ul>	Thickness: 13 mm  Max L x H: 3000 x 2000 mm	 	One cable outlet per illuminated side. Single cable option for 12 V versions up to 36 W and 24 V versions up to 72 W	   
LUMI					
	<ul style="list-style-type: none"> <li>Without frame.</li> <li>Suitable as a backlight and light box.</li> <li>Can be integrated with decorated front panels for the production of visuals, window dressing and communication.</li> </ul>	Thickness: 6 mm  Max L x H: 3000 x 2000 mm	 		   
SNAP IN					
	<ul style="list-style-type: none"> <li>Anodised aluminium frame that can be opened for easy insertion and replacement of prints.</li> <li>Suitable for wall applications and as visual communication</li> </ul>	Thickness: 16 mm  Max L x H: 3000 x 2000 mm	 	One cable outlet per illuminated side. Single cable option for 12 V versions up to 36 W and 24 V versions up to 72 W	   







BEP'S STORE.  
CONEGLIANO (TV)




## Solaris L5


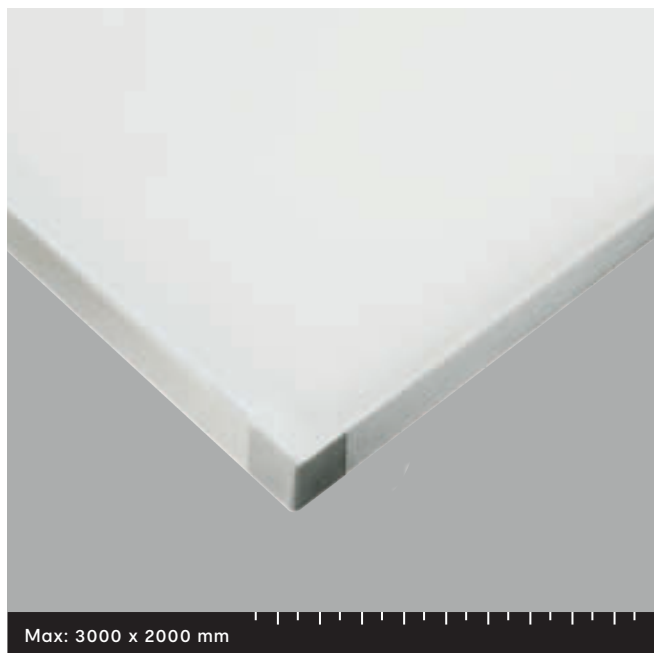


## Backlighting

A light source that fits perfectly into the structure of the display. Solaris is an LED panel with endless customisation possibilities in terms of size, type of light and final application. The front panel can be customised with prints and graphics, making it a valuable visual communication tool for public and commercial spaces: Solaris L5 can be integrated into existing structures, such as nacelles and shelves, wall-mounted or showcased.

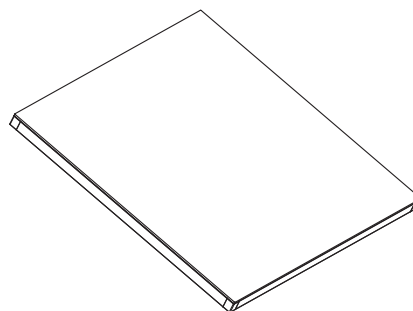


## Solaris Double Side

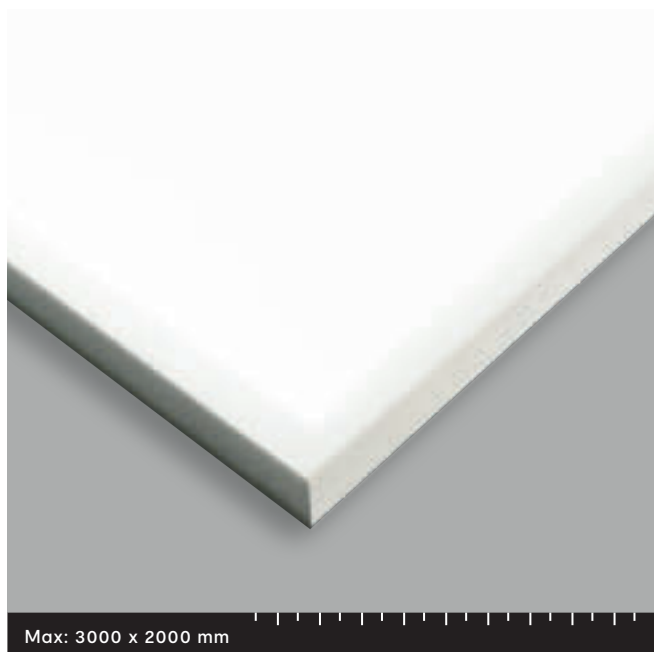


## Illuminated signs

The perfect application for double-sided gondolas and signs with lighting on both sides. Solaris is an LED panel with endless customisation possibilities in terms of size, type of light and final application. The front panel can be customised with prints and graphics, making it a valuable visual communication tool for public and commercial spaces: Solaris Double Side can be integrated into existing structures such as nacelles and shelves, affixed to a wall, placed in a shop window or used as a partition.

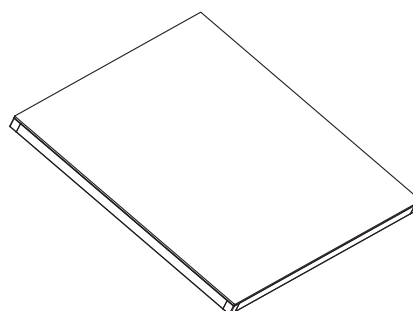




# Solaris L7





## Frameless \ Backlighting

Specifically designed for applications where space is limited, Solaris L7 is a LED panel with a thickness of only 9.5 mm and the possibility of customisation in terms of size, type of light and final application. The front panel can be customised with prints and graphics, making it a valuable visual communication tool for public and commercial spaces: Solaris L7 can be integrated into existing structures, such as nacelles and shelves, wall-mounted or showcased.

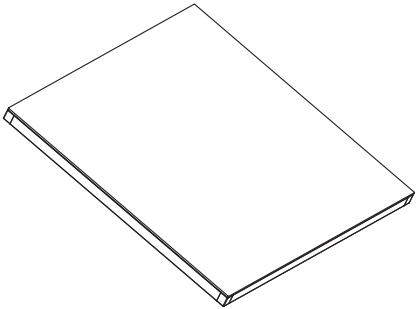


# Solaris Back

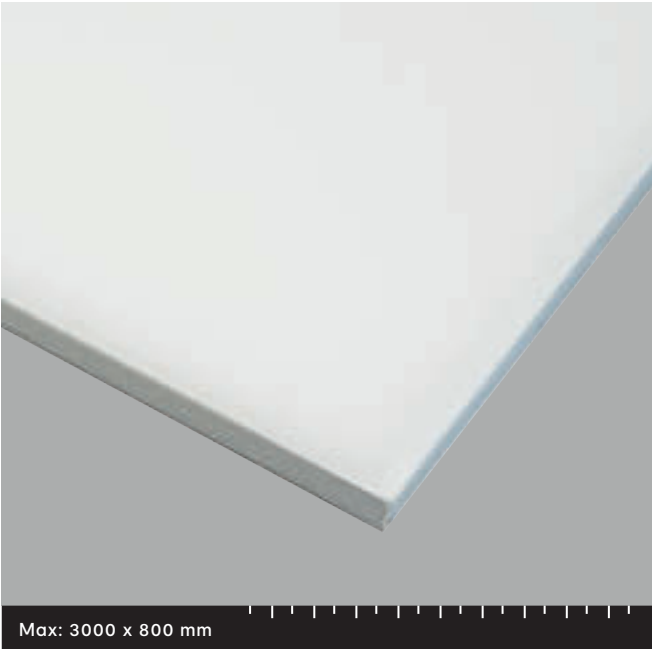



## Backlight

Solaris Back is a backlight with infinite customisation possibilities in terms of size, type of light and final application. The front panel can be customised with prints and graphics, making it a valuable visual communication tool for public and commercial spaces: Solaris Back can be integrated into existing structures, such as cabinets and shelves, in domestic and commercial environments.

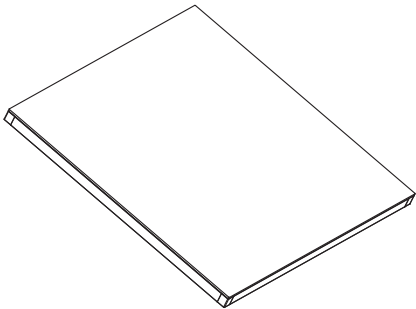




# Solaris Lumi

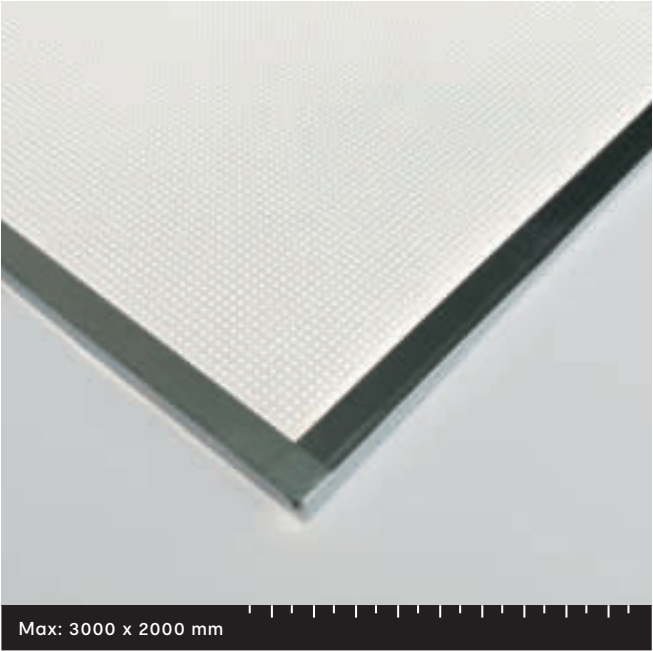

## Light box

The ultra-thin LED panel with edge-lit technology is only 6 mm thick and designed for backlighting. Solaris is an LED panel with endless customisation possibilities in terms of size, type of light and final application. Solaris Lumi is the ideal solution for the backlighting of oft boxes; combined with prints and graphics, it becomes a valuable visual communication tool for public and commercial spaces. Solaris Lumi can be integrated into existing structures, such as nacelles and shelves, wall-mounted or displayed in a shop window.


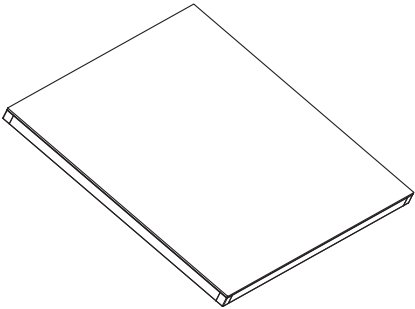


# Solaris Snap-In



## Visual communication

Solaris Snap-In is the most practical way to display your communication whilst allowing for quick replacement. Solaris is an LED panel with endless customisation possibilities in terms of size, type of light and final application. The front panel can be customised with prints and graphics, making it a valuable visual communication tool for public and commercial spaces: Solaris L5 can be integrated into existing structures, such as nacelles and shelves, wall-mounted or showcased.

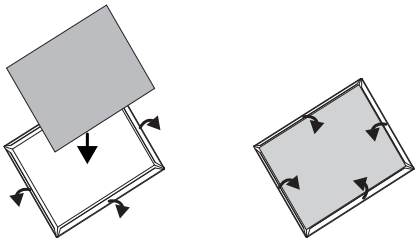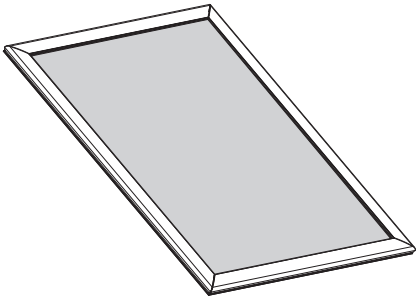








FOCUS ON

---

# Solaris: illuminating art

---

IMPROVING EXHIBITION  
QUALITY IN ARTISTIC  
AND COMMERCIAL SPACES

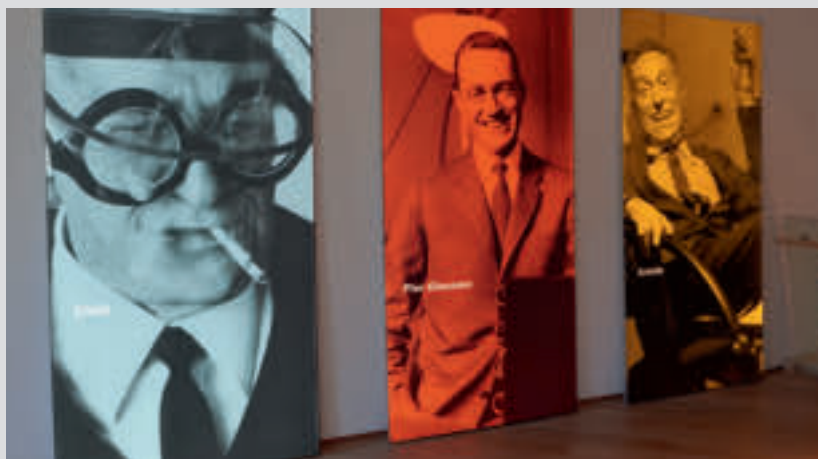

Solaris is the ideal solution in museums and retail environments, where optimal lighting management promotes visitor involvement and highlights the works of art and products on display.

Easy customisation and design flexibility make it the perfect choice for all kinds of installations.





ELISABETTA

Frontespizio del  
Testament Front p

11 aprile 1708 / 11<sup>th</sup> April 1708



◀ IL DESIGN DEI CASTIGLIONI.  
RICERCA, SPERIMENTAZIONE,  
METODO.  
GALLERIA HARRY BERTOIA,  
PORDENONE (2019)

▲ I VOLTI DELLA PIETAS  
VENEZIANA.  
PALAZZO SCALA CONTARINI DEL  
BOVOLO, VENEZIA (2018)





SOLARIS GLAM




# Harmony, light, culture, beauty.

L&S SUPPORTS THE VENICE PAVILION  
AT THE 17<sup>TH</sup> INTERNATIONAL ARCHITECTURE  
EXHIBITION "LA BIENNALE" IN VENICE 2021



We are constantly investing in research and open innovation processes, creating the harmony of culture and beauty through light.

A clear example of this commitment can be seen in the Sala degli Artefici, where the new Solaris Glam illuminates eight works by young artists who won the "Artefici del nostro tempo" competition.

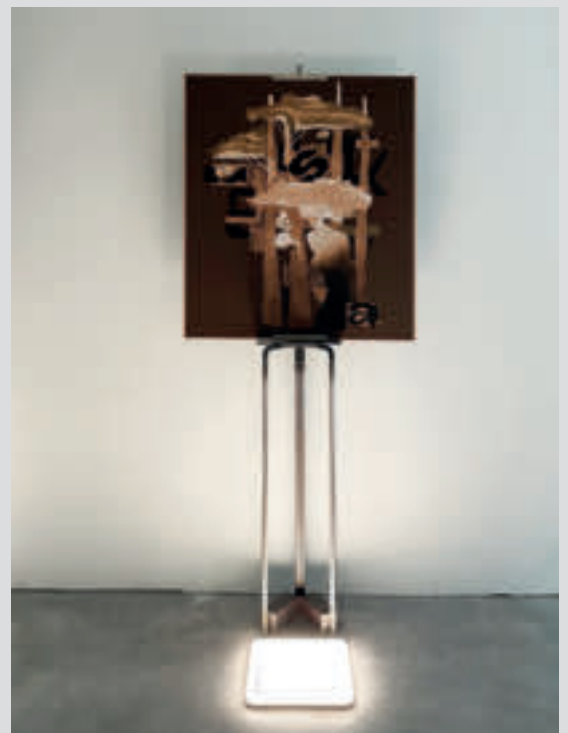



# Modular systems.

---






ELECTRI-  
FIED  
MODULAR  
STRUCTURES  
—




178  
POWERLINE

ELECTRI-  
FIED RAILS  
—



192  
SLIDING



192  
BINARO UNO



196  
SIGN



216  
K CONCEPT

LIGHTING  
SHELVES  
—



222  
BOARD



224  
PAPER  
SHELF



FOCUS ON

---

# Powerline: easy to install, quick to move, perfect to illuminate.

---

ELECTRIFIED VERSATILE  
STRUCTURE, SUITABLE FOR  
RESIDENTIAL AND RETAIL ENVIRONMENTS

Constantly changing application needs, heterogeneous user types and the reorganisation of exhibition and domestic spaces require a system that is intuitive and easy to install, adaptable without having to intervene on connections and electrical systems.

Powerline is the shelf system that integrates the light sources and power supply into the structural elements, simplifying the construction of the cabinet and improving the aesthetics and quality of the light source.







# The Powerline system.

---





The electrified rails enable the configuration of the wall system to be varied by simply moving the shelves to the desired position, whilst the integrated light fittings ensure perfectly even and comfortable lighting.

Equipped with a wide range of accessories, different types of shelves and hangers, Powerline is an elegant and practical solution for shopfitting and walk-in wardrobes.



## Full versatility

Brackets for single or continuous shelves, made of wood or glass, straight, inclined or with support for hanging tube.

## Modularity.

The modular structures are modular and can be integrated.

## Plug & play.

Connectors integrated in the brackets for quick connection.

## Practicality.

The illuminated shelves can be moved freely without the need for electrical intervention.

## Tailor-made.

Dimensions and finishes can be customised.

## Visual harmony.

Integration in commercial or residential environments.




# Rails for 10 mm panels









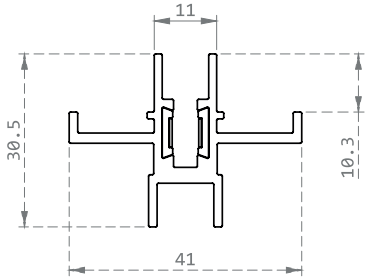



## SINGLE TRACK ELECTRIFIED 24 V DC

	90400030300	2.5 m
	90400040300	3 m
	90400031200	2.5 m
	90400041200	3 m


Single electrified track for backings up to 10 mm thick, compatible with all types of brackets. Available in a black or grey finish.



## CAPS FOR SINGLE TRACK 24 V DC

	13202070300	Closure cap	
	12607250300	Upper connector	1 m
	12607130300	Upper connector	4 m
	12607260300	Bottom connector	1 m
	12607240300	Bottom connector	4 m
	13202071000	Closure cap	
	12607251000	Upper connector	1 m
	12607131000	Upper connector	4 m
	12607261000	Bottom connector	1 m
	12607241000	Bottom connector	4 m

End cap to be placed at the top or bottom of the electrified track. The "connector" version is equipped with a cable with a "Mec Driver" compatible connector. Available in a black or grey finish.

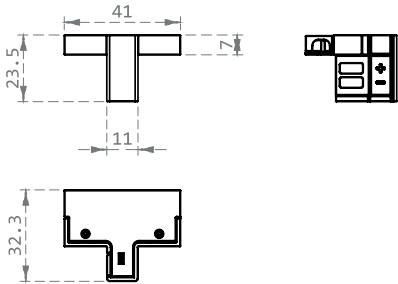








# Rails for 10 mm panels









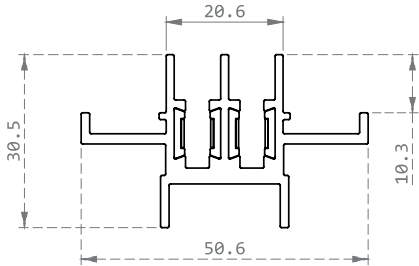



## ELECTRIFIED DOUBLE TRACK 24 V DC

	90400050300	2.5 m
	90400060300	3 m
	90400051200	2.5 m
	90400061200	3 m


Electrified double rail for back panels up to 10 mm thick, specifically for installations where several shelves need to be placed side by side, without having to use the "line" brackets. Available in a black or grey finish.



## CAPS FOR DOUBLE TRACK 24 V DC

	13202080300	Closure cap	
	12607290300	Upper connector	1 m
	12607270300	Upper connector	4 m
	12607300300	Bottom connector	1 m
	12607280300	Bottom connector	4 m
	13202081000	Closure cap	
	12607291000	Upper connector	1 m
	12607271000	Upper connector	4 m
	12607301000	Bottom connector	1 m
	12607281000	Bottom connector	4 m

End cap to be placed at the top or bottom of the double electrified track. The "connector" version is equipped with a cable with a "Mec Driver" compatible connector. Available in a black or grey finish.

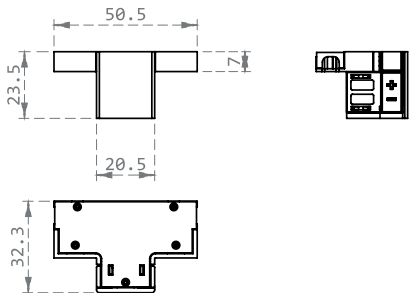








## Rails for 18 mm panels









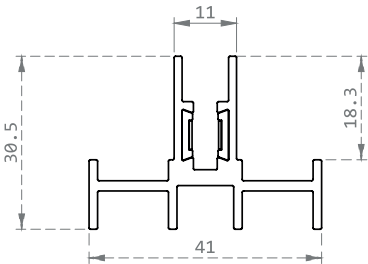



### SINGLE TRACK ELECTRIFIED 24 V DC

 03	90400010300	2.5 m
 03	90400020300	3 m
 65	90400011200	2.5 m
 65	90400021200	3 m


Single electrified track for back panels up to 18 mm thick, compatible with all types of brackets. Available in a black or grey finish.



### CAPS FOR SINGLE TRACK 24 V DC

 03	13202070300	Closure cap	
 03	12607250300	Upper connector	1 m
 03	12607130300	Upper connector	4 m
 03	12607260300	Bottom connector	1 m
 03	12607240300	Bottom connector	4 m
 65	13202071000	Closure cap	
 65	12607251000	Upper connector	1 m
 65	12607131000	Upper connector	4 m
 65	12607261000	Bottom connector	1 m
 65	12607241000	Bottom connector	4 m

End cap to be placed at the top or bottom of the electrified track. The "connector" version is equipped with a cable with a "Mec Driver" compatible connector. Available in a black or grey finish.

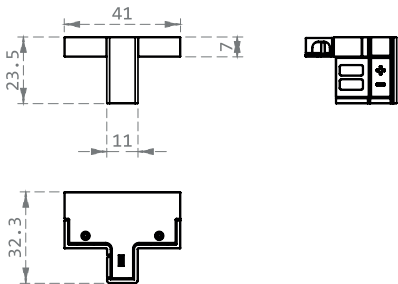










# Brackets for wooden shelves







## BRACKETS FOR PROJECTING CONNECTOR

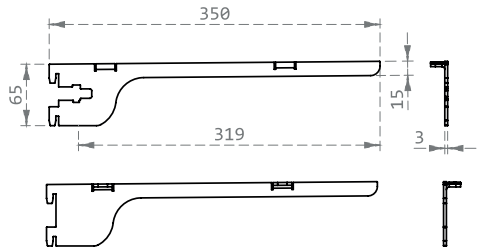	12422460300	Kit 2 x
	12422466500	Kit 2 x


Pair of left and right brackets. On the left-hand version, space is provided for quick and easy installation of the power connector for L&S lights (sold separately). The kit is available in black and grey finishes.



## 24 V DC POWER SUPPLY CONNECTOR

	12606930300	75 mm
	12607310300	430 mm
	12606931000	75 mm
	12607311000	430 mm

Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.

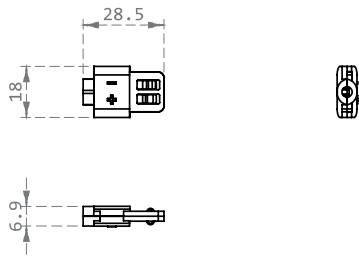






## Brackets for wooden shelves





### BRACKETS FOR CONCEALED CONNECTOR

 03	12422450300	Kit 2 x
 65	12422456500	Kit 2 x

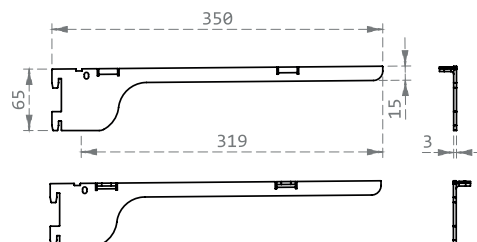
Bracket kit for concealed connector for wooden shelves. Pair of left and right brackets. When used with the appropriate retractable connector bracket (sold separately), they make the shelf electrified to accommodate L&S lights. The kit is available in black and grey finishes.







### SUPPORT FOR CONCEALED CONNECTOR

 03	13202060300
 65	13202066500


Bracket support with concealed connector, suitable for wooden shelves over 18 mm thick or for glass shelves from 3 mm to 12 mm. In the case of glass shelves, the accessory acts as a lock for the shelf. Available in a black or grey finish.



### 24 V DC POWER SUPPLY CONNECTOR

 03	12606930300	75 mm
 03	12607310300	430 mm
 65	12606931000	75 mm
 65	12607311000	430 mm

Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.









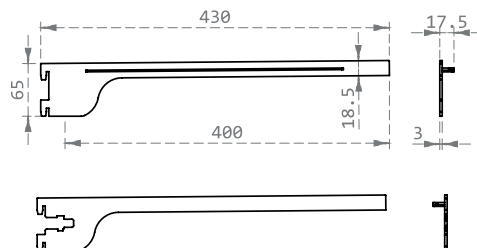
## "Line" series brackets







### "LINE" OPENING AND CLOSING BRACKETS

	12422510300	Kit 2 x electrified
	12422500300	Kit 2 x without light
	12422516500	Kit 2 x electrified
	12422506500	Kit 2 x without light


Pair of left and right brackets, designed to flank and align several shelves. In the electrified version, the left bracket has a slot for the power connector for L&S lights (sold separately). The kit is available in black and grey finishes.







### "LINE" CENTRAL BRACKETS

	12208830300	electrified
	12208820300	without light
	12208836500	electrified
	12208826500	without light

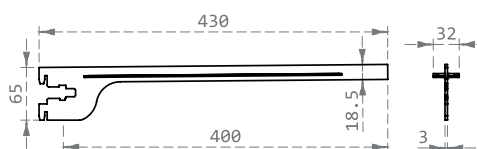
Central bracket designed to allow several shelves to be placed side by side and aligned. The electrified version has a slot for the power connector for L&S lights (sold separately). Available in a black and grey finishes.



### 24 V DC POWER SUPPLY CONNECTOR

	12606930300	75 mm
	12607310300	430 mm
	12606931000	75 mm
	12607311000	430 mm

Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.

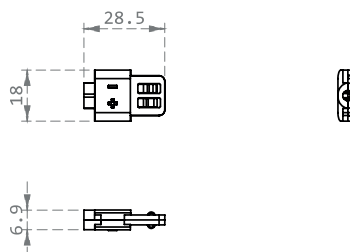







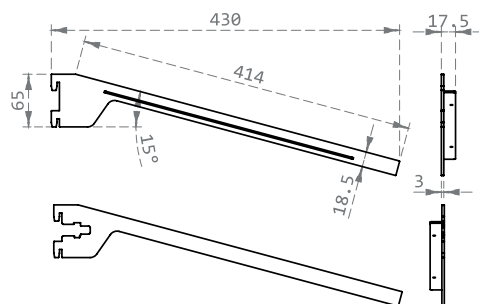
## "Line" series inclined brackets







### INCLINED BRACKETS OPENING AND CLOSING "LINE"

 03	12422530300	Kit 2 x electrified
 03	12422520300	Kit 2 x without light
 65	12422536500	Kit 2 x electrified
 65	12422526500	Kit 2 x without light


Pair of left and right angled brackets, designed to allow several shelves to be placed side by side and aligned. In the electrified version, the left bracket has a slot for the power connector for L&S lights (sold separately). The kit is available in black and grey finishes.







### "LINE" INCLINED BRACKETS

 03	12208850300	electrified
 03	12208840300	without light
 65	12208856500	electrified
 65	12208846500	without light

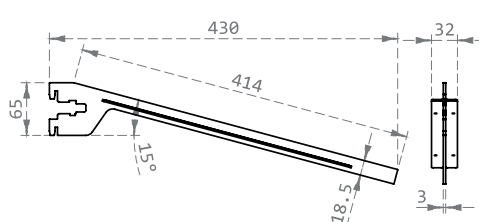
Central inclined bracket designed to be able to place and align several shelves side by side. The electrified version has a slot for the power connector for L&S lights (sold separately). Available in a black and grey finishes.



### 24 V DC POWER SUPPLY CONNECTOR

 03	12606930300	75 mm
 03	12607310300	430 mm
 65	12606931000	75 mm
 65	12607311000	430 mm

Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.

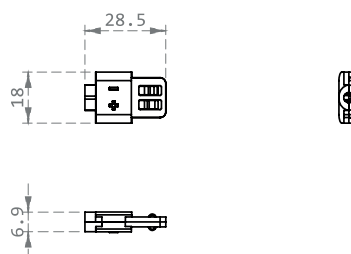








## Brackets for glass shelves





### BRACKETS FOR GLASS SHELVES

 03	12422470300	Kit 2 x electrified
 03	12422480300	Kit 2 x without light
 65	12422476500	Kit 2 x electrified
 65	12422486500	Kit 2 x without light

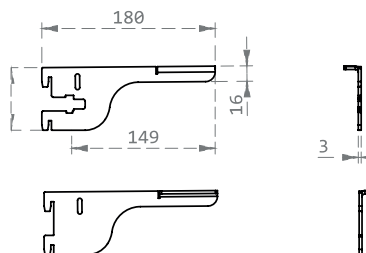
Pair of left and right brackets. On the left-hand version, space is provided for quick and easy installation of the power connector for L&S lights (sold separately). The kit is available in black and grey finishes.







### SUPPORT FOR CONCEALED CONNECTOR

 03	13202060300
 65	13202066500


Bracket support with concealed connector, suitable for wooden shelves over 18 mm thick or for glass shelves from 3 mm to 12 mm. In the case of glass shelves, the accessory acts as a lock for the shelf. Available in a black or grey finish.



### 24 V DC POWER SUPPLY CONNECTOR

 03	12606930300	75 mm
 03	12607310300	430 mm
 65	12606931000	75 mm
 65	12607311000	430 mm

Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.

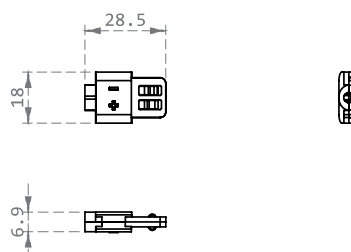






Brackets for Mec Rack







BRACKETS FOR MEC RACKS

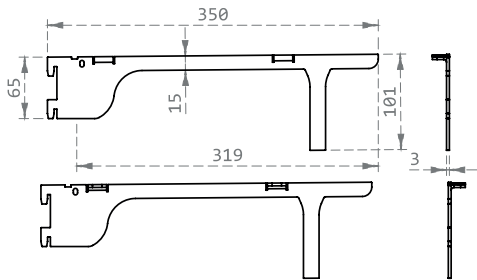 03	12422540300	Kit 2 x
 65	12422546500	Kit 2 x


Pair of left and right brackets specially designed to accommodate the Mec Rack hanger tube. On the left-hand version, space is provided for quick and easy installation of the power connector for L&S lights (sold separately). The kit is available in black and grey finishes.



24 V DC POWER SUPPLY CONNECTOR

 03	12606930300	75 mm
 03	12607310300	430 mm
 65	12606931000	75 mm
 65	12607311000	430 mm


Power supply connector for L&S lamps, suitable for shelves in bracket or concealed bracket versions. Available in a black or grey finish.

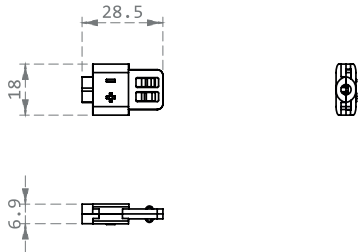






Flush-mounted sliding system

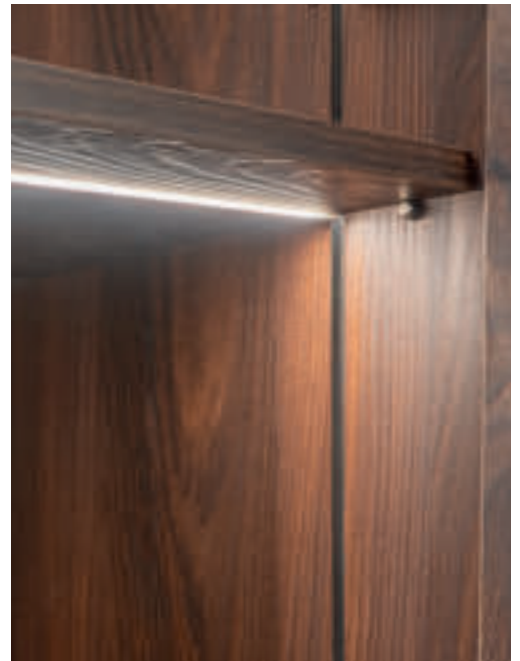

Binario Uno

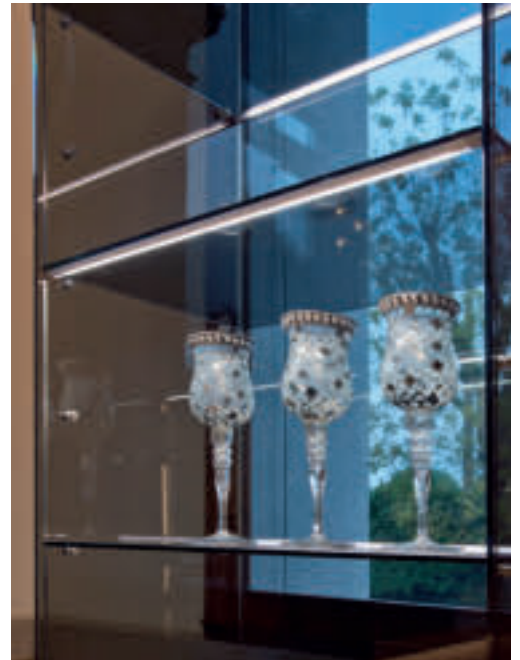

Sliding system protruding



# Electrified rails

## Electrification systems for cabinets

The electrified rails are power supply systems that allow the lamps to be connected to the driver, guaranteeing the possibility of moving the shelves: it will thus be possible to customise the composition at a later date without the need for electrical maintenance.

Installed on the side or back of the cabinet, they are a practical and discreet solution that helps reduce the presence of cables without affecting the aesthetics of the cabinet.



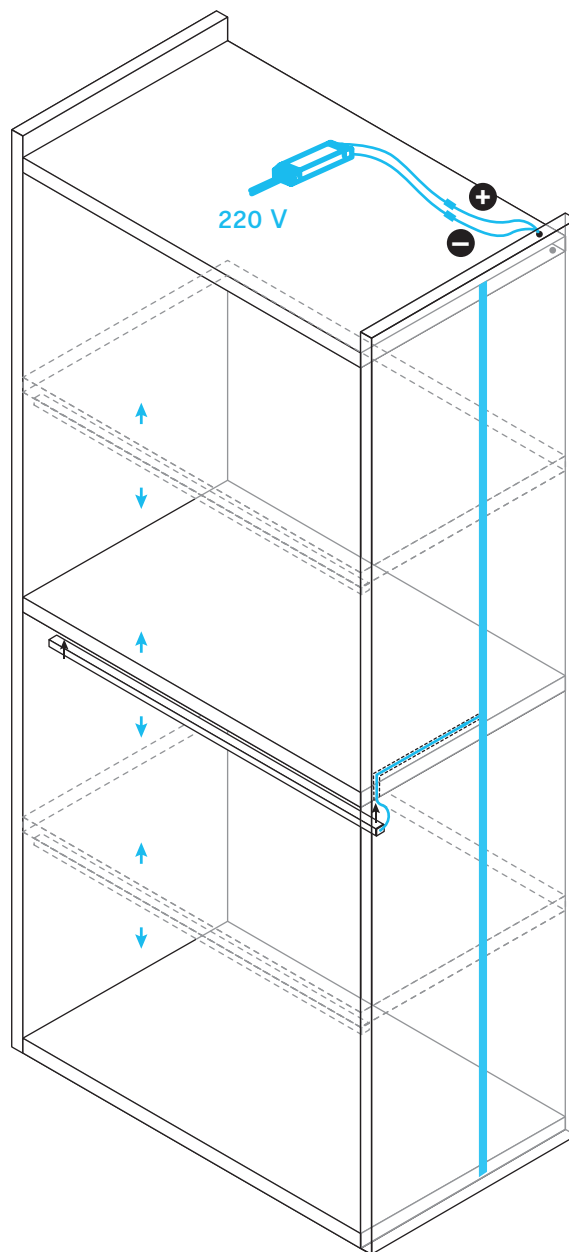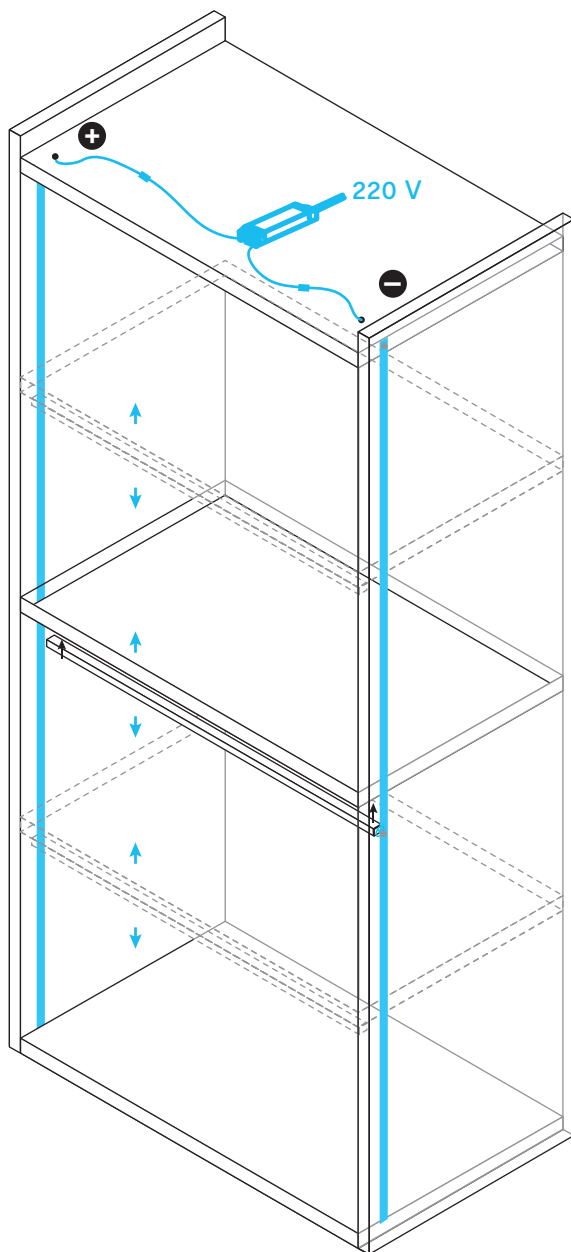

## Sliding

- \ Electrical connection on both sides
- \ Surface or recessed installation in milled cut-outs
- \ Requires lamps with integrated sliding connector
- \ Compatible with Mec Driver
- \ Contact without cables
- \ Fully concealed cables (Mec version)
- \ Available at 24 V DC
- \ Also suitable for display cabinets (projecting installation)

## Binario Uno

- \ Single-sided electrical connection
- \ Flush-mounted installation on milling cut-out
- \ Compatible with standard lamps with customised cable
- \ Compatible with Mec Driver
- \ Cable housing inside the track
- \ Submarine connector concealed in the rail
- \ Available at 24 V DC



Sliding




A rail-mounted electrification system, Sliding allows maximum flexibility in the supply of light inside wardrobes, bookcases or display cabinets, enabling shelves to be moved without the need for electrical intervention. The recessed version requires a small milling on the inner sides, limiting the visual impact of the rail, which blends in perfectly with the cabinet itself. The projecting version is installed with double-sided adhesive tape (included) and is particularly suitable for display windows.

Sliding is compatible with the following lamps, supplied with integrated connector:

- Flylight-S
- Kubi-S
- Malindi-S
- MiniKendo-S
- Skyline-S
- Twilight-S



**Surface rail**  
Protruding electrified rail to be applied with double-sided adhesive tape (included). Conductive, usable in showcases







**Recessed rail**  
Flush-mounted electrified rail, applicable to both sides and backs of wooden furniture

PROJECTING SLIDING


19800400000	3000 mm	24 V DC
-------------	---------	---------

CABLES AND CONNECTORS

	Cable with pin connector for connection to the rail.	L. 1000 mm 12421130000
	Cable with faston connector for connection to the rail.	L. 1000 mm 12417111000
	Cable with connector for connection to Mec Driver.	L. 500 mm 12608030000



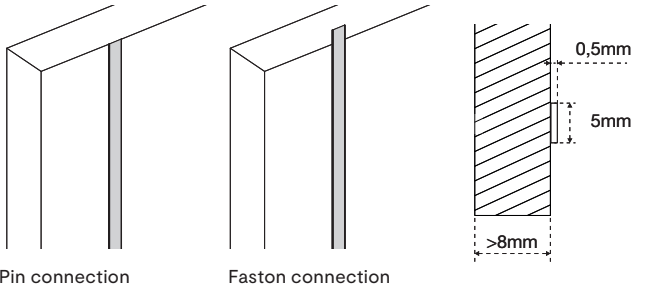

**MEC DRIVER**  
For the selection of the power supply system go to page 262




RECESSED SLIDING


19800410000	3000 mm	24 V DC
-------------	---------	---------

CABLES AND CONNECTORS

	Cable with faston connector for connection to the rail.	L. 1000 mm 12417111000
	Cable with connector for connection to Mec Driver.	L. 500 mm 12608030000




**MEC DRIVER**  
For the selection of the power supply system go to page 262

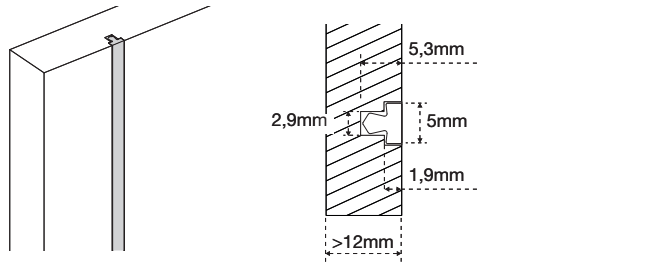




# Binario Uno



**Conductor rail**

Integrated into the post, the linear conductor allows the single support to be electrified.

Flush-mounted electrified rail for maximum flexibility in supplying shelf lights for inside wardrobes or bookcases. It only requires milling on one side of the cabinet, speeding up installation and limiting visual impact. Available in black or white finish, thanks to the rubber flaps it blends perfectly with the surface of the cabinet itself.


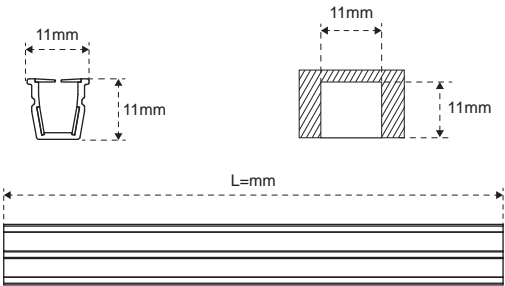


## BINARIO UNO

01	23400790300	3000 mm	24 V DC
----	-------------	---------	---------

## CABLES, CONNECTORS AND ACCESSORIES

	Wired end cap for connecting the rail to the power supply.	L. 2000 mm 12608100300
	Submarine connector for connecting rail to lamp.	L. 100 mm 12608110300
	Cable for connection to lamp with 10 mm source (LS10).	L. 100 mm 12608120000
	Cable for connection to lamp with 5 mm source (LS5).	L. 100 mm 12608130000
	Spare key for opening and closing the submarine connector	12208970300
	<b>MEC DRIVER</b> For the selection of the power supply system go to page 262	

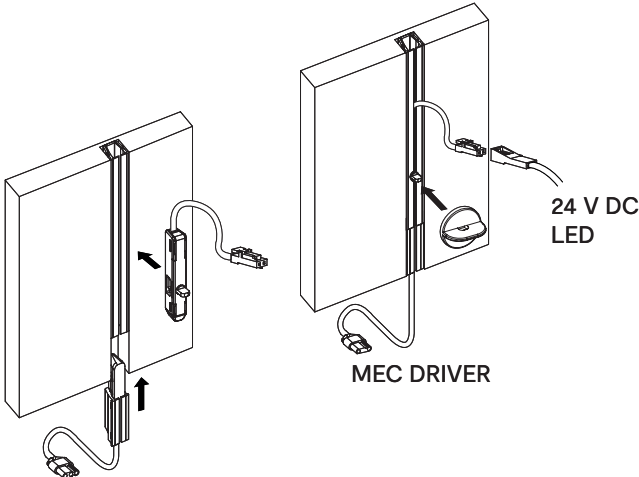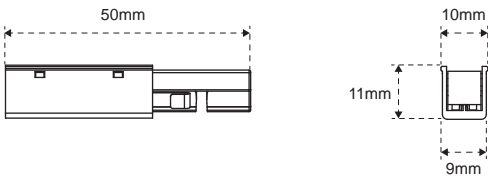



FOCUS ON

---

# Sign: the perfect synthesis of functional light that furnishes.

---

STYLE AND FLEXIBILITY.  
A FUNCTIONAL AND CONSISTENT SOLUTION IN ALL  
INDOOR ENVIRONMENTS: KITCHEN,  
LIVING AREA, SLEEPING AREA,  
BATHROOM, OFFICE, SHOPS.

Sign traces a horizontal line of light that divides up the room, following the architecture of the spaces and creating a continuous effect of light and decoration in various domestic environments.







The structural element, a matt black anodised aluminium profile, can be complemented with a range of accessories and hanging cabinets to help furnish the home and beyond.













Sign integrates a pair of linear lamps for a homogeneous dual-emission effect that lends an immersive atmosphere to the home environment.

The upper profile has a wallwasher courtesy light effect, whilst the lower profile ensures proper lighting with a functional output, preventing the need to install additional light sources to illuminate the worktop.









The wall profile can accommodate cables of various sizes, acting as a cable duct and helping to organise the elements in an orderly manner.

The 90° internal and external angles enable architectural volumes to be followed, creating a continuous effect of light and decoration in the different rooms of the home.

The IP44 degree of protection enables it to be installed in environments subject to humidity, splashing water and frequent cleaning, such as bathrooms and kitchens.

Switching and dimming of the light is available on request with the integration of the IR sensor or via remote controls.










## Bracket

The aluminium fixing bracket is fixed to the wall using screws and dowels.

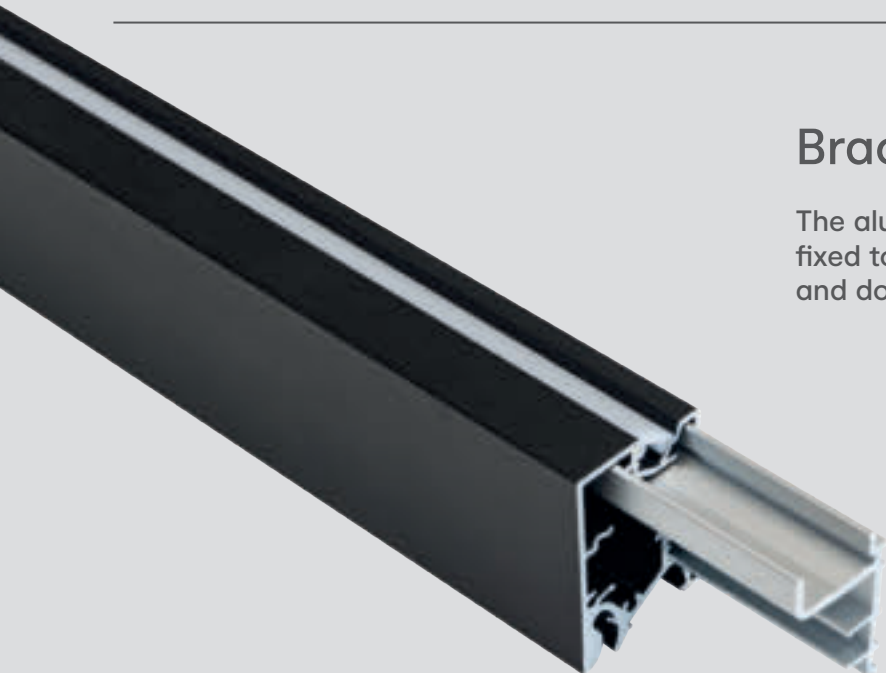

## Cover

The cover profile, made of black anodised aluminium, is snapped onto the bracket. The internal compartment acts as a cable duct, helping to organise cables and electrification elements for Sign and other accessories.




## Protection

The IP44 protection rating means that Sign can also be used in environments that are subject to moisture or require frequent cleaning.

IP44



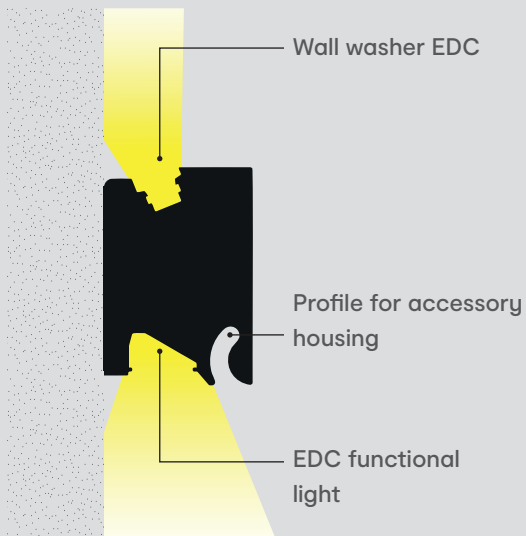

SIMULATION OF SIDE VIEW WITHOUT HEADERS


## Dedicated optics

The light sources are equipped with specially designed optics to create an upward wall washer effect and to illuminate the work surface evenly and comfortably.



## Corners

On request, the profiles can be cut at 45° to allow Sign continuity on corner walls.

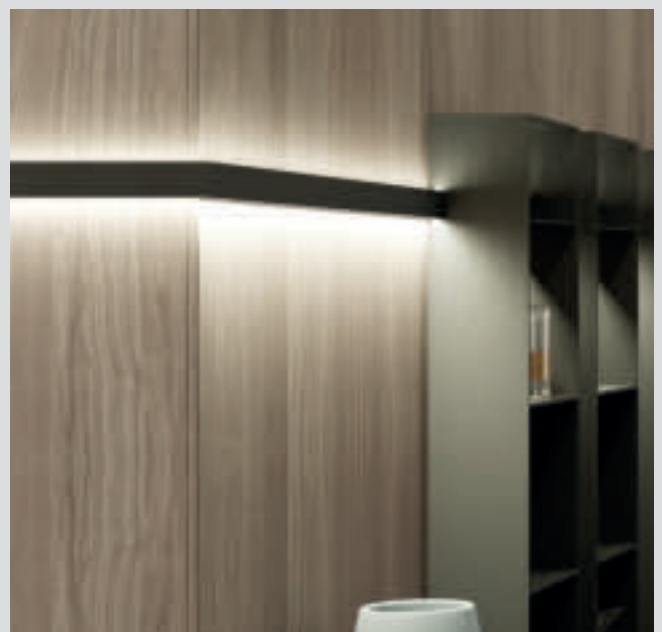













Tailor-made: 200 mm ~ 3000 mm

# Sign

## Modular elements

The wide range of accessories offered, the modular open modules, the shelves and the storage units, make Sign suitable for any domestic environment, from the kitchen to the bathroom, from the living area to the home office and the sleeping area.



Designed by:  
Michele Marcon Designer




## Sign







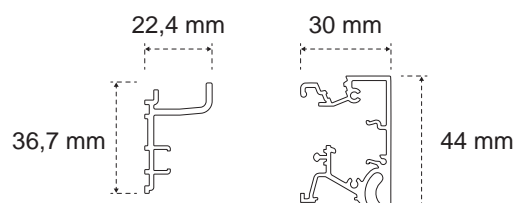

On request, the profile is available cut to size and with corner joints.

For use as a decorative and courtesy light we recommend the top and bottom combination 120 + 120 LEDs/m, for functional use, e.g., in kitchens, offices or on worktops, we recommend the top combination 120 + 120 LEDs/m and the bottom combination 240 + 240 LEDs/m.



### SIGN EDC 24 V DC

120+240 LEDs/m

	91700350300AEBF	36,7 W	1200 mm	3000-4000K
	91700320300AEBF	46,2 W	1500 mm	3000-4000K
	91700360300AEBF	55,6 W	1800 mm	3000-4000K
	91700370300AEBF	74,5 W	2400 mm	3000-4000K
	91700380300AEBF	93,6 W	3000 mm	3000-4000K
	91700390300AEBF	121,7 W	3900 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).




#### SMART SYSTEM

For the choice of control system go to page



#### MEC DRIVER

For the selection of the power supply system go to page

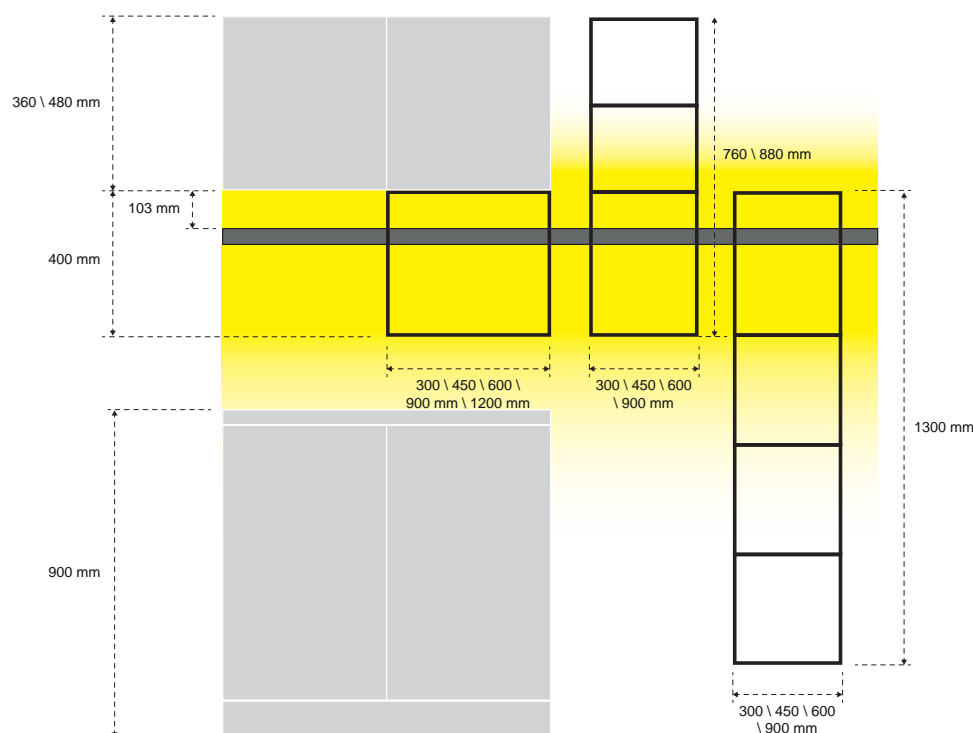

Example of application in the kitchen






# Horizontal modules



Open modules made of black scratch-resistant brushed aluminium, which can be clicked onto the Sign profile.



## HORIZONTAL MODULES 1 COMPARTMENT

 <sup>03</sup>	91700020300	300 x 400 x 150 mm
 <sup>03</sup>	91700030300	450 x 400 x 150 mm
 <sup>03</sup>	91700040300	600 x 400 x 150 mm




## HORIZONTAL MODULES 2 COMPARTMENTS

 <sup>03</sup>	91700050300	900 x 400 x 150 mm
---	-------------	--------------------



## HORIZONTAL MODULES 3 COMPARTMENTS

 <sup>03</sup>	91700060300	1200 x 400 x 150 mm
---	-------------	---------------------







# Vertical modules



Open modules made of black scratch-resistant brushed aluminium, which can be clicked onto the Sign profile.







## UPPER VERTICAL MODULES 3 COMPARTMENTS

	91700070300	300 x 760 x 150 mm
	91700080300	450 x 760 x 150 mm
	91700090300	600 x 760 x 150 mm
	91700100300	900 x 760 x 150 mm







## UPPER VERTICAL MODULES 3 COMPARTMENTS

	91700110300	300 x 880 x 150 mm
	91700120300	450 x 880 x 150 mm
	91700130300	600 x 880 x 150 mm
	91700140300	900 x 880 x 150 mm



## LOWER VERTICAL MODULES 4 COMPARTMENTS

	91700150300	300 x 1300 x 150 mm
	91700160300	450 x 1300 x 150 mm
	91700170300	600 x 1300 x 150 mm
	91700180300	900 x 1300 x 150 mm




Accessories




SET OF 4 HOOKS

	91700190300
---	-------------

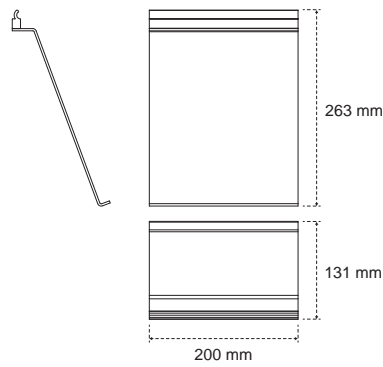



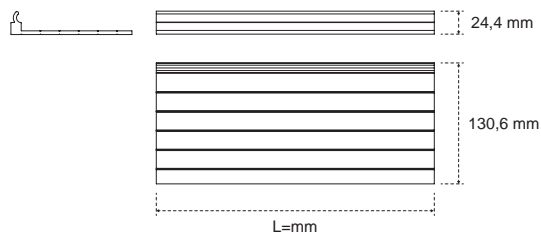


TABLET HOLDER

	91700260300
--	-------------




SIGN SHELVES

	91700270300	286 mm
	91700280300	390 mm
	91700290300	436 mm
	91700300300	586 mm
	91700310300	886 mm

The shelves can be integrated into the open modules.




Kitchen accessories

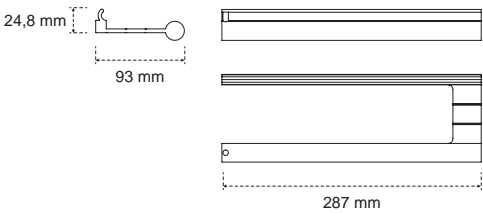


ROLL HOLDER

 91700210300

Available, on request 337 mm

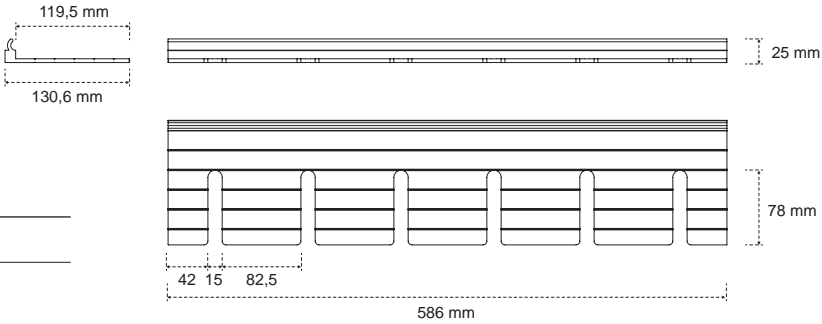

GLASS HOLDER

 91700240300




Bathroom accessories




TOILET PAPER ROLL HOLDER

 91700220300




TOWEL HOLDER

 91700200300

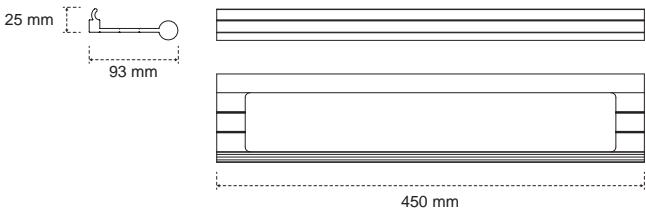


SOAP DISH

 91700250300

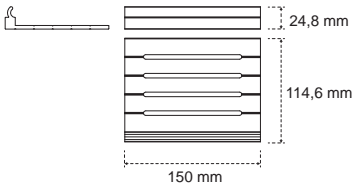

CUP HOLDER FOR TOOTHBRUSHES

 91700230300












Custom: 200 mm ~ 3000 mm

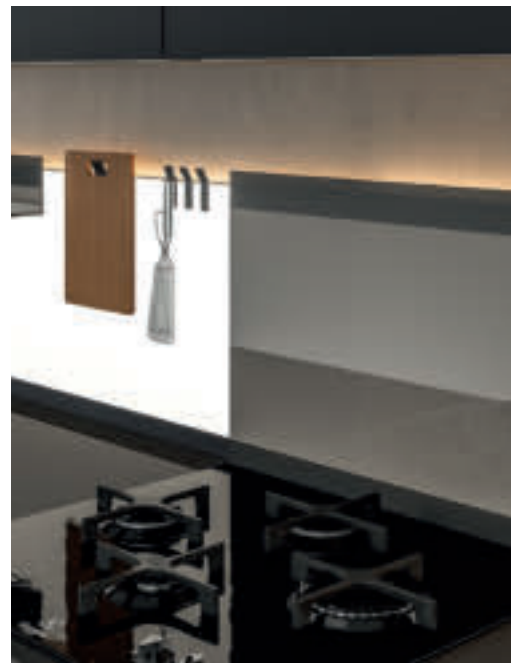

# K Concept

## Light panel

K Concept is a light panel that, when used as a backrest, allows the worktop to be illuminated in an elegant and comfortable way. The LED source Emotion Dual Colour allows the variation of the colour temperature from 3000K to 4000K; the Wall Washer version integrates a vertical effect of wall washing that can be activated independently. The dedicated line of accessories, including shelves, roll holders and electrical sockets, allows you to better organize the workspace. The panels, of customizable size, can be combined with each other using K Socket module as a junction.



Disegnato da:  
Egidio Panzera Architect




# K Concept



## LIGHT PANEL



K PANEL

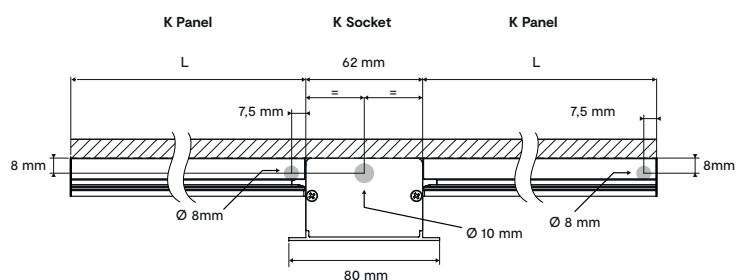

## ACCESSORIES



K SOCKET



K ROLL HOLDER



K METAL SHELF




K GLASS SHELF



K BRACKET





K FIRE PROTECTION

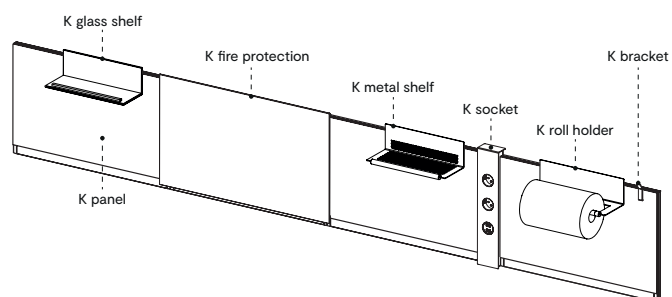




## K Panel

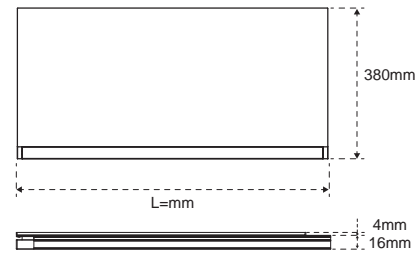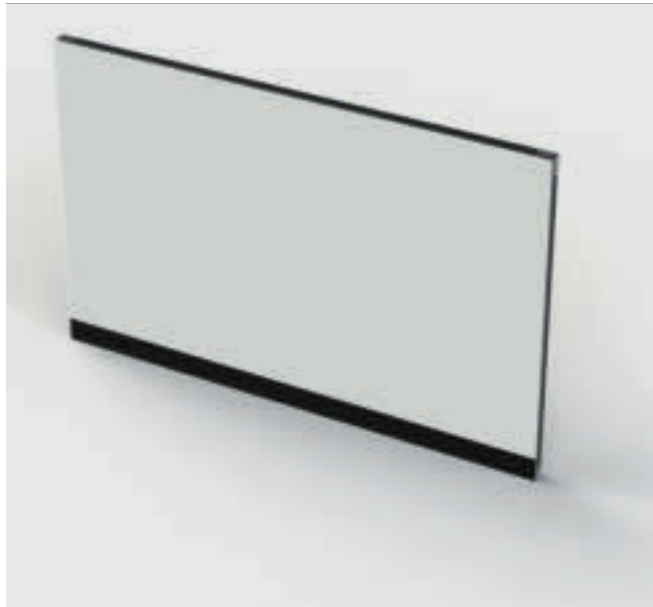












1 source














1 source + wall washer

### K PANEL A1 EDC 24 V DC

	27600240300APD	5,9 W	500 mm	3000-4000K
	27600250300APD	7,2 W	600 mm	3000-4000K
	27600260300APD	8,5 W	700 mm	3000-4000K
	27600270300APD	9,8 W	800 mm	3000-4000K
	27600280300APD	11,1 W	900 mm	3000-4000K
	27600290300APD	15,0 W	1200 mm	3000-4000K
	27600300300APD	18,9 W	1500 mm	3000-4000K
	27600310300APD	22,8 W	1800 mm	3000-4000K
	27600320300APD	30,6 W	2400 mm	3000-4000K
	27600330300APD	34,5 W	2700 mm	3000-4000K
	27600340300APD	38,4 W	3000 mm	3000-4000K

### K PANEL B1 EDC 24 V DC + WALLWASHER

	27600460300APD	11,5 W	500 mm	3000-4000K
	27600470300APD	14,1 W	600 mm	3000-4000K
	27600480300APD	16,7 W	700 mm	3000-4000K
	27600490300APD	19,3 W	800 mm	3000-4000K
	27600500300APD	21,9 W	900 mm	3000-4000K
	27600510300APD	29,7 W	1200 mm	3000-4000K
	27600520300APD	37,5 W	1500 mm	3000-4000K
	27600530300APD	45,3 W	1800 mm	3000-4000K
	27600540300APD	60,9 W	2400 mm	3000-4000K
	27600550300APD	68,7 W	2700 mm	3000-4000K
	27600560300APD	76,5 W	3000 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268






#### MEC DRIVER


For the selection of the power supply system go to page 262



## K Panel

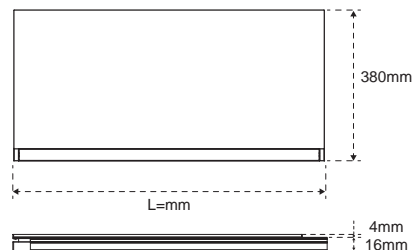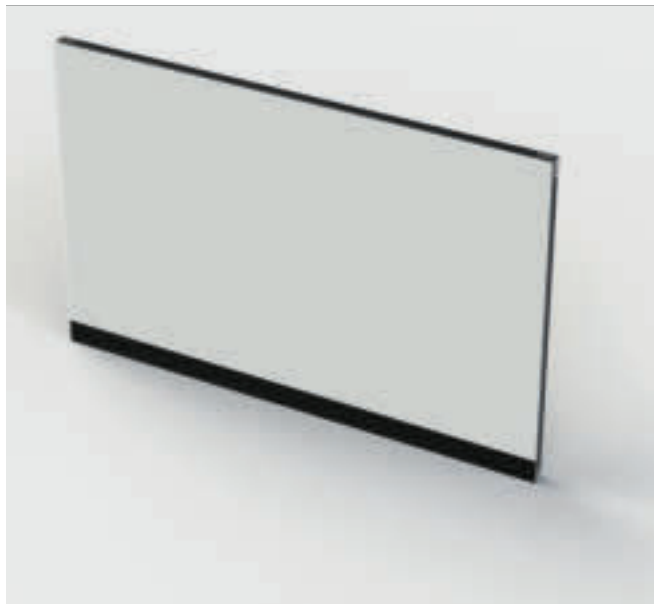












2 sources



2 sources + wall washer

### K PANEL A2 EDC 24 V DC

	27600350300APD	11,7 W	500 mm	3000-4000K
	27600360300APD	14,3 W	600 mm	3000-4000K
	27600370300APD	16,9 W	700 mm	3000-4000K
	27600380300APD	19,5 W	800 mm	3000-4000K
	27600390300APD	22,1 W	900 mm	3000-4000K
	27600400300APD	29,9 W	1200 mm	3000-4000K
	27600410300APD	37,7 W	1500 mm	3000-4000K
	27600420300APD	45,5 W	1800 mm	3000-4000K
	27600430300APD	61,1 W	2400 mm	3000-4000K
	27600440300APD	68,9 W	2700 mm	3000-4000K
	27600450300APD	76,7 W	3000 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM












For the choice of control system go to page 268



#### MEC DRIVER

For the selection of the power supply system go to page 262

### K PANEL B2 + WALLWASHER

	27600570300APD	17,3 W	500 mm	3000-4000K
	27600580300APD	21,4 W	600 mm	3000-4000K
	27600590300APD	25,1 W	700 mm	3000-4000K
	27600600300APD	29,0 W	800 mm	3000-4000K
	27600610300APD	32,9 W	900 mm	3000-4000K
	27600620300APD	44,6 W	1200 mm	3000-4000K
	27600630300APD	56,3 W	1500 mm	3000-4000K
	27600640300APD	68,0 W	1800 mm	3000-4000K
	27600650300APD	91,4 W	2400 mm	3000-4000K
	27600660300APD	103,1 W	2700 mm	3000-4000K
	27600670300APD	114,8 W	3000 mm	3000-4000K

### ACCESSORIES AND CONTROL



#### EMOTION JUMPER

The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



#### SMART SYSTEM

For the choice of control system go to page 268




#### MEC DRIVER

For the selection of the power supply system go to page 262




Accessories

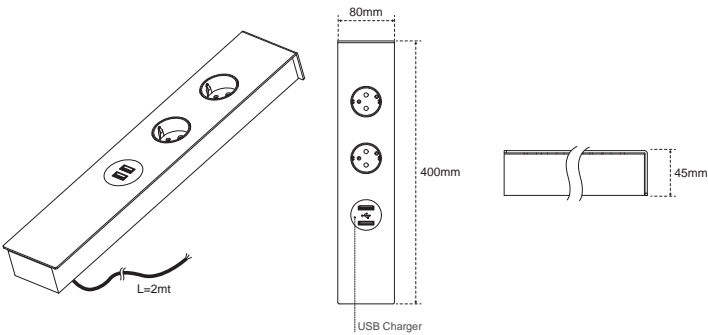


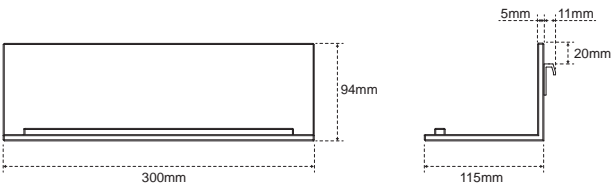
K SOCKET

 27600140300

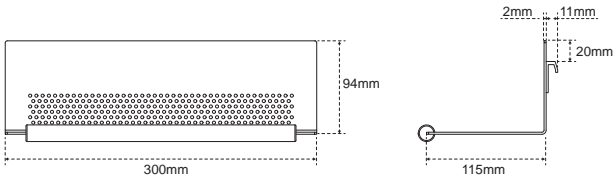

K METAL SHELF

 27600160300 94 x 300 mm




K GLASS SHELF

 27600170300 94 x 300 mm




# Accessories

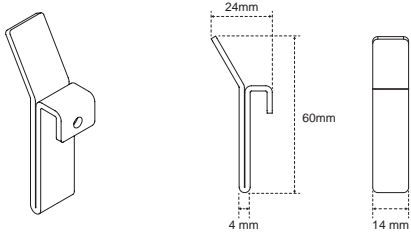


## K BRACKET

	27600150300
---	-------------

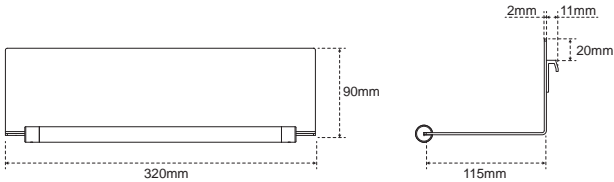


## K ROLL HOLDER


	27600180300	94 x 320 mm
---	-------------	-------------



## K FIRE PROTECTION

	27600190301	383 x 650 mm
	27600200301	383 x 950 mm



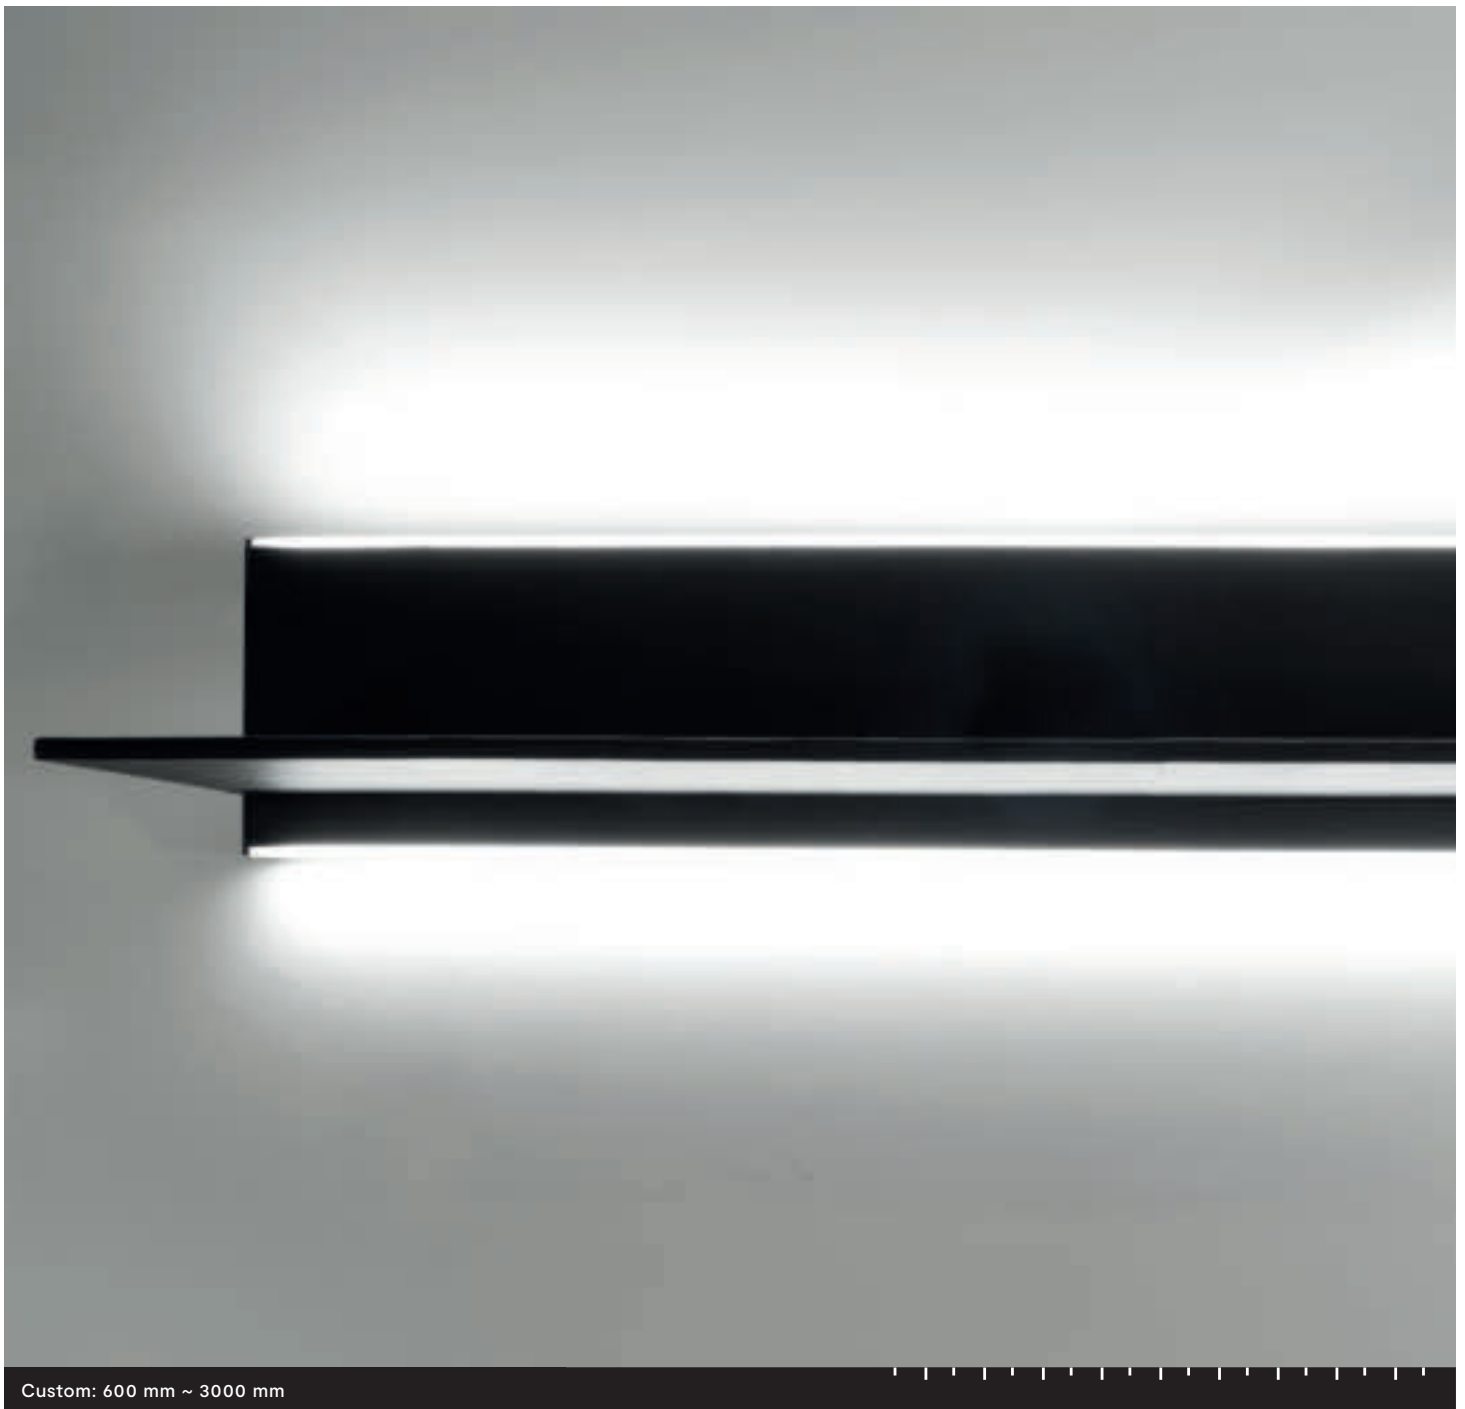

Custom: 600 mm ~ 3000 mm

# Board

## Lighting shelf

Characterized by its minimalist design, Board is a luminous shelf in matt black painted aluminum that adapts to almost any domestic and contract space.

The top, with a capacity of 1 kg / 100 mm, is characterized by a striped pattern that contributes to the support of the objects on display; the hollow back makes it possible to house wiring and control systems, thus ensuring the cleanliness of the wall.

The double wall washer light source offers comfortable and customizable ambient lighting, thanks to the Emotion LED technology that allows the colour temperature to vary from warm white 2700K to cold 6500K.










Board






BOARD 12 V

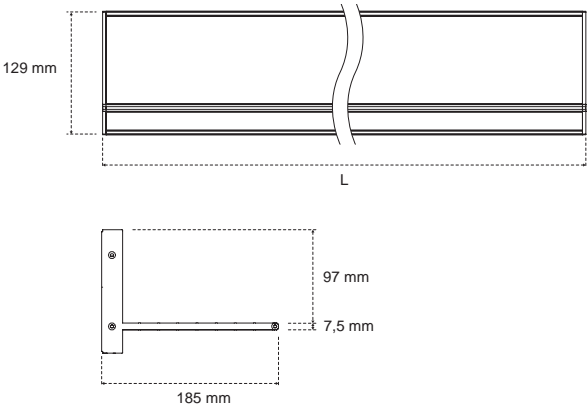
 <sup>03</sup>	On request	14,4 W	600 mm	2700-6500K
 <sup>03</sup>	On request	21,6 W	900 mm	2700-6500K
 <sup>03</sup>	On request	24 W	1000 mm	2700-6500K
 <sup>03</sup>	On request	28,8 W	1200 mm	2700-6500K



ACCESSORIES AND CONTROL

	<b>EMOTION JUMPER</b> Il cavo incluso permette la variazione della temperatura colore da bianco 'caldo' a 'freddo' (2700-6500K).
	<b>SMART SYSTEM</b> For the choice of control system go to page 268 272
	<b>MEC DRIVER</b> For the selection of the power supply system go to page 262 266



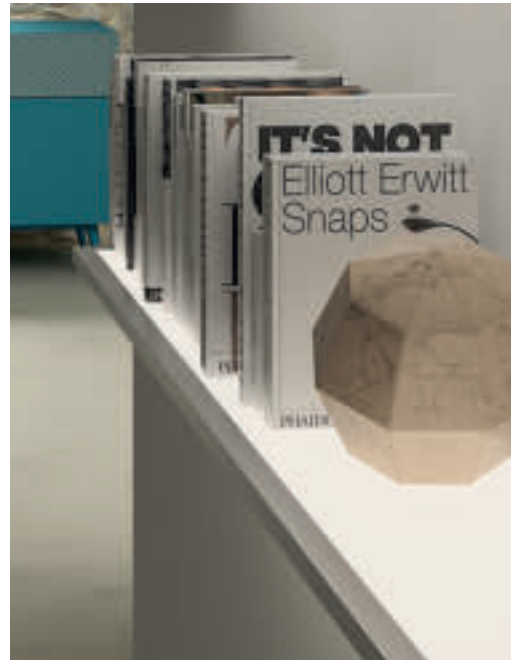


# Paper Shelf

## Lighting shelf

Paper Shelf is a luminous shelf with aluminium frame and polycarbonate diffuser: it has the dual function of furnishing and offering a pleasant double emission wall light. Wall mountable with screws and dowels (included), it has an On/Off switch and integrated drivers. The LED source is available with Natural (4000K) or Warm (3000K).




Paper Shelf

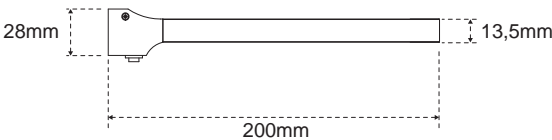

PAPERSHELF

	27500010300ANN	4,4 W	450 mm	4000K
	27500011200ANN			
	27500020300ANN	6,0 W	600 mm	4000K
	27500021200ANN			
	27500030300ANN	9,3 W	900 mm	4000K
	27500031200ANN			
	27500040300ANN	12,5 W	1200 mm	4000K
	27500041200ANN			

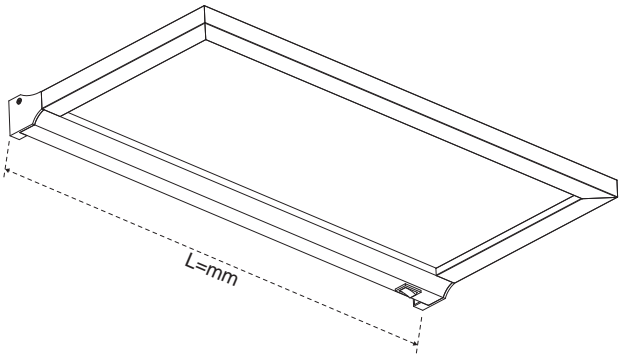



# Mirrors.

---





BESPOKE  
LIGHTING  
MIRRORS

—



230  
KORAL 1




231  
KORAL 2



232  
KURSAAL 1



233  
KURSAAL 2



234  
KURSAAL 3



236  
SCHEIN 1



237  
SCHEIN 2

STANDARD  
LIGHTING  
MIRRORS

—



238  
VISTA



240  
KRISTAL

MIRROR  
LAMPS

—



242  
IRIS \  
LILIUM



FOCUS ON

# Mirror light.

A PERFECT SYNTHESIS  
OF STYLE AND  
FUNCTIONALITY





With L&S, the mirror becomes the protagonist of the furniture. The line is distinguished by the elegance of the shapes proposed and by the wide range of customisation possibilities, which enable it to be inserted into the most diverse environments.

The integration of lights and speakers, the presence of touch controls, the choice of various finishes make L&S mirrors an optimal solution, capable of combining the best of design and technology into a single complement.



ANTI FOG



MUSIC



CONTROL



## Light diffusion

1 to 8 light sources, front, side, wall washer

## Emotion

Adjustable colour temperature from warm 2700K to cold 6500K

## Dimensions

Up to 1800 x 800 mm

## Touch controls

On/off, warm/cold light, anti-fog

## Shapes


Customisable both square and round

## Colour and finish

Brass, copper-plated bronze, anthracite



# Koral 1

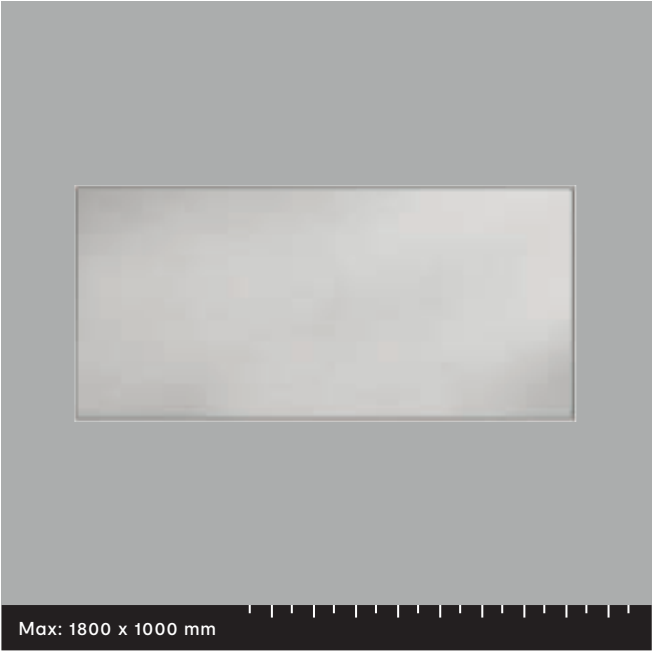

Emotion LED  
2700K-6000K



Touch  
On/Off  
Colour change




Anti fog



Music

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

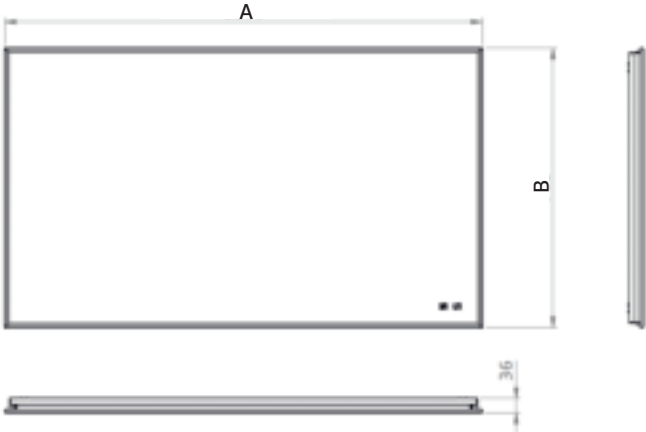


## KORAL 1

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-

## ACCESSORI

Anti fog
Music



## KORAL 1 WALLWASHER

600 x 800 mm	Emotion	31,2 W
900 x 800 mm	Emotion	38,4 W
1200 x 800 mm	Emotion	45,6 W
1500 x 800 mm	Emotion	52,8 W
1800 x 800 mm	Emotion	60 W

## ACCESSORI


Touch
Anti fog
Music



Wall Washer



# Koral 2

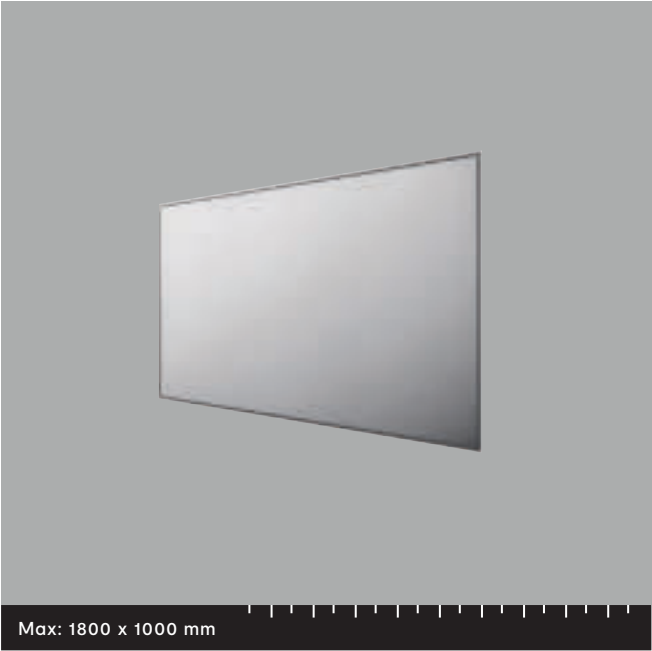

Emotion LED  
2700K-6000K



Touch  
On/Off  
Colour change




Anti fog



Music

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

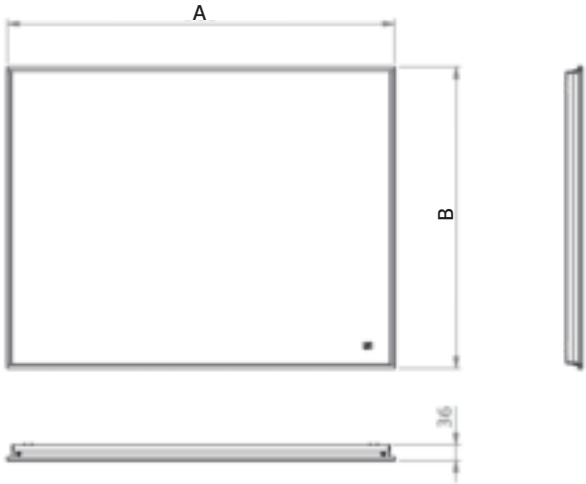


## KORAL 1

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-

## ACCESSORI

- Anti fog
- Music




## KORAL 1 WALLWASHER

600 x 800 mm	Emotion	31,2 W
900 x 800 mm	Emotion	38,4 W
1200 x 800 mm	Emotion	45,6 W
1500 x 800 mm	Emotion	52,8 W
1800 x 800 mm	Emotion	60 W

## ACCESSORI

- Touch
- Anti fog
- Music



Wall Washer



# Kursaal 1



Emotion LED  
2700K-6000K



Touch  
On/Off  
Colour change




Anti fog



Music

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

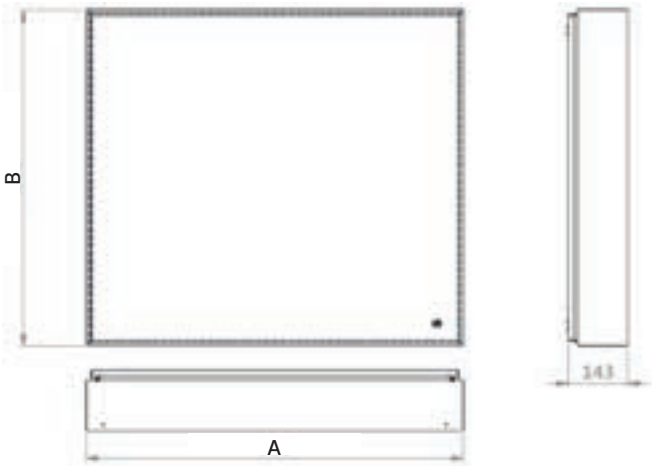


## KURSAAL 1

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-

## ACCESSORI

Anti fog
Music




## KURSAAL 1

600 x 800 mm	Emotion	6,6 W
900 x 800 mm	Emotion	10,2 W
1200 x 800 mm	Emotion	13,8 W
1500 x 800 mm	Emotion	17,4 W
1800 x 800 mm	Emotion	21 W

## ACCESSORI

Touch
Anti fog
Music




## KURSAAL 1 WALLWASHER

600 x 800 mm	Emotion	37,8 W
900 x 800 mm	Emotion	48,6 W
1200 x 800 mm	Emotion	59,4 W
1500 x 800 mm	Emotion	70,2 W
1800 x 800 mm	Emotion	81 W


## ACCESSORI

Touch
Anti fog
Music





# Kursaal 2

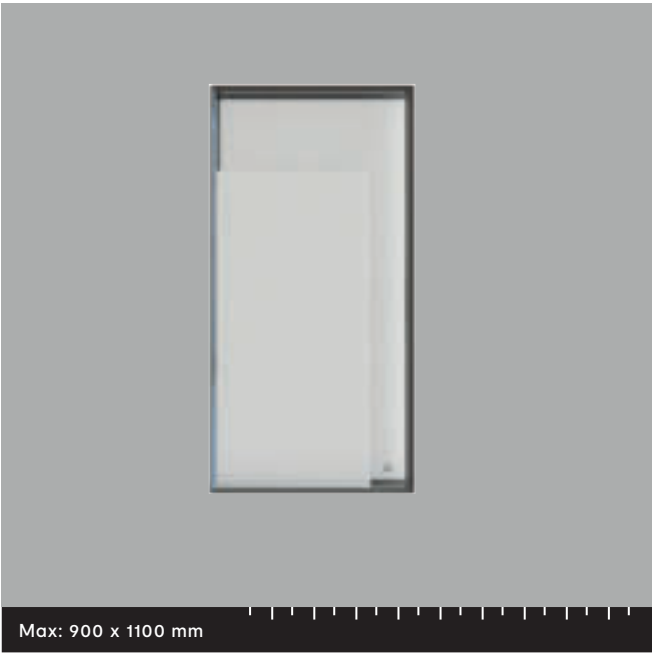


Emotion LED  
2700K-6000K



Touch  
On/Off  
Colour change

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

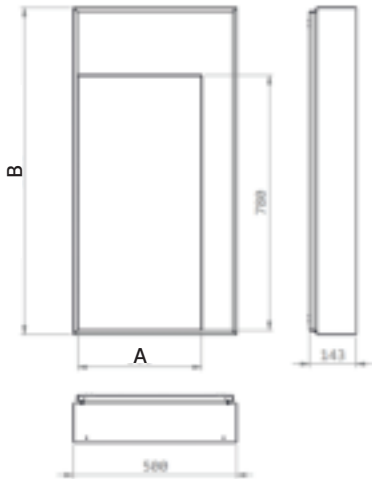

## KURSAAL 2

600 x 800 mm	-
600 x 1000 mm	-
900 x 1100 mm	-

## KURSAAL 2

600 x 800 mm	Emotion	12,3 W
600 x 1000 mm	Emotion	14,1 W
900 x 1100 mm	Emotion	15,9 W

## ACCESSORI




Touch
-------

## KURSAAL 2 WALLWASHER

600 x 800 mm	Emotion	43,5 W
600 x 1000 mm	Emotion	52,5 W
900 x 1100 mm	Emotion	61,5 W

## ACCESSORI

Touch
-------





# Kursaal 3



Emotion LED  
2700K-6000K




Touch  
On/Off  
Colour change



Music

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

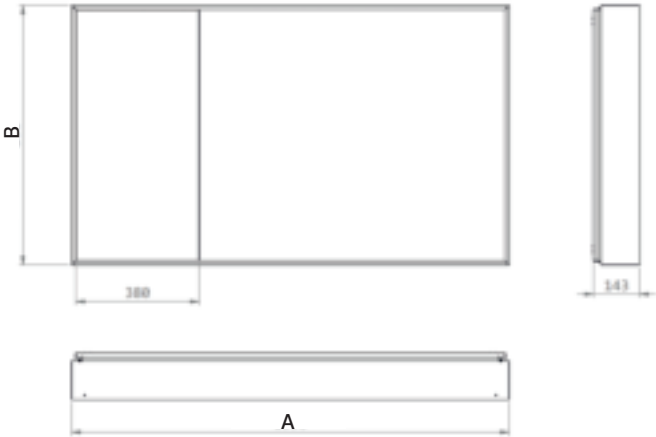


## KURSAAL 3

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-

## ACCESSORI

Anti fog  
Music




## KURSAAL 3

600 x 800 mm	Emotion	6,6 W
900 x 800 mm	Emotion	10,2 W
1200 x 800 mm	Emotion	13,8 W
1500 x 800 mm	Emotion	17,4 W
1800 x 800 mm	Emotion	21 W

## ACCESSORI

Touch  
Anti fog  
Music




## KURSAAL 3 WALLWASHER

600 x 800 mm	Emotion	37,8 W
900 x 800 mm	Emotion	48,6 W
1200 x 800 mm	Emotion	59,4 W
1500 x 800 mm	Emotion	70,2 W
1800 x 800 mm	Emotion	81 W

## ACCESSORI

Touch  
Anti fog  
Music










# Schein 1

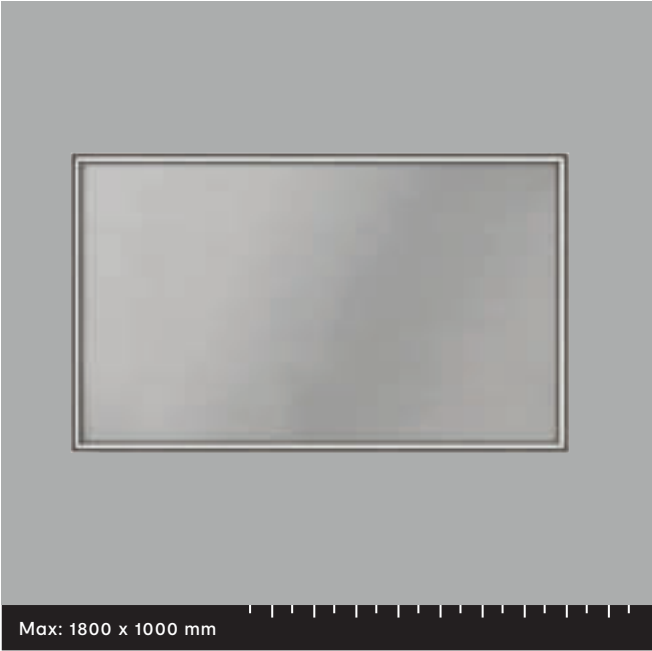

Emotion LED  
2700K-6000K




Touch  
On/Off  
Colour change



Anti fog

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

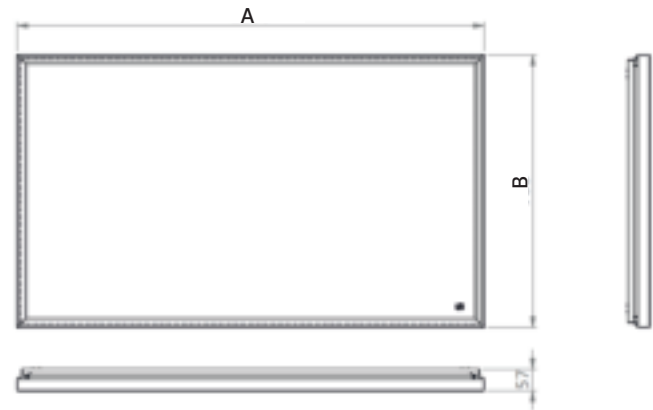


## SCHEIN 1

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-

## ACCESSORI

Anti fog




## SCHEIN 1

600 x 800 mm	Emotion	31,2 W
900 x 800 mm	Emotion	38,4 W
1200 x 800 mm	Emotion	45,6 W
1500 x 800 mm	Emotion	52,8 W
1800 x 800 mm	Emotion	60 W

## ACCESSORI

Touch

Anti fog




## SCHEIN 1 WALLWASHER

600 x 800 mm	Emotion	62,4 W
900 x 800 mm	Emotion	76,8 W
1200 x 800 mm	Emotion	91,2 W
1500 x 800 mm	Emotion	105,6 W
1800 x 800 mm	Emotion	120 W

## ACCESSORI


Touch

Anti fog





## Schein 2

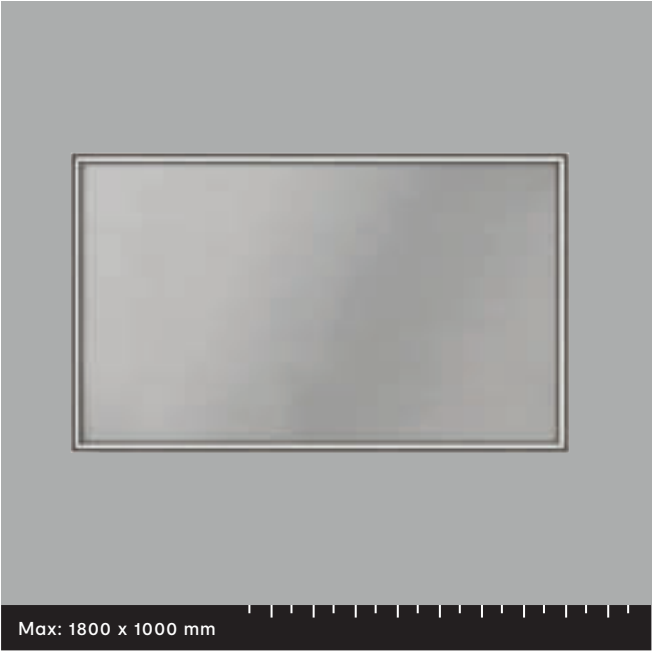


Emotion LED  
2700K-6000K




Touch  
On/Off  
Colour change

Mains	190-230 V AC
Finish	Anthracite - Copper - Brass
Protection	IP44
Insulation class	2
Certifications	CE

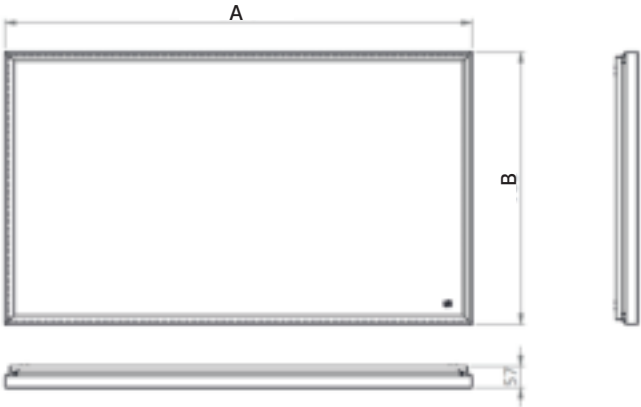

### SCHEIN 2

600 x 800 mm	-
900 x 800 mm	-
1200 x 800 mm	-
1500 x 800 mm	-
1800 x 800 mm	-




### SCHEIN 2

600 x 800 mm	Emotion	15,6 W
900 x 800 mm	Emotion	19,2 W
1200 x 800 mm	Emotion	42,8 W
1500 x 800 mm	Emotion	26,4 W
1800 x 800 mm	Emotion	30 W

### ACCESSORI

Touch
-------




### SCHEIN 2 WALLWASHER

600 x 800 mm	Emotion	46,8 W
900 x 800 mm	Emotion	57,6 W
1200 x 800 mm	Emotion	68,4 W
1500 x 800 mm	Emotion	79,2 W
1800 x 800 mm	Emotion	90 W

### ACCESSORI

Touch
-------







# Vista

## Lighting mirror

Elegant mirror with front light and wall-washer. Practical touch controls allow switching ON/OFF, changing colour temperature (in 3 steps), dim and anti-fog. The IP44 protection allows it to be installed in damp environments (eg bathrooms). The LED source is available in Emotion colour temperature which allows the variation in steps of 3000K, 4000K and 6500K.



Vista



Emotion LED  
2700K-6000K




Touch  
On/Off  
Colour change



Anti fog

Mains	190-230 V AC
Protection	IP44
Insulation class	2
Certifications	CE

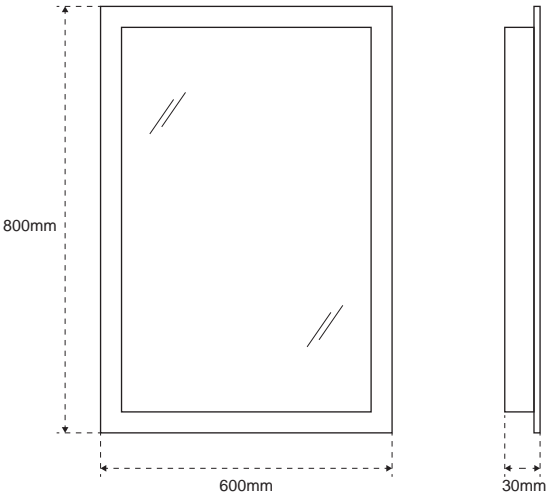


VISTA

29900020000ZE 45 W

ACCESSORI

Touch  
Anti fog



Luce frontale





Kristal Mono



Kristal Duo

# Kristal

## Lighting mirror

Elegant mirror with front light and wall-washer. Practical touch controls allow switching ON/OFF, changing colour temperature and anti-fog. Available in metallic grey, it can be easily installed both vertically and horizontally. The LED source is available in Emotion colour temperature which allows the variation from 2700K to 6500K.



# Kristal




Emotion LED  
2700K-6000K



Touch  
On/Off  
Colour change

Mains	190-230 V AC
Protection	IP44
Insulation class	2
Certifications	CE

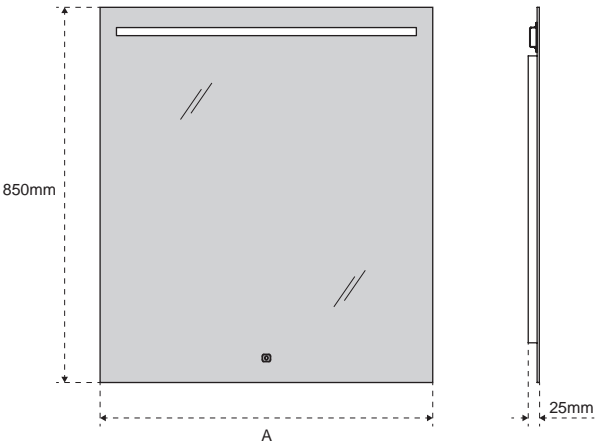


## KRISTAL MONO

600 x 850 mm	Emotion	6,6 W
800 x 850 mm	Emotion	9,0 W
900 x 850 mm	Emotion	10,2 W
1000 x 850 mm	Emotion	11,4 W
1200 x 850 mm	Emotion	13,8 W

## ACCESSORI

Touch




## KRISTAL DUO

600 x 850 mm	Emotion	19,2 W
800 x 850 mm	Emotion	19,2 W
900 x 850 mm	Emotion	19,2 W
1000 x 850 mm	Emotion	19,2 W
1200 x 850 mm	Emotion	19,2 W

## ACCESSORI

Touch







Iris 300 mm




Lilium 500 mm

# IRIS \ LILIUM


## Mirror lamp

Lilium is a mirror lamp in chrome-plated metal, with a diffused optic that guarantees excellent visual comfort. The integrated driver simplifies the installation considerably; the IP44 index guarantees the protection of the lamp from humidity and water splashes. The LED source has a Natural colour temperature (4000K) to guarantee the best light output.

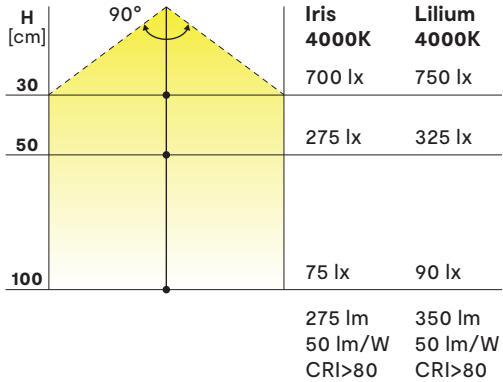



IRIS \ LILIUM

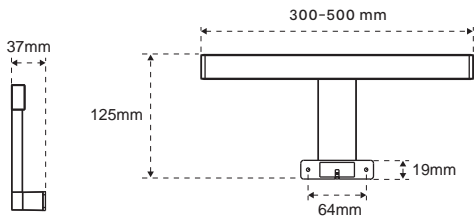

IRIS 230 V AC

	17900450902	5,5 W	300 mm	4000K
---	-------------	-------	--------	-------

LILIUM 230 V AC

	17900460902	7 W	500 mm	4000K
---	-------------	-----	--------	-------

IRIS EDC 12 V DC

	17900450901ZD	4 W	300 mm	4000K
---	---------------	-----	--------	-------

LILIUM EDC 12 V DC

	17900460901ZD	7 W	500 mm	4000K
---	---------------	-----	--------	-------

ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262



# LED Strips.

---





STRIP REEL



246  
STRIP REEL  
10 MM



247  
STRIP REEL  
5 MM



248  
STRIP REEL  
COB




249  
STRIP REEL  
EMOTION



250  
STRIP REEL  
RGB



251  
STRIP REEL  
RGBW




252  
MINI  
OCTOPUS



## Strip reel 10 mm



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Cold (6500K), Natural (4000K), Warm (3000K, 2700K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

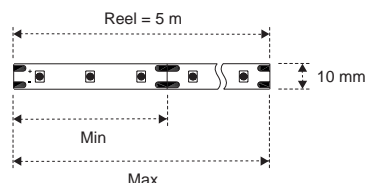

### STRIP REEL 12 V

	LEDs/m	W/m	L. Min \ Max	CCT
12807400001G_	72	7,8	42 mm \ 4,6 m	_C \ _N \ _W
12807410001C_	108	11,7	27,8 mm \ 3,1 m	_C \ _N \ _W
12807420001E_	156	16,9	19,2 mm \ 2,1 m	_C \ _N \ _W
12808490002AGD	120 + 120	13	25 mm \ 2,8 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.

L: 3 m  
12603960000



Extension from output cable to power supply 12 V

L: 1100 mm  
12604220000  
L: 2200 mm  
12604230000



Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)

L: 50 mm  
12605010000



Soft link lamp-to-lamp connection for both 12 V and 24 V.

L: 10 cm  
12603930000  
L: 40 cm  
12603940000  
L: 70 cm  
12603950000



Bridge connector for strip segments

19700450100



#### FIXED COLOUR TEMPERATURE

Add the suffix \_C for cold white (6500K), \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER

For the selection of the power supply system go to page 262

### STRIP REEL 24 V

	LEDs/m	W/m	L. Min \ Max	CCT
12808190001N_	72	7,8	84 mm \ 9,2 m	_C \ _N \ _W
12808180001M_	108	11,7	55,6 mm \ 6,2 m	_C \ _N \ _W
12807430001I_	156	16,9	38,4 mm \ 4,2 m	_C \ _N \ _W
12809490000NW	72	7,8	84 mm \ 9,2 m	2700K
12809690000MW	108	11,7	55,6 mm \ 6,2 m	2700K
12809700000IW	156	16,9	38,4 mm \ 4,2 m	2700K
12808860002AHD	120 + 120	13	50 mm \ 5,6 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.

L: 3 m  
12603920000



Extension from output cable to power supply 24 V

L: 1100 mm  
12604630000  
L: 2200 mm  
12604620000



Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version)

L: 50 mm  
12605020000



Soft link lamp-to-lamp connection for both 12 V and 24 V.

L: 10 cm  
12603930000  
L: 40 cm  
12603940000  
L: 70 cm  
12603950000



Bridge connector for strip segments

19700450100



#### FIXED COLOUR TEMPERATURE

Add the suffix \_C for cold white (6500K), \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



#### MEC DRIVER


For the selection of the power supply system go to page 262



## Strip reel 5 mm



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Micro Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 or 24 VDC, in various densities (LEDs/m) and with Natural (4000K), Warm (3000K) or Dual Colour Emotion colour temperature that allows the variation from 3000K to 4000K.

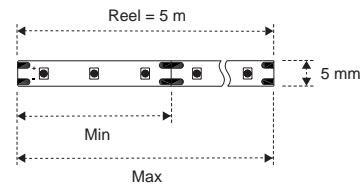

### STRIP REEL 12 V

	LEDs/m	W/m	L. Min \ Max	CCT
12810230000AN_	180	13	25 mm \ 2,8 m	_N \ _W
12809720000AUD	120 + 120	13	25 mm \ 2,8 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.  
L: 3 m  
**12606220000**



Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)  
L: 50 mm  
**12605010000**



Soft link lamp-to-lamp connection for both 12 V and 24 V.  
L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262

### STRIP REEL 24 V

	LEDs/m	W/m	L. Min \ Max	CCT
12810240000AM_	180	13	50 mm \ 5,6 m	_N \ _W
12809730000APD	120 + 120	13	50 mm \ 5,6 m	EDC

### CABLES AND CONNECTORS



Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.  
L: 3 m  
**12606230000**



Reversing the polarity of the connector changes colour from warm to natural (only for 24 V EDC version)  
L: 50 mm  
**12605020000**



Soft link lamp-to-lamp connection for both 12 V and 24 V.  
L: 10 cm  
**12606240000**  
L: 40 cm  
**12606250000**  
L: 70 cm  
**12606260000**



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**MEC DRIVER**  
For the selection of the power supply system go to page 262




# Strip reel COB



## STRIP REEL COB 12 V

	LEDs/m	W/m	L.	CCT
12810450000Z_	504	11	5 m	_N \ _W

Strip Reel COB is a line of 8 mm flexible printed circuits characterized by a high density of LED arrays, a feature that eliminates the point effect of the light emission, for a perfectly homogeneous result. Strip Reel COB is suitable for decorative lighting and can be integrated into the Mec and Micro Mec profiles. Supplied in 5 m sectionable rolls, they are available at 12 V and with a fixed colour temperature of 3000K or 4000K.

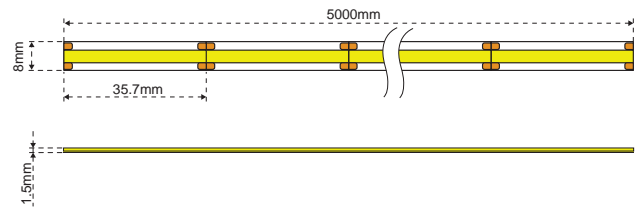




# Strip reel EMOTION



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Mec profiles. Supplied in 5 m sectionable coils, they are available in 12 VDC with Emotion colour temperature that allows the variation from 2700K to 6500K.

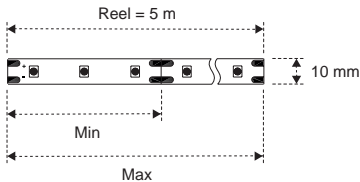

## STRIP REEL EMOTION 12 V

	LEDs/m	W/m	L. Min \ Max	CCT
12808300000FE	120 + 120	15,5	25 mm \ 2,3 m	Emotion

## CABLES AND CONNECTORS



	Power cable from lamp to 12 V power supply, includes two springs to join the pieces without welding.	L: 3 m 12603960000
	Extension from output cable to power supply 12 V	L: 1100 mm 12604220000 L: 2200 mm 12604230000
	Reversing the polarity of the connector changes colour from warm to natural (only for 12 V EDC version)	L: 50 mm 12605010000
	Soft link lamp-to-lamp connection for both 12 V and 24 V.	L: 10 cm 12603930000 L: 40 cm 12603940000 L: 70 cm 12603950000
	Bridge connector for strip segments	19700450100
	<b>MEC DRIVER</b> For the selection of the power supply system go to page 262	



# Strip reel RGB



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Meccano profiles. Supplied in 5 m sectionable coils, they are available in 24 VDC. The Strip Reel RGB allows fading from red, green and blue colours.

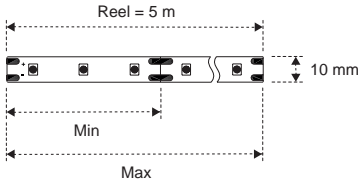


## STRIP REEL RGB 24 V

	LEDs/m	W/m	L. Min \ Max	CCT
1280848000AIR	60	13	100 mm \ 5 m	RGB

## CABLES AND CONNECTORS

	Power cable from lamp to 24 V power supply, includes two springs to join the pieces without welding.	L: 3 m 12605220100
	Distributor Mec Driver RGB 24 V	12607580100
	Mec Driver Blue Smart module	24201780100
	<b>MEC DRIVER</b> For the selection of the power supply system go to page 262	

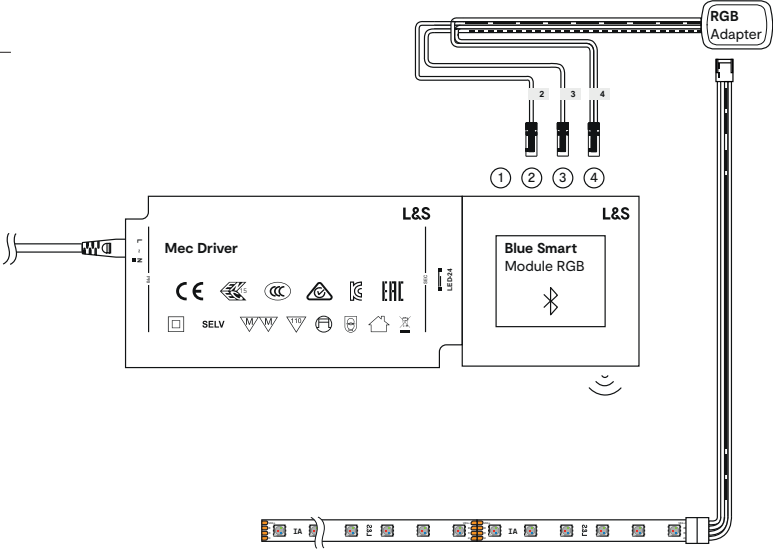

Remote Smart 1 RGB



Remote Smart 4 RGB




L&S Mobile App



Strip reel RGBW



Strip Reel is a line of flexible printed circuit boards suitable for decorative lighting and integration with Meccano profiles. Supplied in 5 m sectionable coils, they are available in 24 VDC. The Strip Reel RGBW allows fading from natural or warm white temperature and red, green and blue colours.


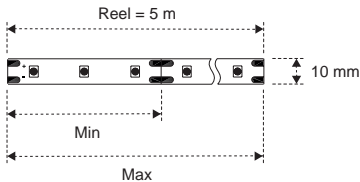


STRIP REEL RGBW 24 V


	LEDs/m	W/m	L. Min \ Max	CCT
13110240000AQR	60	18,6	100 mm \ 5 m	RGB + NW
13110240000ARR	60	18,6	100 mm \ 5 m	RGB + WW

CABLES AND CONNECTORS

	Multiple connection cable*	L: 3 m 12607340000
	Mec Driver Blue Smart module	24201780100
	<b>MEC DRIVER</b> For the selection of the power supply system go to page 262	

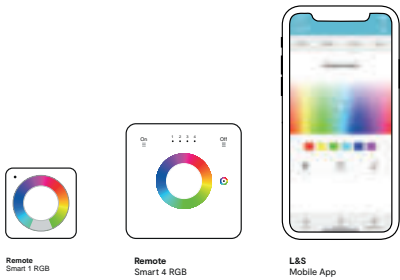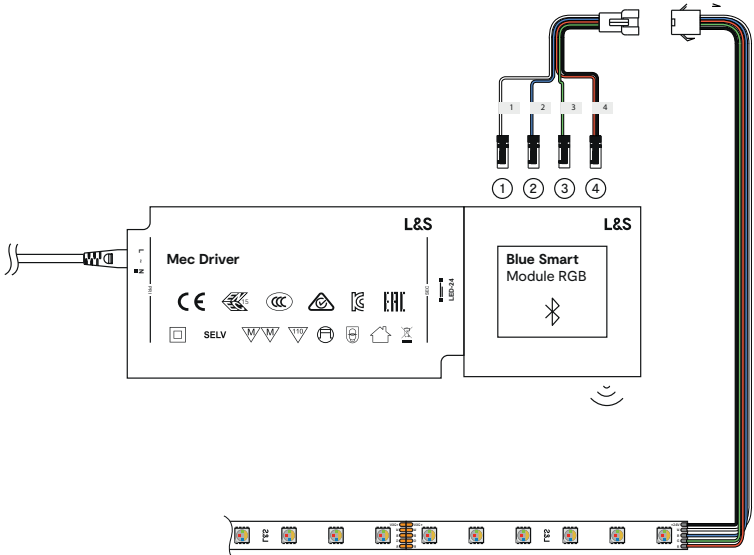




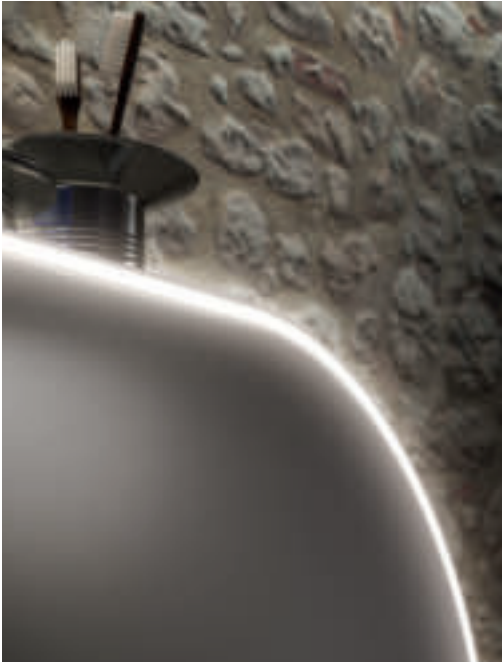

# Mini Octopus


## Flexible profile

Flexible recessed or surface mounted LED Strip with special fixing clips (not included) for maximum flexibility creating a variety of shapes, thanks also to the only 4mm width. Available also with an IP65 protection, it can be installed in damp environments (eg bathroom). Available in three lengths (1, 3, 6m), it can be cut every 25mm. The LED source is available in Natural (4000K), Warm (3000K) or Emotion Dual Colour colour temperature, which allows the variation from 3000K to 4000K.

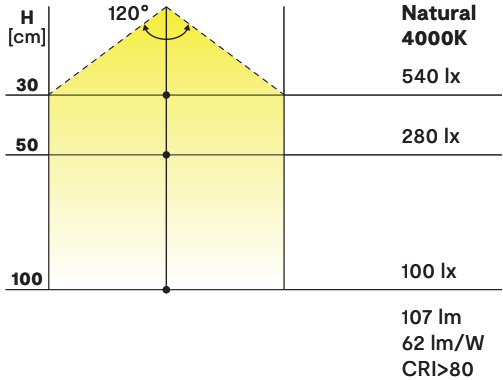



## Mini Octopus

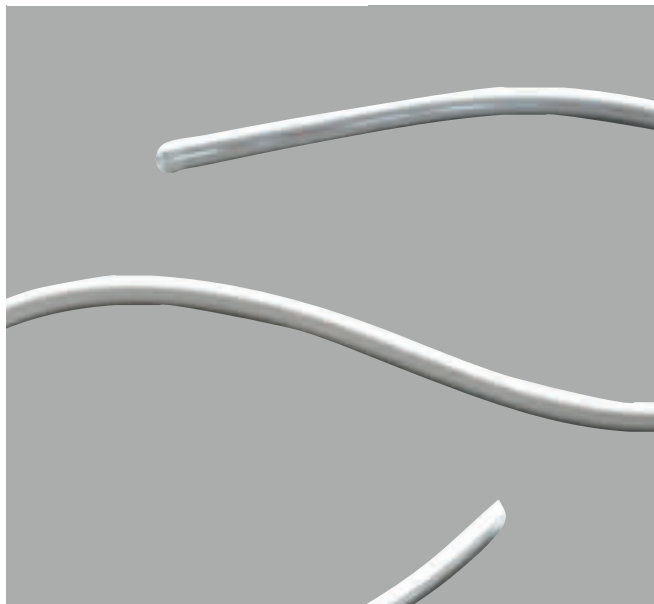

### MINI OCTOPUS EDC 12 V

29000010101ZD	1 m	10 W	1 input	3000-4000K
29000020101ZD	3 m	30 W	2 input	3000-4000K
29000030101ZD	6 m	60 W	2 input	3000-4000K

### MINI OCTOPUS EDC 24 V

29000300100ZD	1 m	10 W	2 input	3000-4000K
29000310100ZD	3 m	30 W	2 input	3000-4000K
29000320100ZD	6 m	60 W	2 input	3000-4000K


### MINI OCTOPUS 12 V

29000010101Z_	1 m	8 W	1 input	_N \ _W
29000020101Z_	3 m	24 W	2 input	_N \ _W
29000030101Z_	6 m	48 W	2 input	_N \ _W

### MINI OCTOPUS 24 V

29000300101Z_	1 m	8 W	1 input	_N \ _W
29000310101Z_	3 m	24 W	2 input	_N \ _W
29000320101Z_	6 m	48 W	2 input	_N \ _W


### FIXING ACCESSORIES




**13200310000**  
15 brackets for surface installation



**13201950000**  
3 brackets for protruding installation




**INCLUDED**  
3 m power cable (one each exit)



**13300821000**  
Profile for installation under the plinth

Dimensione Fresata /  
Drill Dimension /  
Ausmaß der Fräsarbeit /  
Medida del corte /  
Mesures fraise




\* Connection cord L=3m INCLUDED




**A** Kit for surface mounting  
x15 x15

**B** Kit for surface mounting  
x3 x6

**C** Profile for surface mounting



### ACCESSORIES AND CONTROL



**EMOTION JUMPER**  
The included cable allows for colour temperature variation from 'warm' to 'natural' white (3000-4000K).



**SMART SYSTEM**  
For the choice of control system go to page 268



**MEC DRIVER**  
For the selection of the power supply system go to page 262

### ACCESSORIES AND CONTROL



**FIXED COLOUR TEMPERATURE**  
Add the suffix \_N for natural white (4000K) or \_W for warm white (3000K) to the product code



**SMART SYSTEM**  
For the choice of control system go to page 268




**MEC DRIVER**  
For the selection of the power supply system go to page 262



# Power supplies and control systems.

---

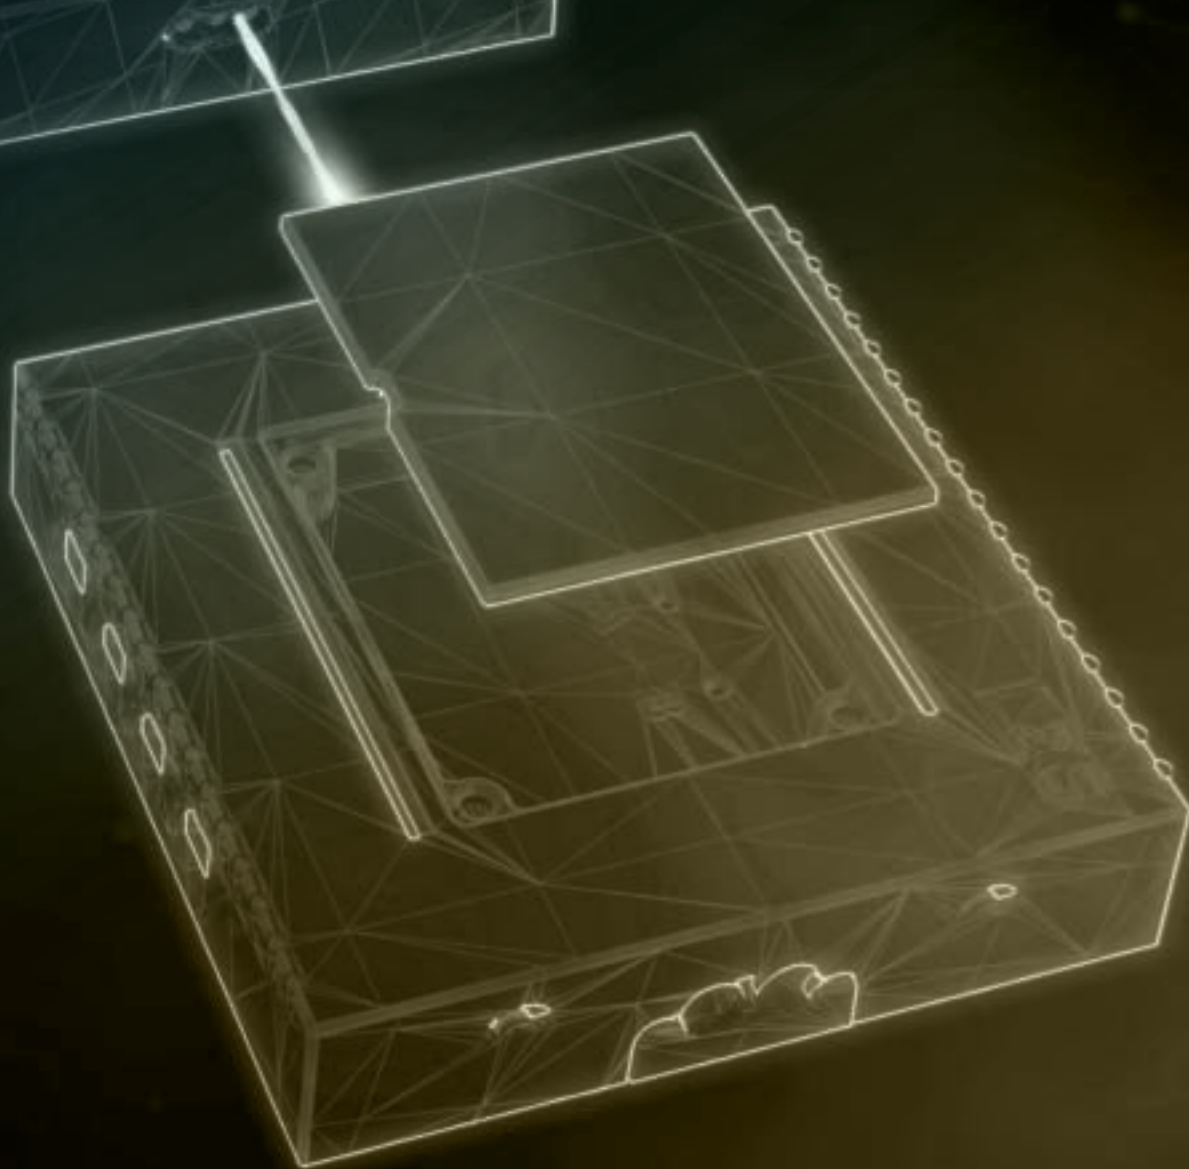




**POWER  
SUPPLIES**

—



**262  
MEC DRIVER**



**262  
DISTRIBUTOR**



**263  
MODULES**

**CONTROL  
SYSTEMS**

—



**268  
SMART  
CONTROLLER**




**270  
IR DOOR  
TUBE**



**271  
IR DC/DC**



**272  
R-TOUCH**



**272  
TOUCH DIM  
CONTROL**



**273  
KIT SENSOR**




**273  
RADIO  
SWITCH**

**ACCESSORIES**

—



**274  
SLIMFIT**



**276  
CANALINA  
PASSACAVI**



**276  
PROLUNGA**




**277  
CORNER  
MULTISOCKET**



**279  
TOKI**



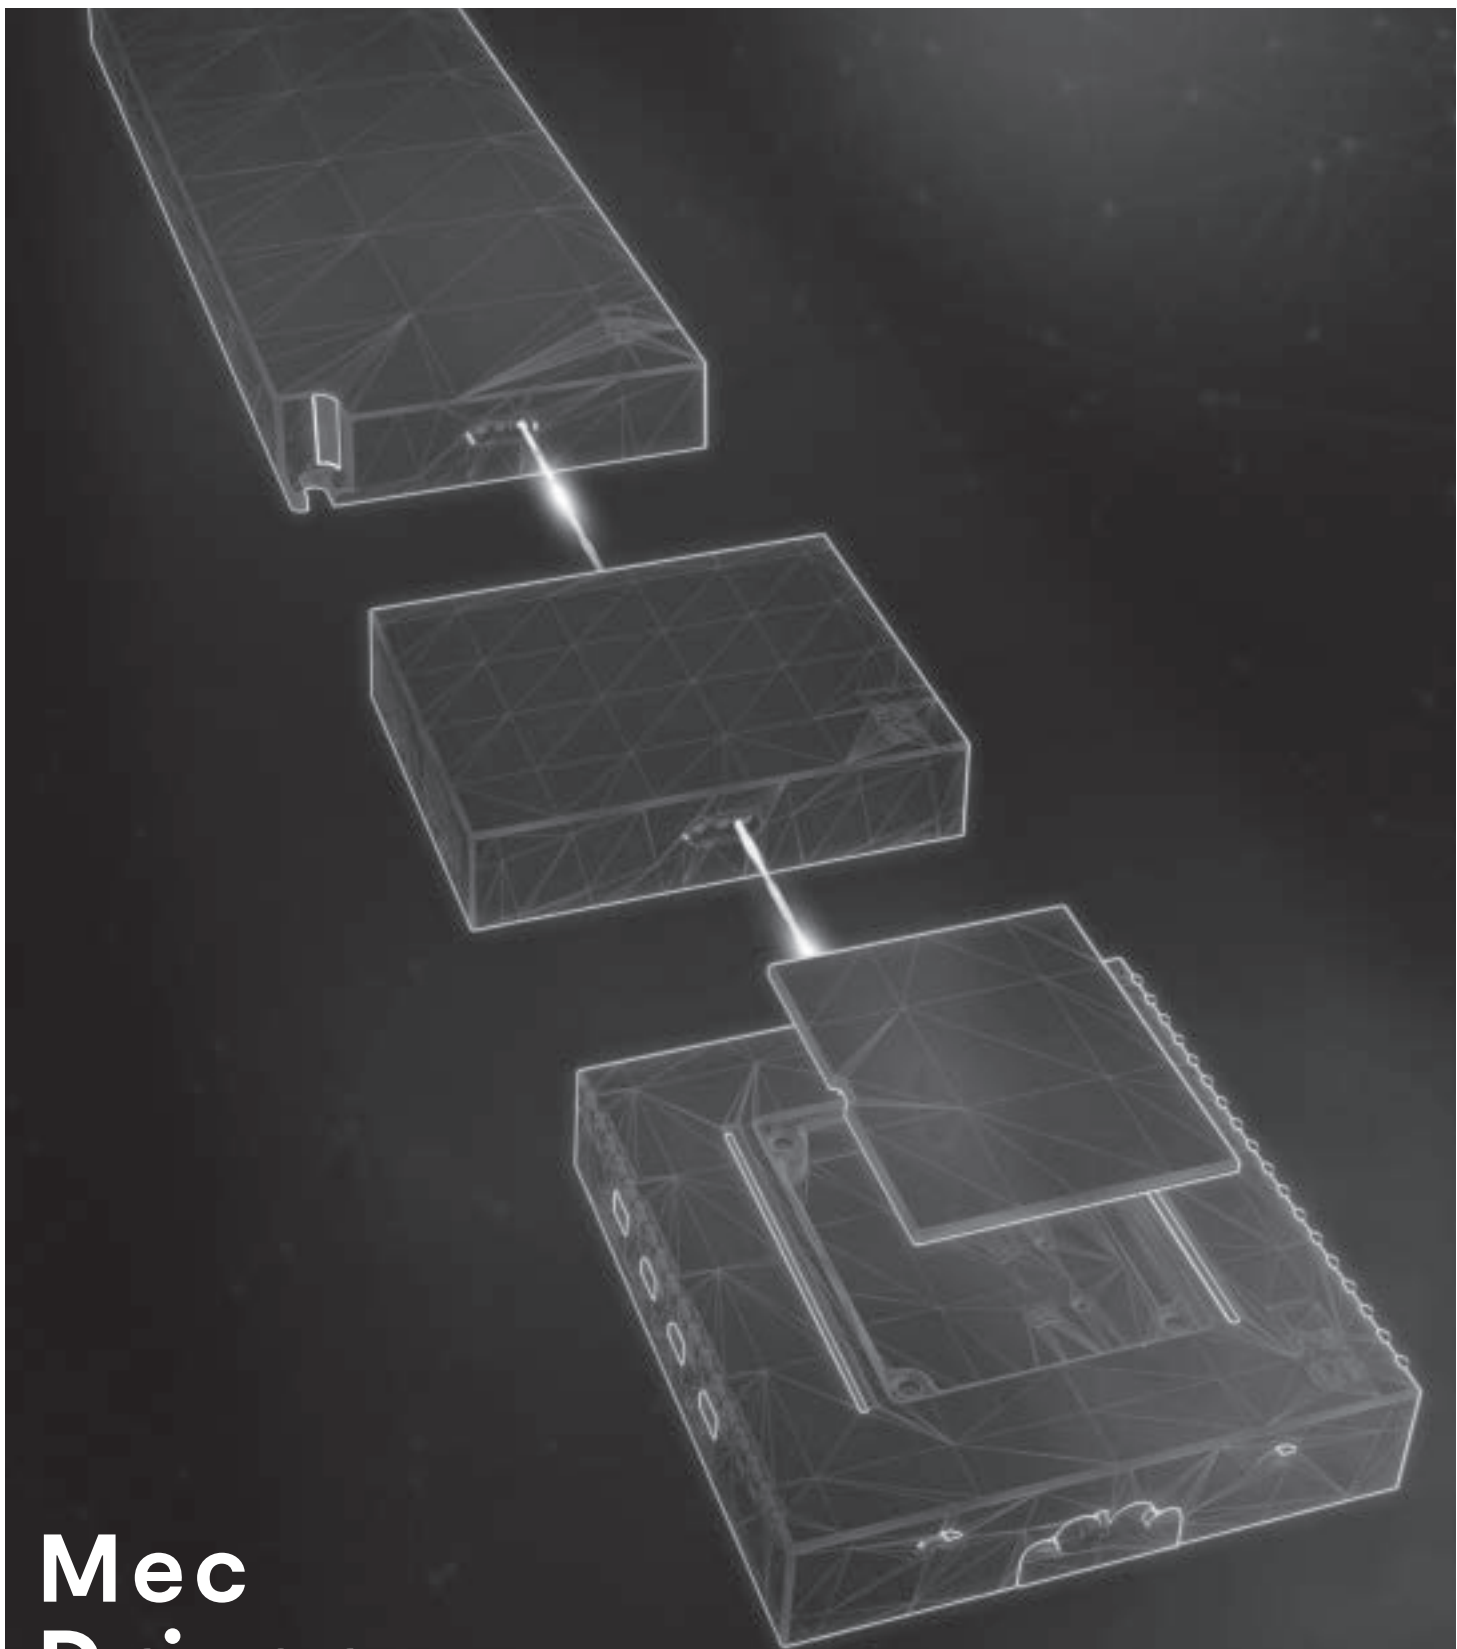

# Mec Driver

**4 power supplies in 1,  
with integrated control systems**

More flexibility to connect the future



# ONE DRIVER, INFINITE SOLUTIONS

## MEC DRIVER REVOLUTIONISES THE WORLD OF LED LIGHTING

It is now possible to build a modular power supply system for lighting and home automation, ready and certified for almost every market in the world.

The core of the system is the new multi-voltage power supply available in 6 different wattages (18, 36, 48, 60-72, 90, 120 W) and modular with all major sockets. Modules can be connected to it to remotely control all lighting, sound and home automation functions. This provides a complete control solution with a small footprint.



INTERACTIVE PRESENTATION

## ONE DRIVER, INFINITE SOLUTIONS BOTH 12 AND 24 VDC



OPERATES ON BOTH 12VDC AND 24VDC



TYPES OF MODULES AVAILABLE



**MULTIVOLTAGE**

Input: 100\240V AC Output: 12\24V DC




INTERNATIONAL CERTIFICATIONS



**REMOTE CONTROL**

Via Wi-fi, Radio Frequency (R.F.), Bluetooth, wired sensors

## Mec Driver

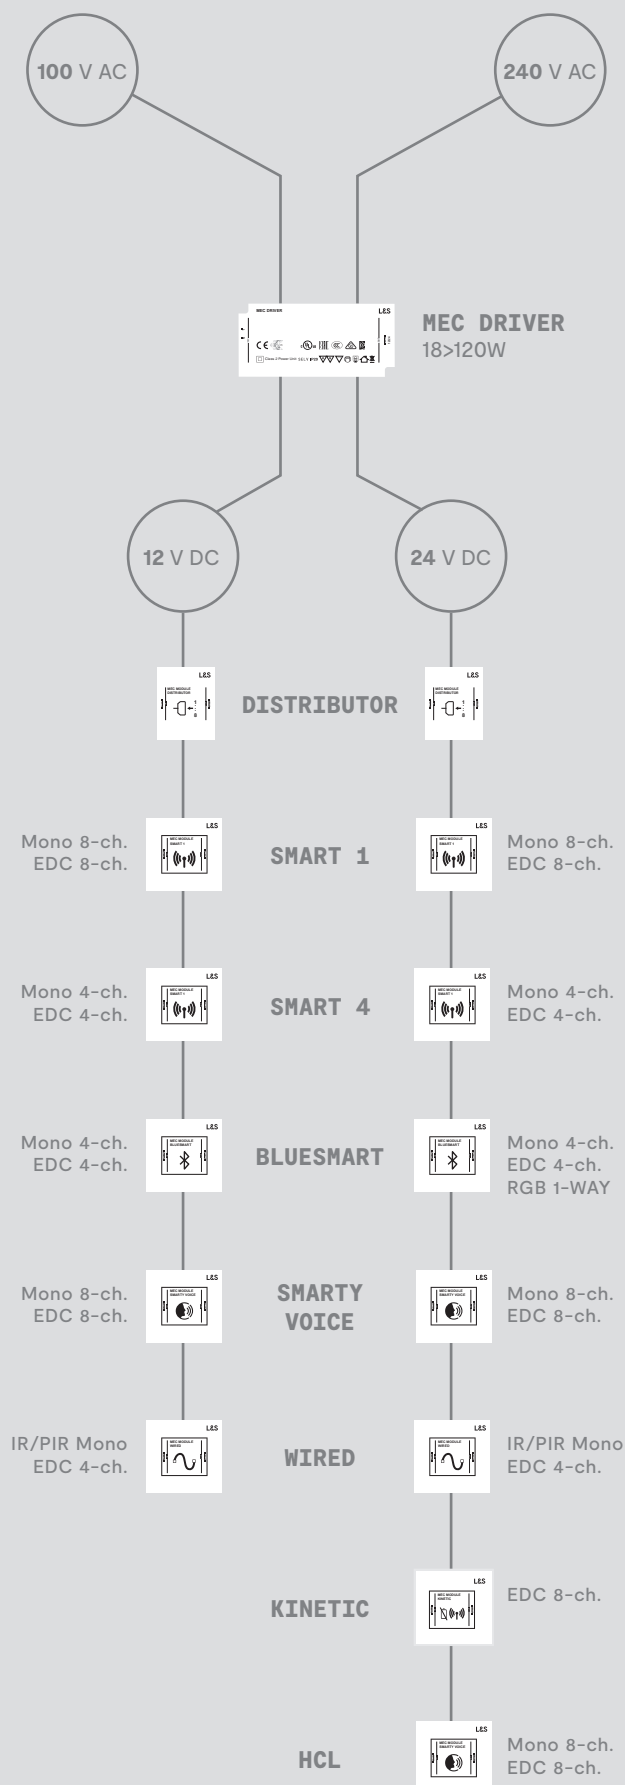



## Scenario 1

I choose first how to control the lights, then the driver to be associated

- 1** How do you want to control the available lights?



### MODULES

\	Connect only lights with or without on-board controls	Distributor
\	Control lights via external controls and sensors for ON-OFF, dimmer and colour management functions	Smart 1 and Smart 4
\	Control lights via mobile phone and/or external controls and sensors for ON-OFF, dimmer and colour management functions	Bluesmart
\	Control lights via voice commands and/or external commands and sensors for ON-OFF, dimmer and colour management functions	Smarty Voice
\	Control lights via wired controls and sensors for ON-OFF functions	Wired (IE and PIR)
\	Listening to music via mobile phone	Smart Music

- 2** How many lamps should be connected to one module?



### NO. OF INPUTS

\	Less than 2 lamps	All modules
\	Between 3 and 4 lamps	All modules except Y-cable
\	More than 4 lamps controlled simultaneously (up to 8 inputs)	Distributor, Smart 1 and Smarty Voice
\	More than 4 lamps controlled separately (up to No. 4 inputs)	Smart 4, Bluesmart

#### NOTE 1

All modules can be connected in a continuous row until the maximum load of the driver to which they are connected has been reached

#### NOTE 2

Light panels may require multiple inputs per model

- 3** What power (W) and voltage (12-24VDC) do the lamps to be connected have?



### DRIVER

\	MAX 18 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 36 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 48 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	Driver MAX 60 W @12 V DC \ MAX 72 W @24 V DC 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 90 W driver 100-240 V AC	Operates at 24 V DC
\	MAX 120 W driver 100-240 V AC	Operates at 24 V DC

- 4** What type of plug do you want to use?



### SPINE + CONTINUOUS WIRE

\	English	GB	
\	Chinese	CN	
\	Australian	AU	
\	Americana	US	
\	European	EU	
\	Korean	KR	

#### NOTE

For several drivers to be connected to one wall socket, the "Daisy Chain" continuous row connection module is available



## Scenario 2

I have already chosen the lamps, I need a driver to power them

- 1** What power (W) and voltage (12-24VDC) do the lamps to be connected have?



**DRIVER**

\	MAX 18 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 36 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 48 W driver 100-240 V AC	Operates at 12 and 24 V DC
\	Driver MAX 60 W @12 V DC \ MAX 72 W @24 V DC 100-240 V AC	Operates at 12 and 24 V DC
\	MAX 90 W driver 100-240 V AC	Operates at 24 V DC
\	MAX 120 W driver 100-240 V AC	Operates at 24 V DC

- 2** What type of plug do you want to use?



**SPINE +  
CONTINUOUS WIRE**

\	English	GB	
\	Chinese	CN	
\	Australian	AU	
\	Americana	US	
\	European	EU	
\	Korean	KR	

**NOTE**

For several drivers to be connected to one wall socket, the "Daisy Chain" continuous row connection module is available

- 3** How many lamps should be connected to one module?



**NO. OF INPUTS**

\	Less than 2 lamps	All modules
\	Between 3 and 4 lamps	All modules except Y-cable
\	More than 4 lamps controlled simultaneously (up to 8 inputs)	Distributor, Smart 1 and Smarty Voice
\	More than 4 lamps controlled separately (up to No. 4 inputs)	Smart 4, Bluesmart

**NOTE 1**

All modules can be connected in a continuous row until the maximum load of the driver to which they are connected has been reached

**NOTE 2**

Light panels may require multiple inputs per model

- 4** How do you want to control the available lights?



**MODULES**

\	Connect only lights with or without on-board controls	Distributor
\	Control lights via external controls and sensors for ON-OFF, dimmer and colour management functions	Smart 1 and Smart 4
\	Control lights via mobile phone and/or external controls and sensors for ON-OFF, dimmer and colour management functions	Bluesmart
\	Control lights via voice commands and/or external commands and sensors for ON-OFF, dimmer and colour management functions	Smarty Voice
\	Control lights via wired controls and sensors for ON-OFF functions	Wired (IE and PIR)
\	Listening to music via mobile phone	Smart Music




## Configuration examples

### Standard

#### MEC DRIVER + DISTRIBUTOR MODULE

The ballast module, connected to the mains with the power cable and combined with the distributor module, allows control of up to 8 lamps.

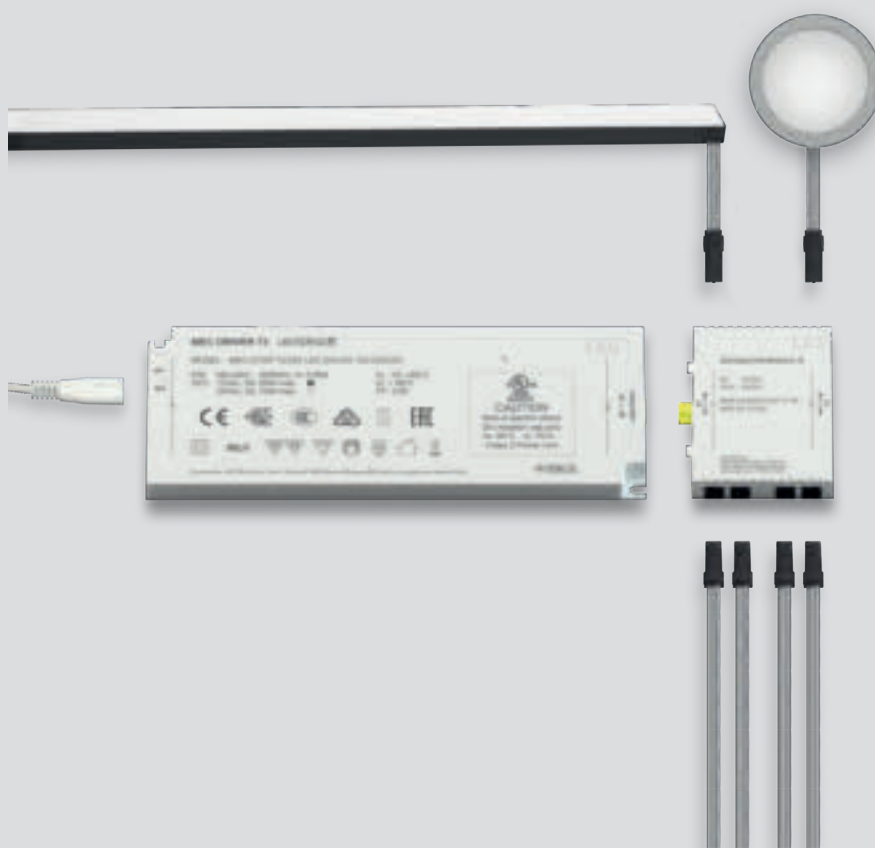

### Advanced

#### MEC DRIVER + BLUESMART MODULE

The power supply module, connected to the mains with the power cable and combined with the Bluesmart module, allows you to control up to 4 lamps remotely via the proposed controllers or directly from your smartphone with the appropriate app.






Modules Mec Driver		Out		N.out	Light source			Compatibility
		<div><div>12 VDC</div><div>24 VDC</div></div>			<div><div><div>Warm</div><div>Natural</div><div>Cold</div><div>White</div></div></div> <div><div>&amp;</div></div> <div><div>⌚</div></div> <div><div>RGB</div></div>			
Power supply								
<div>Power supply</div> <div><div><div>· 12 and 24 V DC</div><div>· Multi certificate</div><div>· Thickness 16 mm</div><div>· Different power cables</div></div></div> <div></div>	18 W	12 V	24 V					<div></div> <div>Input</div> <div>100-240 V AC</div>
	36 W	12 V	24 V					
	48 W	12 V	24 V					
	60 W	12 V						
	72 W		24 V					
	90 W		24 V					
	120 W		24 V					
Distribution								
<div>Distributor</div> <div><div>· Lamp connection with or without on-board controller</div></div> <div><div></div><div></div></div>	Y-cable	12 V	24 V	2	Mono	EDC	Emotion	
	Module	12 V	24 V	8	Mono	EDC	Emotion	
Control								
<div>Smart 1</div> <div><div>· Lamp connection</div><div>· Remote control</div><div>· Radiofrequency</div></div> <div></div>	Mono	12 V	24 V	8	Mono			<div><div></div><div></div></div>
	EDC	12 V	24 V	8		EDC	Emotion	<div><div></div><div></div><div></div></div>
<div>Smart 4</div> <div><div>· Lamp connection</div><div>· Remote control</div><div>· Radiofrequency</div></div> <div></div>	Mono	12 V	24 V	4 indep.	Mono			<div><div></div><div></div></div>
	EDC	12 V	24 V	4 indep.		EDC	Emotion	<div><div></div><div></div><div></div></div>
<div>Bluesmart</div> <div><div>· Lamp connection</div><div>· Remote control</div><div>· Bluetooth</div><div>· Radiofrequency</div></div> <div></div>	Mono	12 V	24 V	4 indep.	Mono			<div><div></div><div></div><div></div></div>
	EDC	12 V	24 V	4 indep.		EDC	Emotion	<div><div></div><div></div><div></div><div></div></div>
	RGB		24 V	1			RGB	<div><div></div><div></div><div></div><div></div></div>
<div>Smarty Voice</div> <div><div>· Lamp connection</div><div>· Remote control</div><div>· Voice commands</div><div>· Radiofrequency</div></div> <div></div>	Mono	12 V	24 V	8	Mono			<div><div></div><div></div><div></div><div></div></div>
	EDC	12 V	24 V	8		EDC	Emotion	<div><div></div><div></div><div></div><div></div><div></div></div>
<div>Smarty HCL</div> <div><div>· Lamp connection</div><div>· HCL remote control</div><div>· Voice commands</div><div>· Radiofrequency</div></div> <div></div>	Emotion	12 V	24 V	8		EDC	Emotion	<div><div></div><div></div><div></div><div></div><div></div></div>
<div>Wired</div> <div><div>· Lamp connection</div><div>· Wired controls</div></div> <div></div>	IR	12 V	24 V	4 indep.	Mono			<div><div></div><div></div><div>No dim</div></div>
	PIR	12 V	24 V	4 indep.	Mono			<div><div></div><div></div><div></div><div>No dim</div></div>
<div>Kinetic</div> <div><div>· Lamp connection</div><div>· Piezoelectric</div></div> <div></div>	EDC Emotion	12 V	24 V	8		EDC	Emotion	<div><div></div><div></div><div></div></div>
<div>Smart Music</div> <div><div>· Lamp connection</div><div>· Audio control</div></div> <div></div>			24 V					<div><div></div><div></div></div>



## Mec Driver

### POWER SUPPLY MODULE




MEC DRIVER POT.	INPUT	OUTPUT	DIMENSIONS
12591340100	18 W	100-240 V AC 12-24 V DC	110 x 75 mm
12591350100	36 W	100-240 V AC 12-24 V DC	160 x 75 mm
12591360100	48 W	100-240 V AC 12-24 V DC	160 x 75 mm
12591370100	60 W	100-240 V AC 12 V DC	210 x 75 mm
	72 W	100-240 V AC 24 V DC	
12591380100	90 W	100-240 V AC 24 V DC	210 x 75 mm
12591390100	120 W	100-240 V AC 24 V DC	210 x 75 mm

The power supply module is the beating heart of the Mec Driver system. Available in six power ratings, it can be combined with both 12 and 24 V distribution and control modules, which can be plugged in to enable you to manage your lighting system.

## Distributor

### Y-CABLE

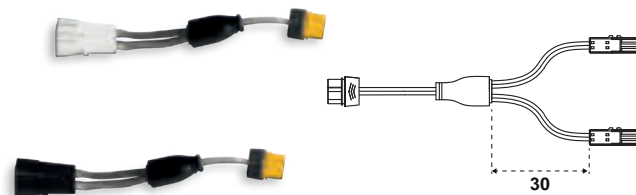


Y-CABLE	INPUT	WAYS	OUTPUT
12606830000	12 V DC	2	Max 18 W - 2 A total output
12606840000	24 V DC	2	Max 48 W - 2 A total output

The Y-cable, available in 12 or 24VDC versions, allows two lamps to be connected directly to the supply module.

## Mec Driver

### POWER CABLE




CABLE	SPINA	TYPE	INPUT	DIMENSION
12606660100		GB	100-240 V AC	2 m
12606670100		CN	100-240 V AC	2 m
12606680100		AU	100-240 V AC	2 m
12606690100		US	100-240 V AC	2 m
12606710100		EU	100-240 V AC	2 m
12606720100		KR	100-240 V AC	2 m

The power supply module supports an input voltage of 100-240 V AC, for use on a global scale; power cables, sold separately, enable you to choose the right plug type for your market.

## Distributor

### MODULE




DISTRIBUTOR	INPUT	WAYS	OUTPUT
24600130100	12 V DC	8	Max 5 A tot. max 3 A/out.
24600140100	24 V DC	8	Max 5 A tot. max 3 A/out.

The distributor module, available in 12 V or 24 V versions, enables up to 8 lamps to be connected to the ballast module. The modules can be integrated with other distribution or control modules as long as the same output voltage is maintained. The distributor modules are compatible with mono, EDC or Emotion lamps.



Smart 1  
MODULE



SMART 1	TYPE	IN.	WAYS	OUTPUT
24201850100	Mono	12 V DC	8	Max 5 A tot. max 3 A/out.
24201860100	EDC	12 V DC	8	Max 5 A tot. max 3 A/out.
24201870100	Mono	24 V DC	8	Max 5 A tot. max 3 A/out.
24201880100	EDC	24 V DC	8	Max 5 A tot. max 3 A/out.

The Smart 1 module allows simultaneous control of up to 8 lamps with the Smart 1 Controller, Smart Touch, Smart Ghost, Smart Sensor, Smart Switch and Smart Gateway. Available in 12 V or 24 V versions, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

SMART 1 CONTROLLERS




SMART SENSORS & CONTROLLERS



Each controller and sensor in the Smart line can control up to 6 modules.

Smart 4  
MODULE



SMART 4	TYPE	IN.	WAYS	OUTPUT
24201890100	Mono	12 V DC	4	Max 5 A tot. max 3 A/out.
24201900100	EDC	12 V DC	4	Max 5 A tot. max 3 A/out.
24201910100	Mono	24 V DC	4	Max 5 A tot. max 3 A/out.
24201920100	EDC	24 V DC	4	Max 5 A tot. max 3 A/out.

The Smart 4 module allows individual control of up to 4 lamps with the remote controls of the Smart 4 line, Smart Touch, Smart Ghost, Smart Sensor, Smart Switch and Smart Gateway. Available in 12 V or 24 V versions, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

SMART 4 CONTROLLERS




SMART SENSORS & CONTROLLERS



Each controller and sensor in the Smart line can control up to 6 modules.



## Bluesmart MODULE



### BLUESMART TYPE IN. WAYS OUTPUT

24201740100	Mono	12 V DC	4	Max 5 A tot. max 3 A/out.
24201750100	EDC	12 V DC	4	Max 5 A tot. max 3 A/out.
24201760100	Mono	24 V DC	4	Max 5 A tot. max 3 A/out.
24201770100	EDC	24 V DC	4	Max 5 A tot. max 3 A/out.
24201780100	RGB	24 V DC	1	Max 5 A tot. max 3 A/out.
12607580100	RGB	Distributor adapter		
12607340000	RGBW	Adapter cable		

The Bluesmart module allows individual control of up to 4 lamps via the Bluesmart app, which can be downloaded free of charge from the App Store and Google Play. The Bluesmart module is also compatible with remote controls from the Smart 4, Smart Touch, Smart Ghost, Smart Sensor, Smart Switch and Smart Gateway ranges. Available in 12 V or 24 V versions, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

#### SMART 1 CONTROLLERS



Smart 1 EDC



Smart 1 MONO

#### SMART 4 CONTROLLERS



Smart 4 EDC Round



Smart 4 MONO



Smart 4 RGB

#### SMART SENSORS & CONTROLLERS



Smart Touch



Smart Ghost



Smart Sensor



Smart Sensor



Smart Sensor O



Smart Switch




Smart Gateway

Each controller and sensor in the Smart line can control up to 6 modules.

## Mobile app

### DEVICE SETTING

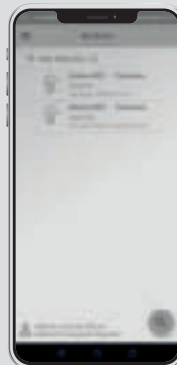


Displays connected devices in zones.

### SWITCH MODE



Enables individual zones to be selected, switched on or off.

### DIMMER MODE

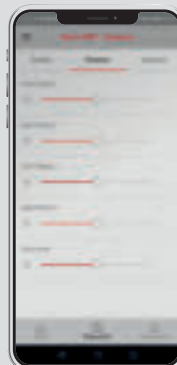

Enables you to adjust the light intensity of each individual lamp.

### SCENARIO MODE



Up to 4 different scenarios can be managed and configured with preferred settings.

### WHITE MODE



In EDC versions, it enables you to select the colour temperature of each individual lamp.

### RGB MODE



In RGB versions, it enables you to select the colour shade of each individual lamp.




Download on the  
App Store



ANDROID APP ON  
Google Play



## Smarty Voice MODULE



SMARTY V.	TYPE	IN.	WAYS	OUTPUT
24201810100	Mono	12 V DC	8	Max 5 A tot. max 3 A/out.
24201820100	EDC	12 V DC	8	Max 5 A tot. max 3 A/out.
24201830100	Mono	24 V DC	8	Max 5 A tot. max 3 A/out.
24201840100	EDC	24 V DC	8	Max 5 A tot. max 3 A/out.

The Smarty Voice module allows for simultaneous control of up to 8 lamps via an app. It is also compatible with Amazon Alexa and Google Home systems and can be used with remote controls from the Smart 1 Controller, Smart Touch, Smart Ghost, Smart Sensor, Smart Switch and Smart Gateway ranges. Available in 12 V or 24 V versions, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

### SMART 1 CONTROLLERS



Smart 1 EDC



Smart 1 MONO

### SMART SENSORS & CONTROLLERS



Smart Touch



Smart Ghost



Smart Sensor



Smart Sensor



Smart Sensor O



Smart Switch




Smart Gateway



Amazon Alexa and Google Home are registered trademarks of Amazon and Google.

Each controller and sensor in the Smart line can control up to 6 modules.

## Smarty HCL MODULE



HCL	TYPE	IN.	WAYS	OUTPUT
24202610100	Emotion	24 V DC	8	Max 5 A tot. max 3 A/out.

The HCL module is dedicated to the biological and emotional aspects of light and allows the creation of customised scenarios. The dedicated mobile app enables you to choose the most suitable colour temperature for the specific function of the room (cooler in workplaces and warmer in convivial areas) or to time its variation, to reproduce the cycle of sunlight and follow the circadian rhythm. The HCL module allows for simultaneous control of up to 8 lamps via app, is also compatible with Amazon Alexa and Google Home systems and can be used with the remote controls of the Smart 1 Controller, Smart Touch, Smart Ghost, Smart Sensor, Smart Switch and Smart Gateway line. The modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

### SMART 1 CONTROLLERS



Smart 1 EDC



Smart 1 MONO

### SMART SENSORS & CONTROLLERS



Smart Touch



Smart Ghost



Smart Sensor



Smart Sensor



Smart Sensor O



Smart Switch



Smart Gateway




Amazon Alexa and Google Home are registered trademarks of Amazon and Google.

Each controller and sensor in the Smart line can control up to 6 modules.



## Wired MODULE




WIRED	TYPE	IN.	WAYS	OUTPUT
24201930100	Mono	12 V DC	4	Max 5 A tot. max 3 A/out.
24201940100	Mono	24 V DC	4	Max 5 A tot. max 3 A/out.

The Wired module allows for the simultaneous control of up to 4 lamps with separately sold PIR and IR sensors. Available in 12 V or 24 V versions, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

### PIR SENSOR



24201961000




milled dimension: Ø17mm

PIR presence sensor on 1.5m long cable. By pressing the hidden button, it is possible to change the switch-off timing (15sec ÷ 1hour).

### IR SENSOR / SWITCH




24201970300



milled dimension: Ø14mm

IR infrared sensor on 1.5m long cable. Using the concealed button, it is possible to select between "door" mode for switching on when the door is opened or "switch" mode for switching on and off by bringing the hand close.


## Kinetic MODULE



KINETIC	TYPE	IN.	WAYS	OUTPUT
24202510100	EDC	24 V DC	8	Max 5 A tot. max 3 A/out.

The Kinetic module allows simultaneous control of up to 8 lamps with the dedicated remote control. Thanks to piezoelectric technology, the control works without a battery, avoiding any maintenance. Available at 24 V, the modules can be connected to other distribution or control modules as long as the same output voltage is maintained.

### KINETIC CONTROLLER




- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings

01	24202530100	EDC
----	-------------	-----




Smart Music  
MODULE

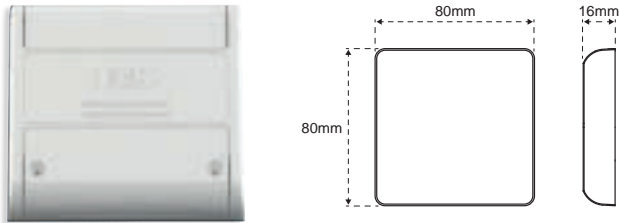


SMART MUSIC 24 V DC

01	24601870100	1 x speaker
01	24601880100	2 x speaker

The Smart Music module allows you to reproduce the audio signal of your smartphone through exciters, active speakers which, applied inside furniture or behind mirrors, transform surfaces into acoustic speakers. Smart Music is available in kits from one or two speakers (two speakers recommended for surfaces larger than 3 m2) The modules can be connected to other distribution or control modules as long as the same 24 V output voltage is maintained.



Configuration with one speaker







Two speaker configuration



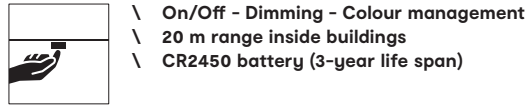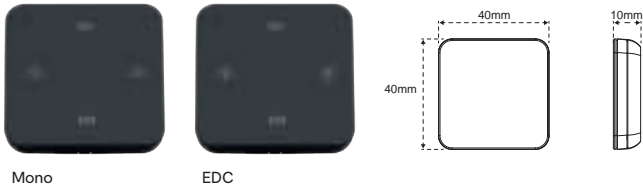



## Smart 1 CONTROLLER




SMART 1 CONTROLLER	TYPE	WAYS
 24201650300	Mono	8
 24201640300	EDC	8

Wireless touch controller. Associated with the Smart 1 Receiver, it controls the lights both for dimming the light intensity and for changing the colour temperature in the EDC and RGB versions.



## Smart Touch CONTROLLER

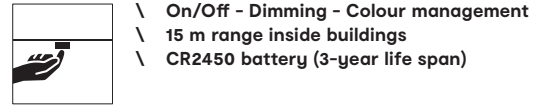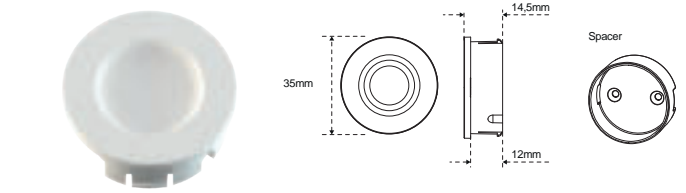




SMART TOUCH	TYPE
 24200740100	Mono \ EDC

Wireless touch controller. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour).

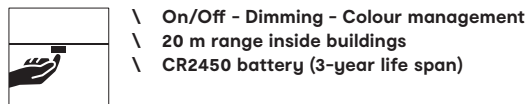
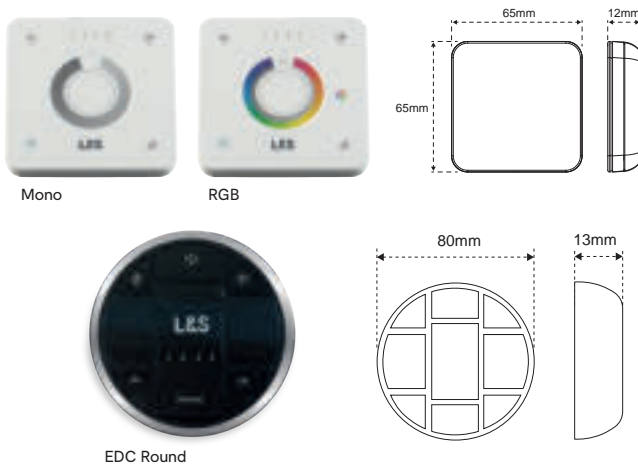
## Smart 4 CONTROLLER




SMART 4 CONTROLLER	TYPE	WAYS
 24200630101	Mono	4 ch.
 24202330300	EDC	4 ch.
 24200650101	RGB	4 ch.

Wireless controller with buttons, touch controls and with the option to control and store up to 4 independent channels. Combined with the Smart 1 Receiver or Smart 4 Receiver, it controls the lights both for dimming the light intensity and changing the colour temperature in the EDC and RGB versions.

## Smart Ghost SENSOR

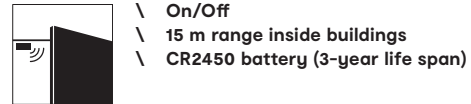
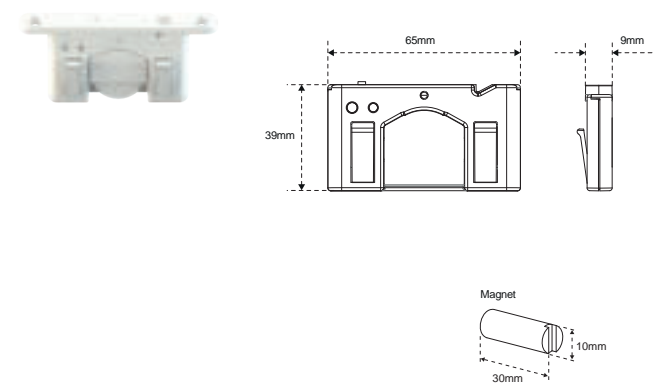


SMART GHOST	TYPE
 24200690100	Mono \ EDC



Wireless motion sensor to be applied on the doors of furniture to turn on and off the lights connected to it. Associated with Smart receivers (EDC / MONO), it controls the lights for ON/OFF functions. In installations with a magnet, the shutdown is immediate, without a magnet it is timed.

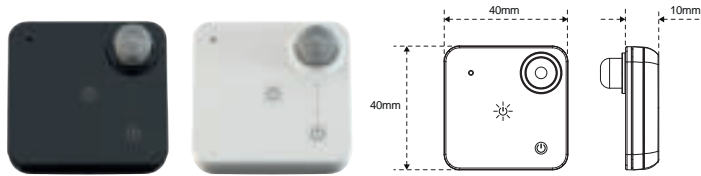

## Smart Sensor CONTROLLER





- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)


SMART SENSOR	TYPE
 24200750101	Mono \ EDC
 24200750300	Mono \ EDC

PIR sensor or wireless touch controller. When the sensor is activated, the minimum ambient brightness can be set, above which the light is not to be switched on, the switch-on time and the detection distance of the sensor can also be adjusted. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour).

## Smart Switch CONTROLLER


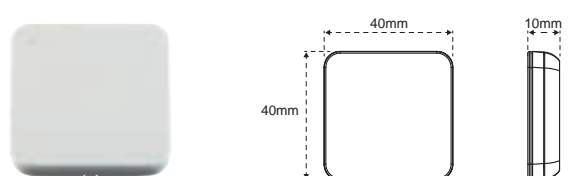


- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)

SMART SWITCH	TYPE
 24200660100	Mono \ EDC

Wall mounted remote control ideal for retrofitting; it shapes the standard buttons into a wireless controller and integrates with the existing system without the need for further intervention. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour). Wireless technology allows you to control new areas of light.

## Smart Sensor O SENSOR

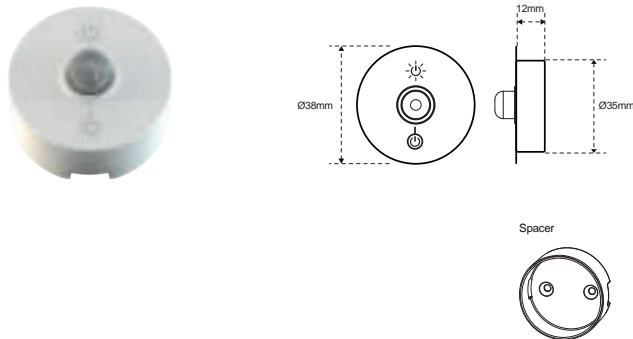


- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)

SMART SENSOR O	TYPE
 24201180100	Mono \ EDC

PIR sensor or wireless touch controller. When the sensor is activated, the minimum ambient brightness can be set, above which the light is not to be switched on, the switch-on time and the detection distance of the sensor can also be adjusted. Combined with Smart receivers (EDC / MONO), it controls the lights both for dimming the light intensity and changing the EDC colour temperature (Emotion Dual Colour).

## Smart Gateway HUB

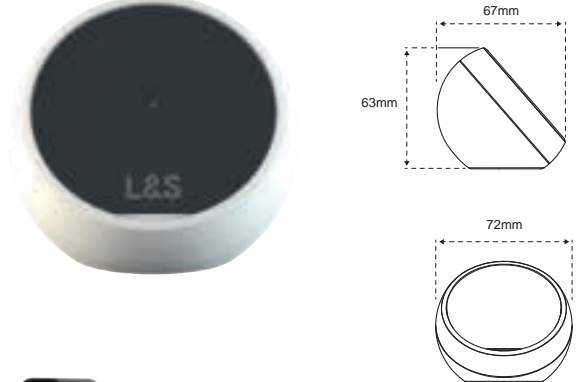



- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)

SMART GATEWAY	TYPE
 24200700100	Mono \ EDC

GATEWAY, the evolution of the network where electrical devices communicate with each other, and the control interface becomes the smartphone, tablet or PC. Through the Hub control panel, it is possible to connect control panels and electrical devices. The control interface with the App connects to the central Hub via Wi-Fi with a direct access point on the Hub. The Hub control unit, in turn, communicates with the lights of the system via radio. Reliability and control over long transmission distances.



## IR Door Tube

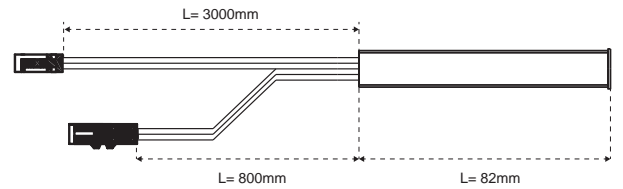





White







Black

### IR DOOR TUBE 12 V DC


	24202220100	EDC	Max 36 W	Max 3 A
	24202220300			
	24202200100	Mono	Max 36 W	Max 3 A
	24202200300			

### IR DOOR TUBE 24 V DC





	24202230100	EDC	Max 72 W	Max 3 A
	24202230300			
	24202210100	Mono	Max 72 W	Max 3 A
	24202210300			



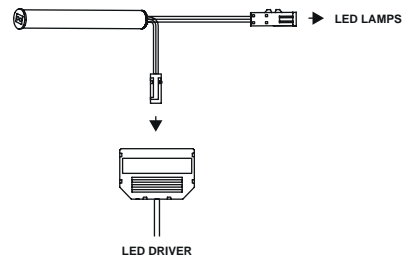



- \ Version 1 IR for single door cabinets
- \ 2 IR version for double leaf.
- \ Gradual switching on and off.




### 2 X IR DOOR TUBE 12 V DC

	24202260100	EDC	Max 36 W	Max 3 A
	24202260300			
	24202240100	Mono	Max 36 W	Max 3 A
	24202240300			

### 2 X IR DOOR TUBE 24 V DC

	24202270100	EDC	Max 72 W	Max 3 A
	24202270300			
	24202250100	Mono	Max 72 W	Max 3 A
	24202250300			

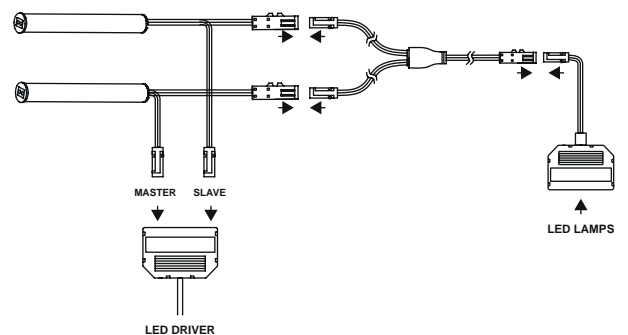









IR DC/DC









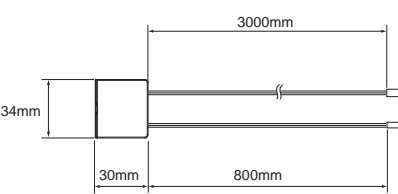

IR DC/DC

	12808146500	1 IR	12 V DC	Max 36 W	Max 3 A
	12808166500	2 IR	12 V DC	Max 36 W	Max 3 A
	12808156500	1 IR	24 V DC	Max 60 W	Max 2.5 A
	12808176500	2 IR	24 V DC	Max 60 W	Max 2.5 A



Infrared sensor for switching on and off, surface installation with screws, available in 12V or 24V version.



IR DC/DC RECESSED


	12807816500	1 IR	12 V DC	Max 36 W	Max 3 A
	24201690300				
	12807826500	2 IR	12 V DC	Max 36 W	Max 3 A
	24201700300				
	12808266500	1 IR	24 V DC	Max 60 W	Max 2.5 A
	24201710300				
	12808276500	2 IR	24 V DC	Max 60 W	Max 2.5 A
	24201720300				

Infrared sensor for switching on and off, flush-mounted installation, available in 12V or 24V version.

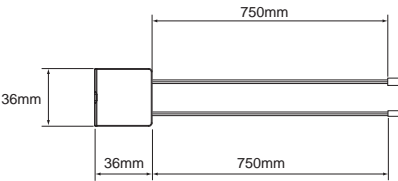



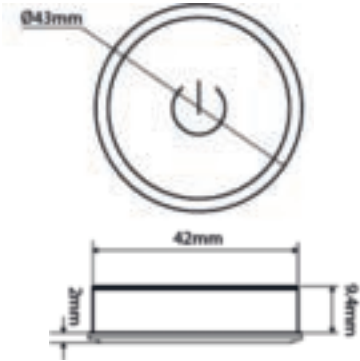

# R Touch




Recessed                      Surface






## R TOUCH

	24202060300	12 V DC	Max 24 W	Max 2 A
	24202790300	24 V DC	Max 48 W	Max 2 A





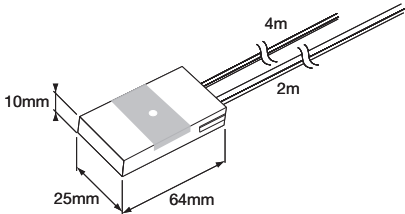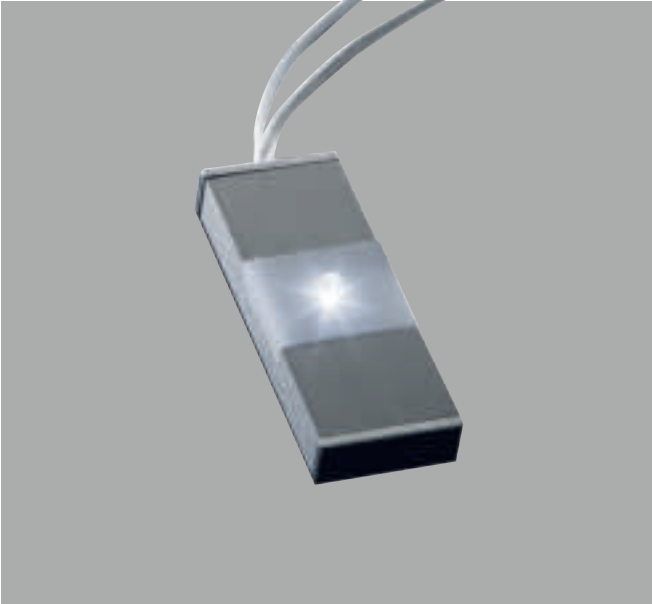


- \ On/Off - Dimming - Colour management
- \ 15 m range inside buildings
- \ CR2450 battery (3-year life span)

# Touch Dim Control



## TOUCH DIM CONTROL


	12808121200	12 V DC	max 36 W	max 3 A
	12808129100			
	12808131200	24 V DC	max 72 W	max 3 A
	12808139100			



- \ On/Off - Dimming




Kit Sensor

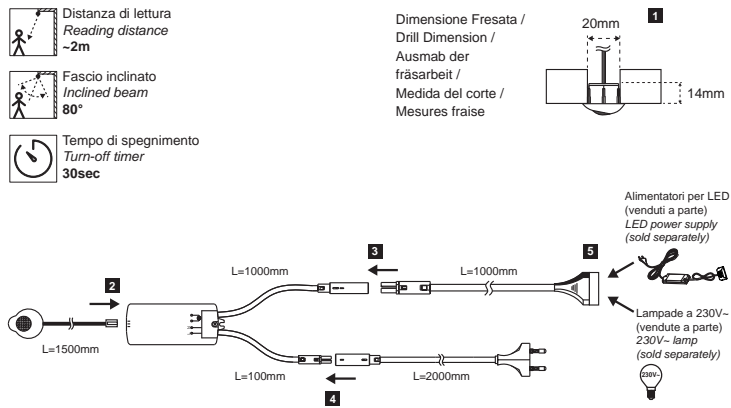


KIT SENSOR

	12405416501	220-240 V AC	Max 250 W
---	-------------	--------------	-----------






- \ Integrated and timed PIR sensor
- \ Receiving distance: 2m

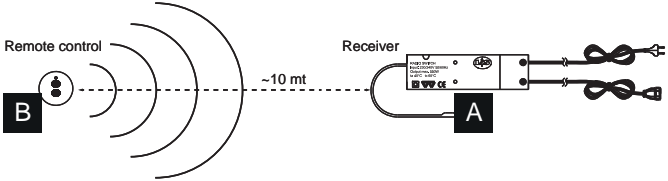Radio Switch




RADIO SWITCH

	12404770101	Radio control + receiver 50-60 HZ
	12404786501	Radio control




- \ Maximum receiver range: 550 W, max 16 A
- \ Reception distance: 8 - 10 m
- \ Up to 9 commands can be associated with one receiver
- \ Up to 3 receivers can be combined with one remote control



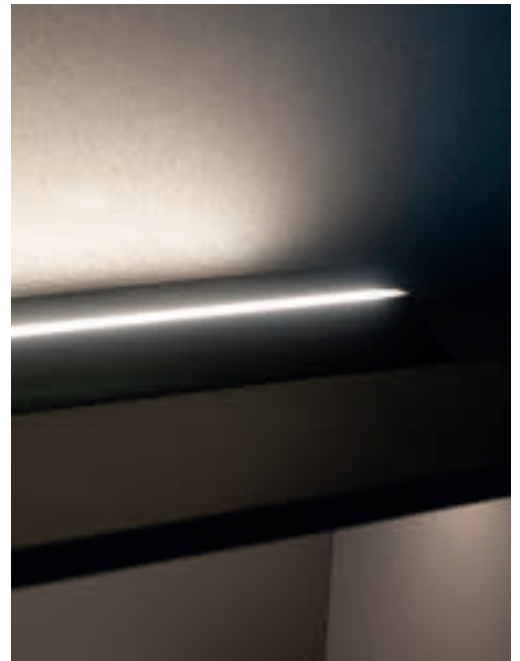

Courtesy wall washer lighting

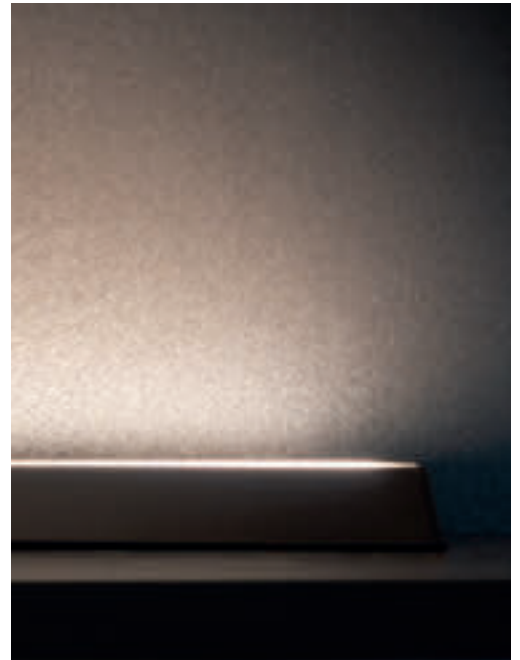

# Slimfit


## Cable and power organisation

Comfort and convenience.

A functional solution suitable for indoor environments: kitchen, living area, sleeping area, bathroom.

Thanks to its minimalist and extremely functional design, Slimfit is the perfect solution if there is a need to hide the wiring and power supplies of the lights installed in the cabinets above the wall units.

Slimfit has a reduced aesthetic impact, respecting the environment in which it is installed: it also offers courtesy lighting that enhances its use even more.

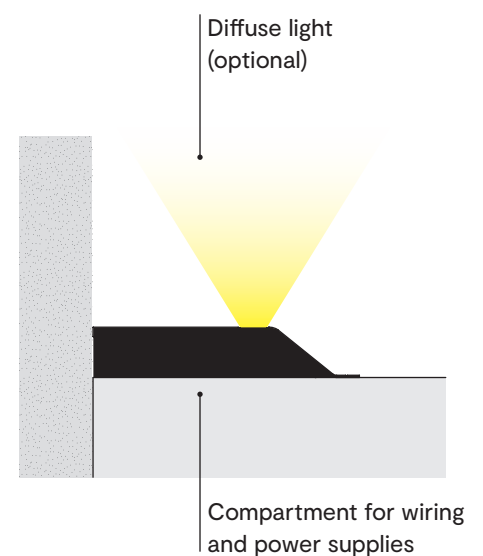




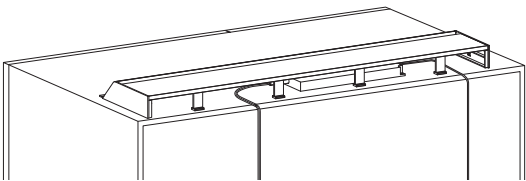
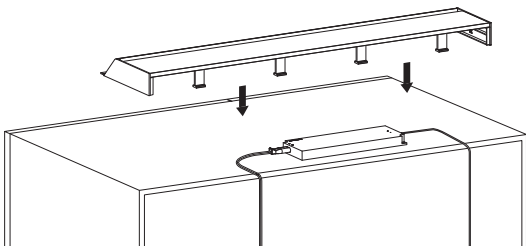


# Slimfit



## SLIMFIT

 12423550100 2950 mm





Slimfit is supplied as a kit, consisting of a 2950 mm long profile with an opal diffuser that can be cut to size, two end caps and the corresponding supports to prevent the profile from bending. The finish is white.  
The optional LED source is a 3m long EDC strip reel, available in 12 or 24 V.



## STRIP REEL 12 V DC

	LEDs/m	W/m	L.	CCT
12810810000AGD	120 + 120	13	3000 mm	EDC





### CABLES AND CONNECTORS

	Power cable from lamp to 12 V ballast, includes two springs for joining lengths without soldering.	L. 3000 mm 12603960000
	Extension from output cable to 12 V power supply unit.	L. 1100 mm 12604220000 L. 2200 mm 12604230000
	EDC jumper: reversing the polarity of the connector changes its colour from warm to natural (only for EDC 12 V version).	L. 50 mm 12605010000
	MEC DRIVER See page 262 for the choice of power supply system.	

## STRIP REEL 24 V DC


	LEDs/m	W/m	L.	CCT
12810820000AHD	120 + 120	13	3 m	EDC

### CABLES AND CONNECTORS





	Power cable from lamp to 24 V ballast, includes two springs for joining lengths without soldering.	L. 3000 mm 12603920000
	Extension from output cable to 24 V power supply unit	L. 1100 mm 12604630000 L. 2200 mm 12604620000
	EDC jumper: reversing the polarity of the connector changes its colour from warm to natural (only for EDC 24 V version)	L. 50 mm 12605020000
	MEC DRIVER See page 262 for the choice of power supply system.	

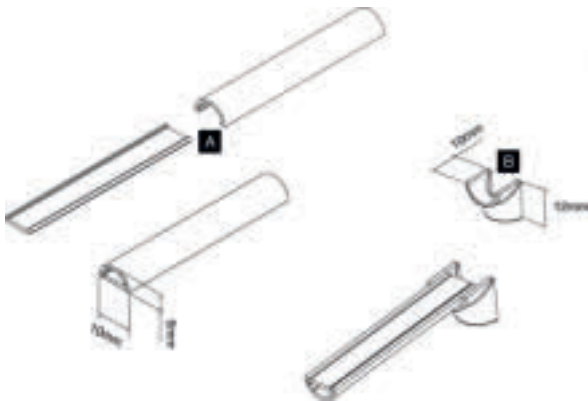

Cable duct




CABLE DUCT



	12208960300	A	600 mm
	12200620100	A	1200 mm
	12200626500	A	1200 mm
	13201056500	B	12 x 10 mm

The plastic profile can be installed with double-sided tape (included) and allows you to organize and hide the exposed cables.

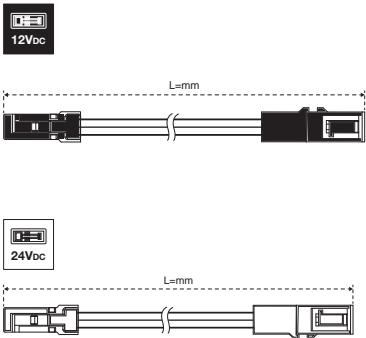Extension cord




EXTENSION CORD




	12604220000	12 V	1100 mm
	12604230000	12 V	2200 mm
	12604630000	A	1100 mm
	12604620000	B	2200 mm




# Corner Multisocket




## CORNER MULTISOCKET

	10800061200	Single socket
	10800071200	Double socket
	10802531200	Double socket + USB

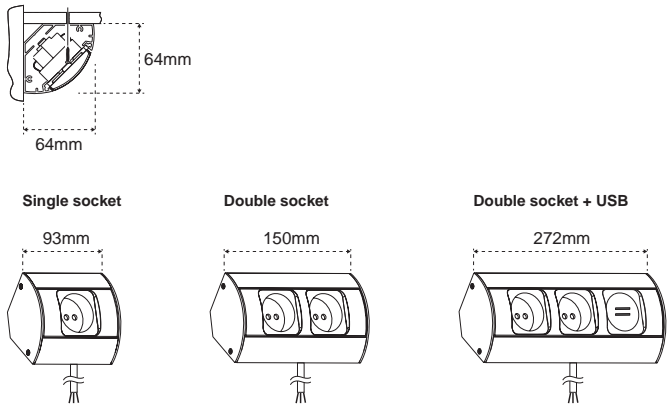


# Toki



## TOKI

	24600019100	50-60 Hz.	h. 540 / 590 mm
---	-------------	-----------	-----------------

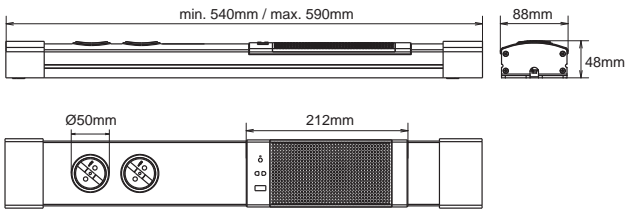

Turret equipped with 2 Schuko sockets, 1 USB and an integrated audio system with Bluetooth for connection to mobile devices, The height is adjustable (540/590mm).







**ART DIRECTION**

L&S Italia Marketing Dept.

**RENDERING \ PHOTOSHOOTING**

Linkfoto

Michele Marcon Designer

L&S Italia Marketing Dept.

**PRINT**

IMOCO

07- 2021

**GENERAL SALES CONDITIONS**

The characteristics of the products (drawings, dimensions and materials) shown in the catalogue and on the website are purely indicative and can be modified by L&S ITALIA S.p.A. at any time and without notice.

The General Sales Conditions can be found in full at the following link:

[www.ls-light.com/Download/CGV/CGV\\_it.pdf](http://www.ls-light.com/Download/CGV/CGV_it.pdf)





**LS-LIGHT.COM**

## Italy

**L&S  
ITALIA  
S.P.A.**

Viale L. Zanussi, 8  
33070  
Maron di Brugnera PN  
Italy

+39 0434 616611  
info@ls-light.com

## Germany

**L&S  
DEUTSCHLAND  
GMBH**

Daimlerring, 34  
32289 Rödinghausen  
Germany

+49 5223 8790-0  
info@ls-deutschland.de

## China

**L&S  
LIGHTING  
EQUIPMENT**

(Shanghai) Co., Ltd.  
No.255, Longpan Rd.,  
Malu Town,  
Jiading District,  
Shanghai  
China

+86 021 69156791  
info@ls-light.cn

## USA

**L&S  
LIGHTING  
CORPORATION**

1505 Pavilion Place  
Suite A Norcross GA  
30093  
USA

+1 877 877 0757  
info@ls-light.us







LS-LIGHT.COM