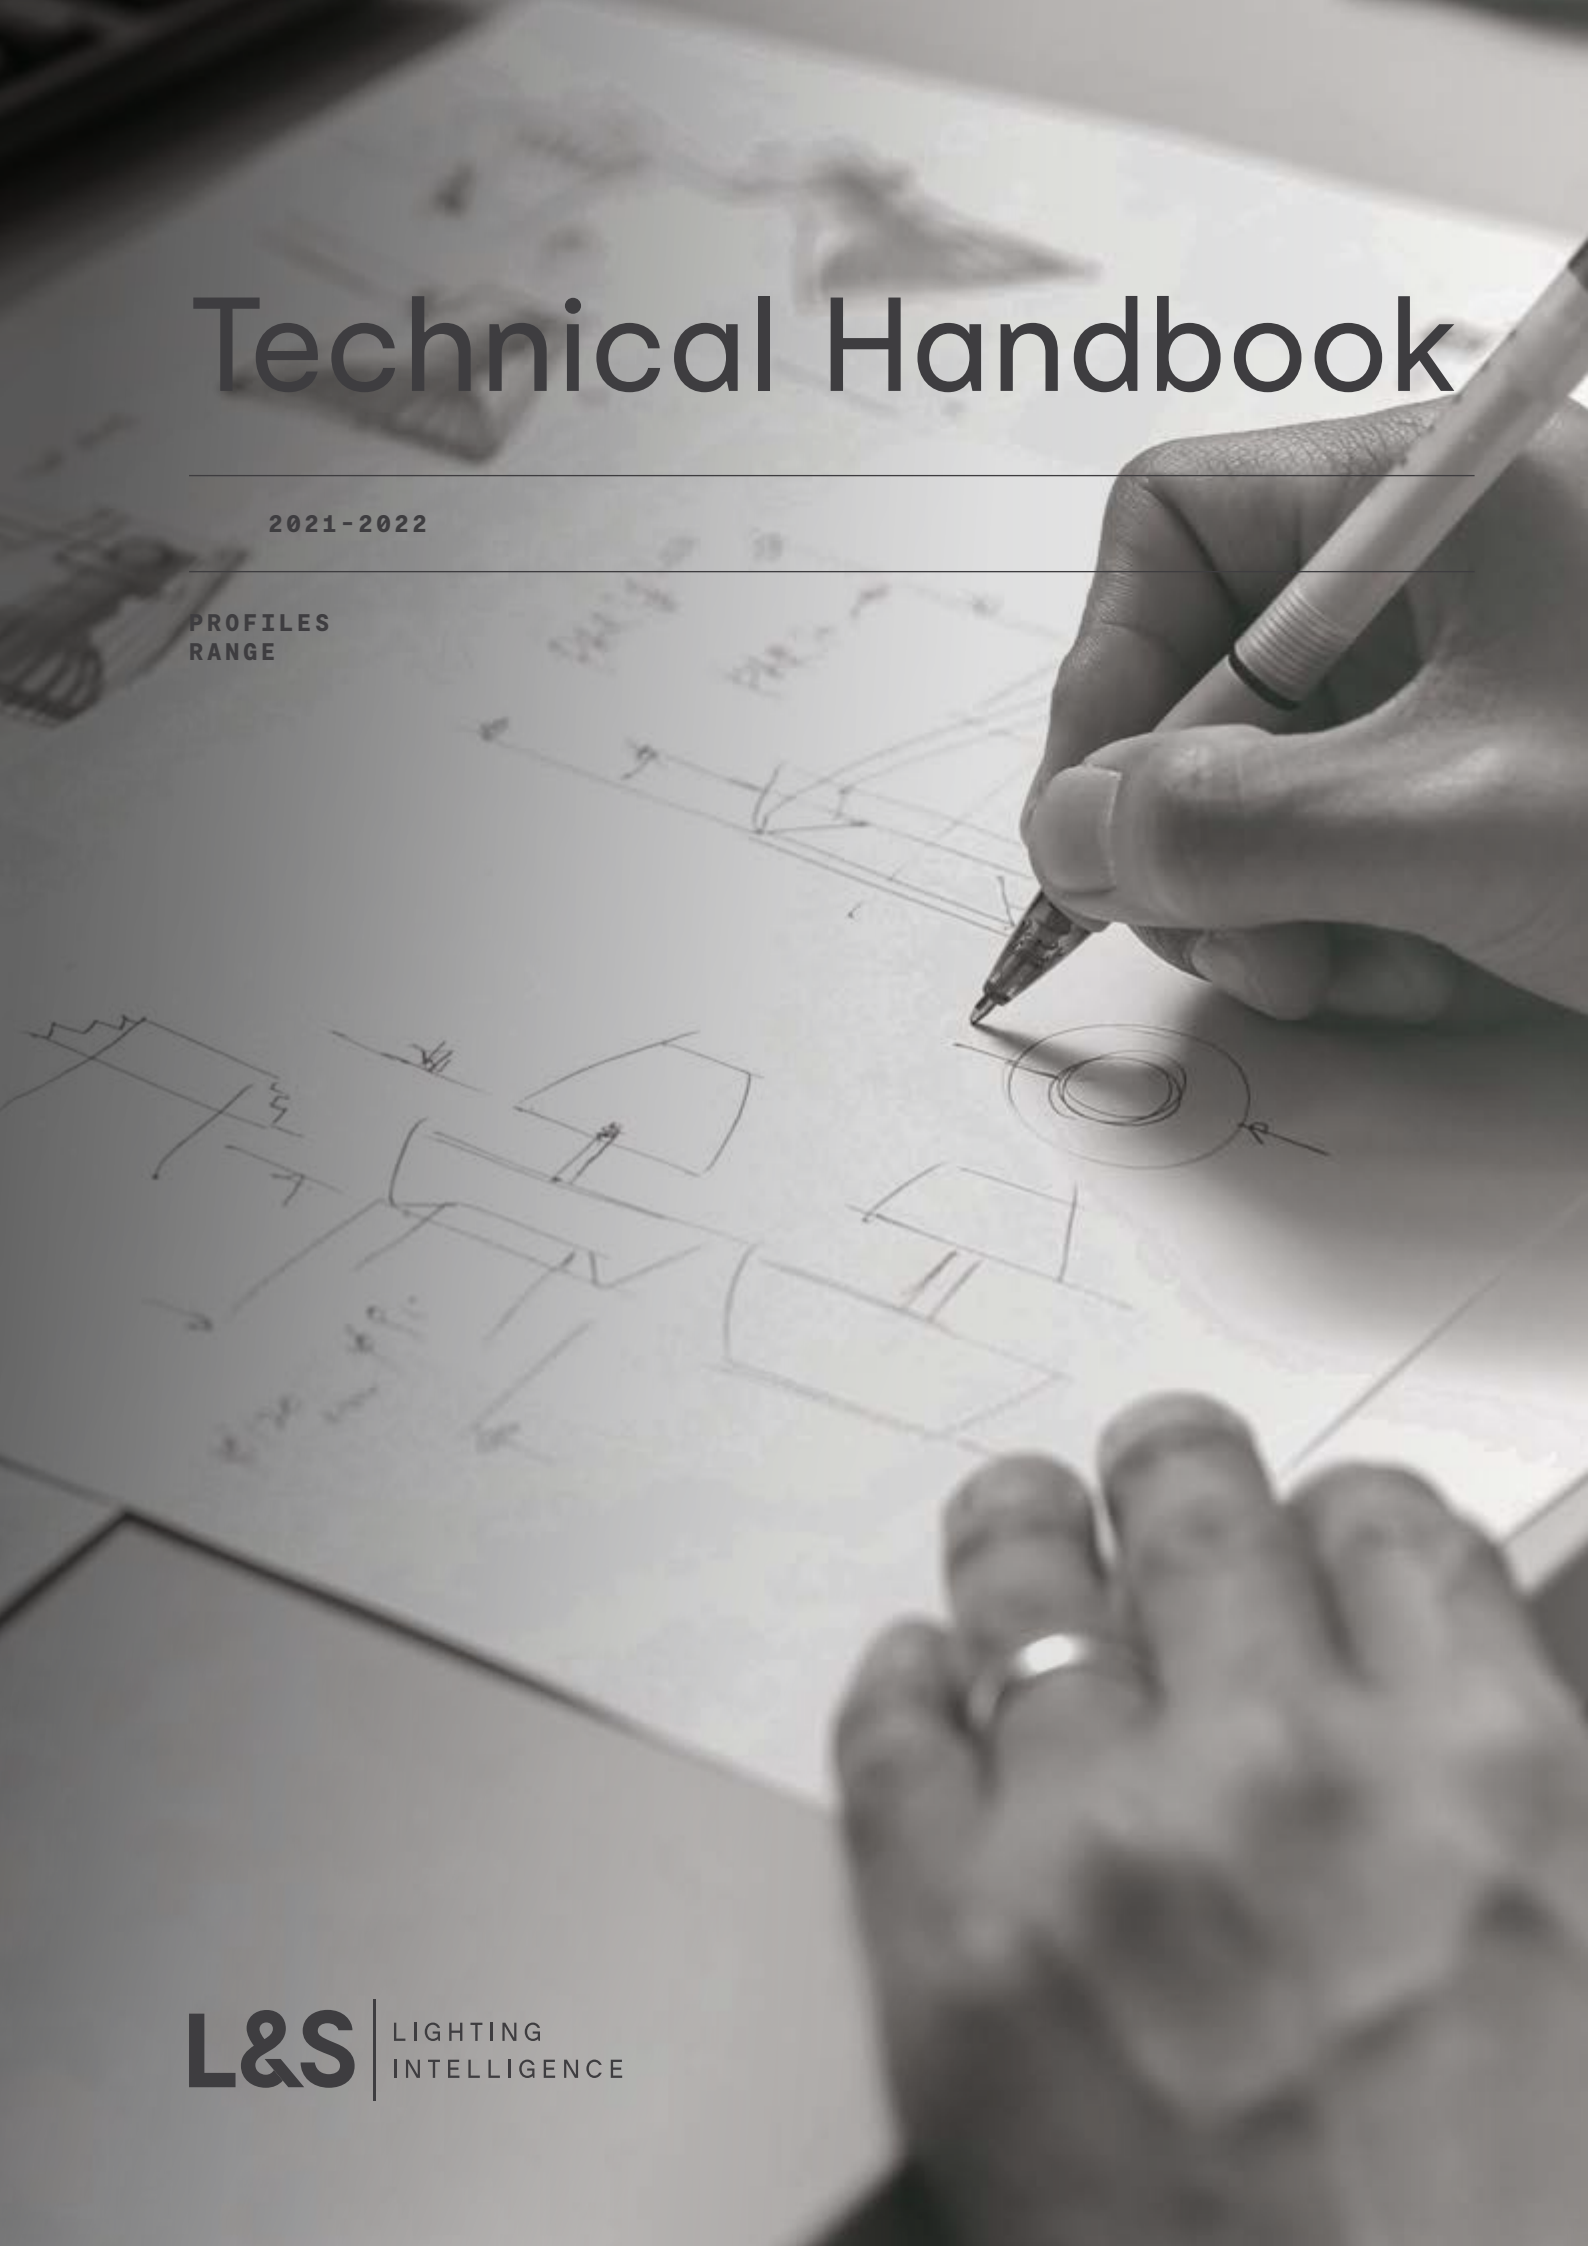
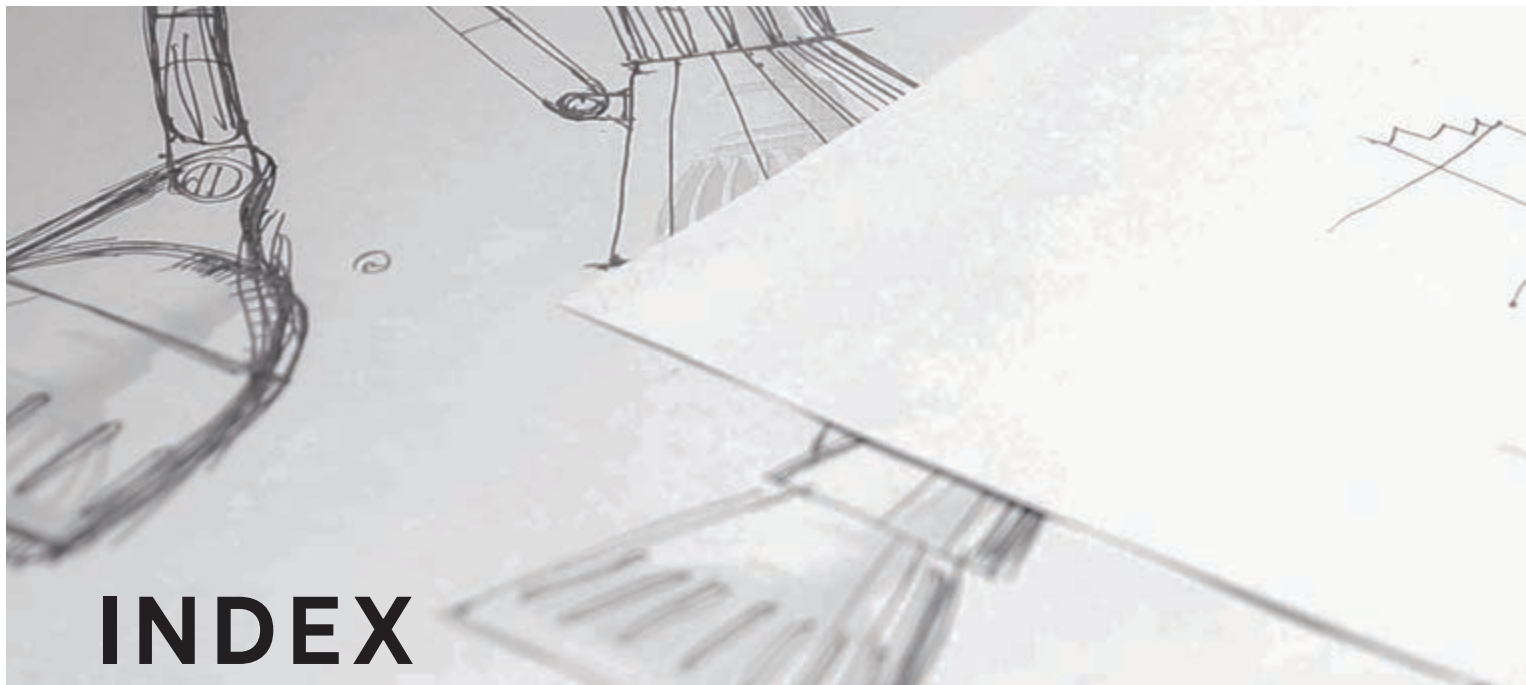


Technical Handbook



2021-2022

PROFILES
RANGE



INDEX



THE TECHNICAL HANDBOOK **4**

IL PRONTUARIO TECNICO



RECESSED FIXTURE **5**

APPARECCHI DA INCASSO



SURFACE MOUNTED FIXTURE **10**

APPARECCHI A SUPERFICIE



SURFACE MOUNTED FIXTURE SHELF AND WALL CABINET APPLICATION **17**

APPLICAZIONI PER
MENSOLE E PENSILI



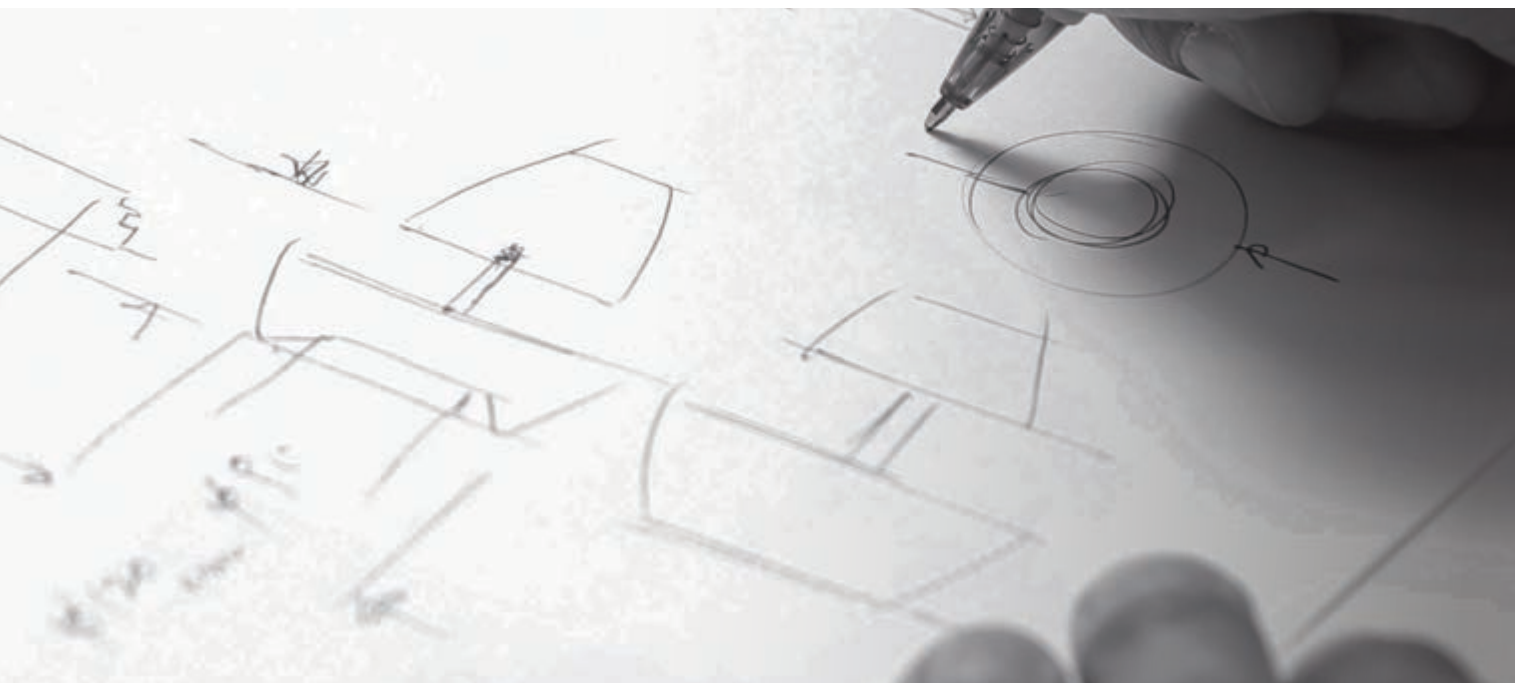
SURFACE MOUNTED FIXTURE DRAWER LIGHT APPLICATION **19**

APPLICAZIONI PER
LUCI A CASSETTONE



SURFACE MOUNTED FIXTURE GLASS SHELF APPLICATION **20**

APPLICAZIONI PER
MENSOLE IN VETRO



**SURFACE MOUNTED FIXTURE
WARDROBE TUBE
APPLICATION**
APPLICAZIONI PER
TUBO APPENDI ABITI

21



**DO IT YOURSELF
MECCANO
SYSYEM**
SISTEMA FAI-DA-TE
MECCANO

22



**LIGHT SOURCE
STRIP REEL
RANGE**
SORGENTE LUMINOSA
MODELLI DI STRIP REEL

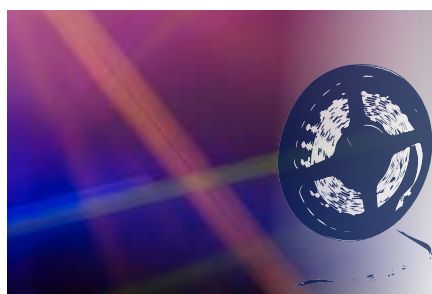
26



**UV LIGHT
PRODUCT RANGE**

31

LUCI UV
SELEZIONE PRODOTTI



**LIGHT SOURCE
UV STRIP REEL**

35

SORGENTE LUMINOSA
BOBINE LED UV

TECHNICAL HANDBOOK

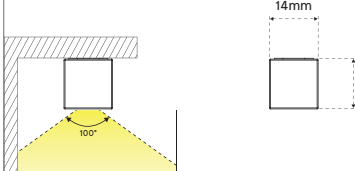
PRONTUARIO TECNICO

The technical handbook wants to be a useful and quick tool for helping you in choosing the right lighting fixture based on your installation needs and requirements, without having to go through the entire L&S catalogue everytime.

Starting from the selection of the fixture profile, to the strip-reels and the built-in controllers, you will be able to choose between ready-to-use models and the DIY Meccano solutions for the most flexible customization.

Il prontuario tecnico vuole essere un utile e veloce strumento per aiutare chi lo legge, a scegliere la corretta lampada lineare in base alle proprie esigenze e richieste di installazione, senza dover consultare ogni volta il catalogo completo di L&S.

Partendo dalla selezione del profilo della lampada, al motore led (Strip Reel) da utilizzare, arrivando ai controller integrati, sarà possibile selezionare tra modelli pronti all'uso e le soluzioni "fai-da-te" Meccano, per la massima flessibilità di personalizzazione.

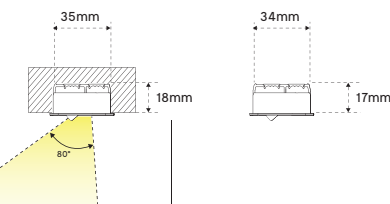
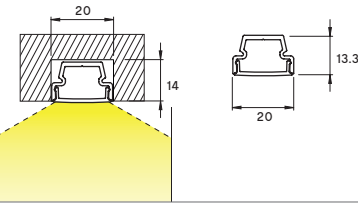
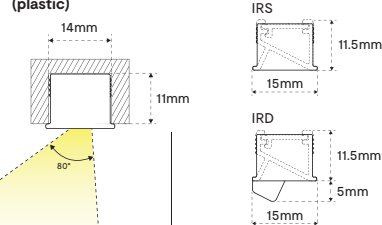
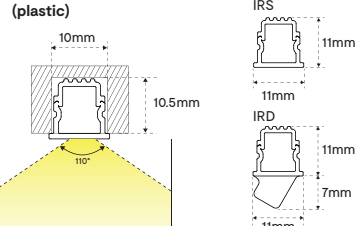
1	2	3	4	5	6	7	8	9	10
PRODUCT NAME	DAISY CHAIN	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER	CONTROLLER POSITION
Bali (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.3m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH	. RIGHT . LEFT

- 1** Technical drawing, main dimensions and illumination shape.
Disegno tecnico, dimensioni principali e fascio di illuminamento.
- 2** Possibility to make a daisy chain installation of two or more fixture.
Possibilità di connessione in fila continua di due o più apparecchi.
- 3** Max. length of 3 key components: the strip reel, the profile, the screen. The length of a fixture will depends on the combination of those 3 factors.
Lunghezza massima dei 3 componenti: le strip reel, il profilo, lo schermo. La lunghezza di un apparecchio dipenderà dalla combinazione di questi 3 fattori.
- 4** Width of the strip reel you can get onboard on that profile.
Larghezza della strip reel che può essere applicata sul profilo.
- 5** Type of finish you can choose for the fixture screen.
Tipo di finitura disponibile per lo schermo dell'apparecchio.
- 6** Finish options for the profile.
Finiture disponibili per il profilo.
- 7** Which type of input connectors can be supplied.
Quale tipo di connettore di alimentazione può essere fornito.
- 8** How the fixture can get installed and on which type of surface.
Come l'apparecchio può essere installato e su che tipo di superficie.
- 9** Which control system you can get onboard inside the lamp.
Quale tipo di controller può essere integrato nella lampada.
- 10** Built-in controller positions you can choose in order phase.
Posizione del controller integrato che si può scegliere in fase d'ordine.



RECESSED FIXTURE

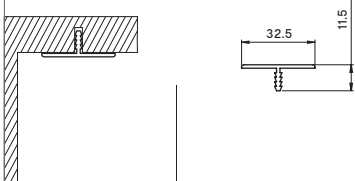
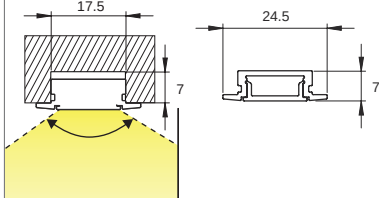
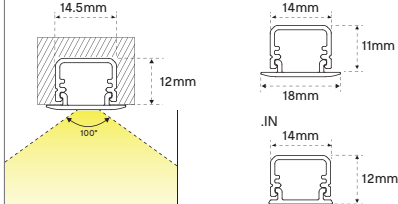
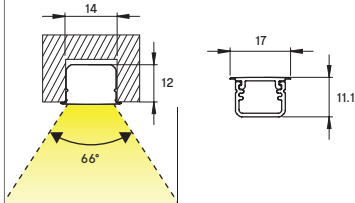
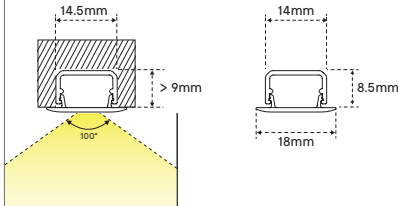
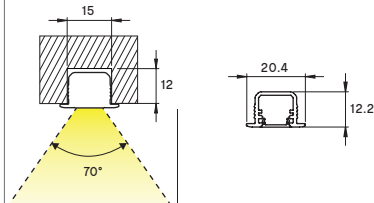
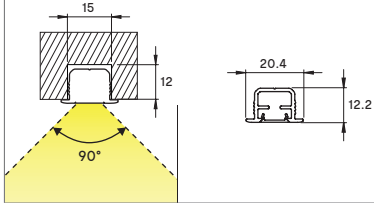
SUITABLE FOR UNDERCABINET, UNDERSHELF AND CABINET USE

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Capri (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	PIR SENSOR	. RIGHT . LEFT
Kaba LED Leiste (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Kaleo (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . IR DOOR	. RIGHT . LEFT
Kendo (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . IR DOOR	. RIGHT . LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

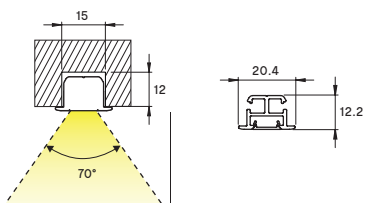
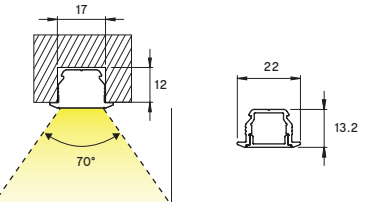
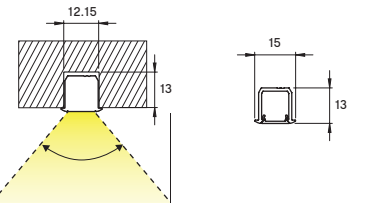
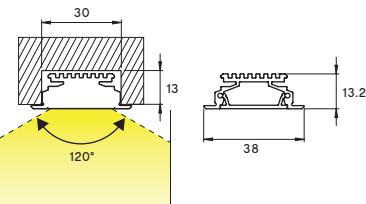
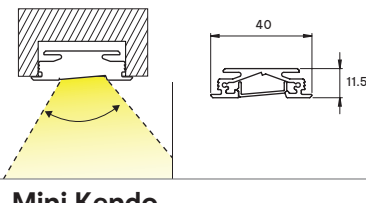
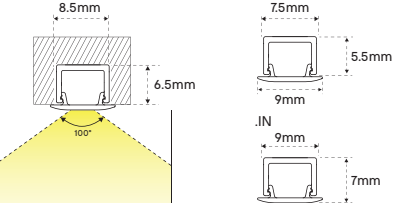
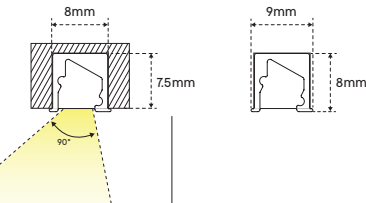
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Lichtbodenprofil flach (aluminum) 	NO	STRIP: N.A. PROFILE: 6m COVER: 6m	N.A.	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
London (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. FROSTED . BLACK . CLEAR	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Malindi (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . TOUCH	. RIGHT . LEFT
Malindi (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	TRANSLUCENT	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Malindi2 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	IR SWITCH	. RIGHT . LEFT
Manila (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	TRANSLUCENT	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Manila II (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

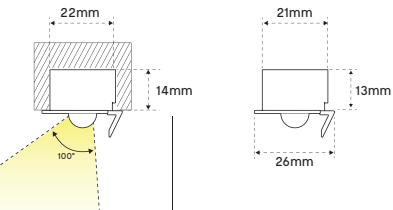
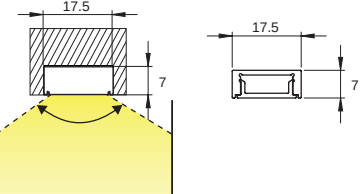
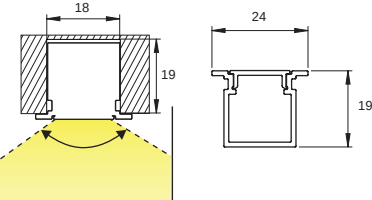
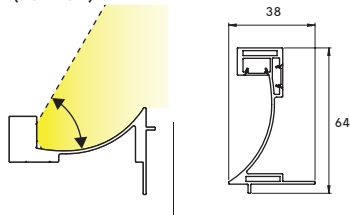

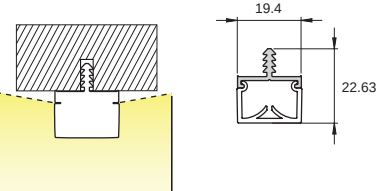
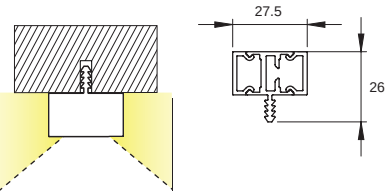
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Manila III (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Manila IV (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Manila Mini (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	MATT OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Manila Plus (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	OPAL	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Manila V (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Mini Kendo (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	N.A.	N.A.
Mini Noor (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

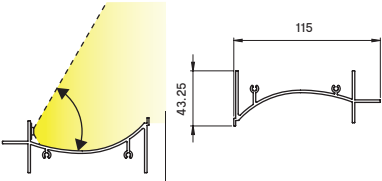
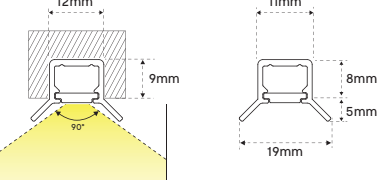
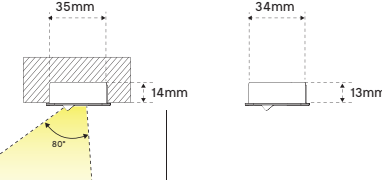
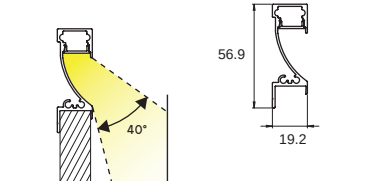
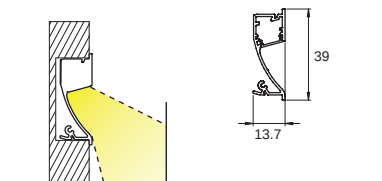
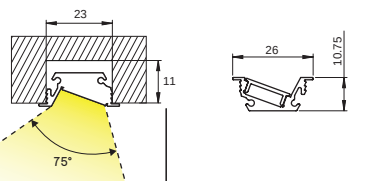
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Miska (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: 10-GRAY CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	PIR SENSOR	. RIGHT . LEFT
Paris (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. FROSTED . BLACK . CLEAR	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Prag (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. FROSTED . BLACK . CLEAR	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Puris Profil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	. OPAL . MATT OPAL . TRANSPARENT	STANDARD: PLATE FINISH CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
RGBW Profil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Stirnkantenprofil (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	OPAL	STANDARD: 00-TRANSP. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Stollenbeleuchtung (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	MATT OPAL	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
V&B Aluprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	N.A.	STANDARD: . 01-WHITE . 03-BLACK CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Velar (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	N.A.	N.A.
Venice (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. PIR SENSOR . TOUCH	. RIGHT . LEFT
Venice A (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	FROSTED	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Venice II (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	FROSTED	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Venice Mini (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	N.A.	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.





* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.










SURFACE-MOUNTED FIXTURE

SUITABLE FOR UNDERCABINET, UNDERSHELF AND CABINET USE

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Air LED Plus (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 2.5m	10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Bali (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH	. RIGHT . LEFT
Bali (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	. OPAL . MATT OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. . 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Bali S20 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

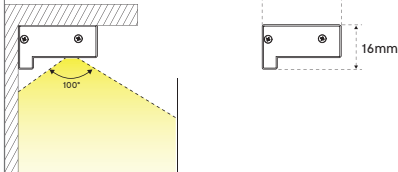
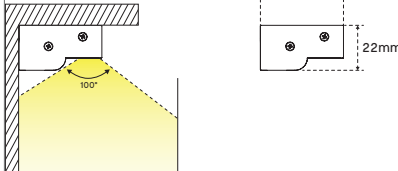


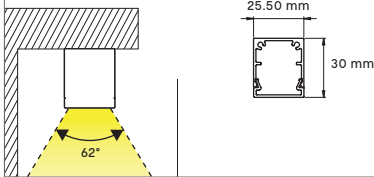
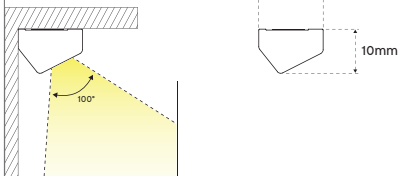
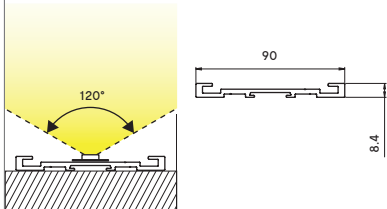
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Brasilia (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Cali Emotion (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2.5m COVER: 2.5m	. 5mm . 10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.
Corner (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Derby II (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	OPAL	STANDARD: E6 / C31 CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Detroit (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Elba (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	PIR SENSOR	. CENTER
Geneve (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	. IR SWITCH . TOUCH	. RIGHT . LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.








** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Ghibli (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	IR SWITCH	. RIGHT . LEFT
Ghibli KS (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR SWITCH	LEFT
Grundprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	N.A.	STANDARD: PLATE FINISH CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Hinterglasprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	GLASS	N.A.	N.A.
Ice (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	TRANSLUCENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Iko (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	IR SWITCH	. RIGHT . LEFT
iLED (aluminum) 	NO	STRIP: ON BOARD PROFILE: 6m COVER: 6m	N.A.	TRANSLUCENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

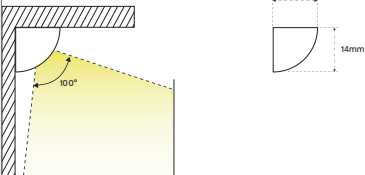
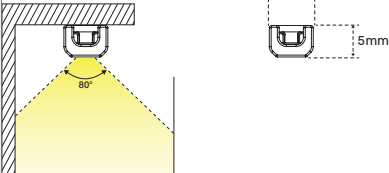
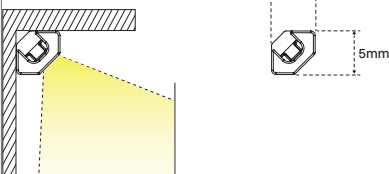
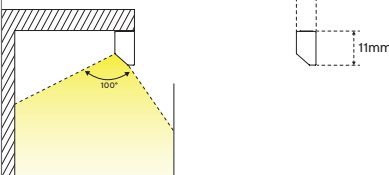
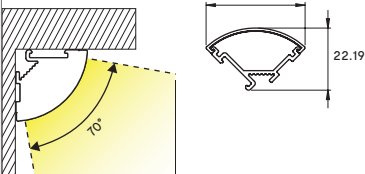

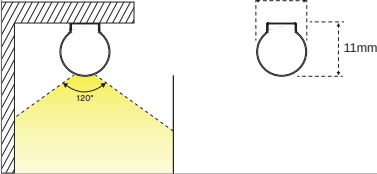
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Insider (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	PIR SENSOR	. RIGHT . LEFT
Kea (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	IR SWITCH	. RIGHT . LEFT
Kubi (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	IR SWITCH	. RIGHT . LEFT
LED Erhöhung (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	MATT OPAL	STANDARD: PLATE FINISH CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Ledò (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH	. RIGHT . LEFT
Lugano (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	. IR SWITCH . TOUCH	. RIGHT . LEFT
Lugano IP44 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	IR SWITCH	. RIGHT . LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

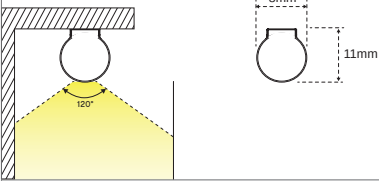

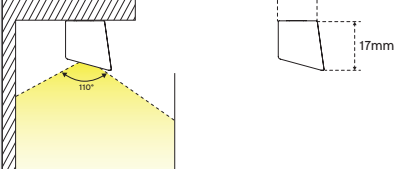
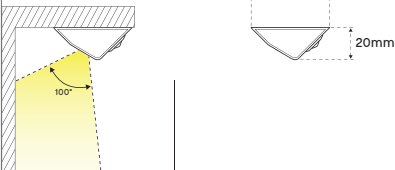
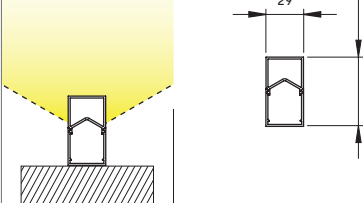


** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Micodi (aluminum) 	NO	STRIP: BASED ON SELECTED CUSTOM LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	METAL	N.A.	N.A.
Microline (aluminum) 	NO	STRIP: 800mm* (1 INPUT) PROFILE: 3.0m COVER: N.A. *rigid PCB 800mm (8.2W/m 615 Lu/m)	3mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Microline 45° (aluminum) 	NO	STRIP: 800mm* (1 INPUT) PROFILE: 3.0m COVER: N.A. *rigid PCB 800mm (8.2W/m 615 Lu/m)	3mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Mini (aluminum) 	NO	STRIP: BASED ON SELECTED CUSTOM LED STRIP PROFILE: 3.0m COVER: 3.0m	4mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	METAL	N.A.	N.A.
Mini Corner (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2m COVER: 2m	10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Mini Tubular (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 1.8m COVER: 1.8m	5mm	TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Mini Tubular Q (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2.0m COVER: 2.0m	5mm (Emotion)	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.


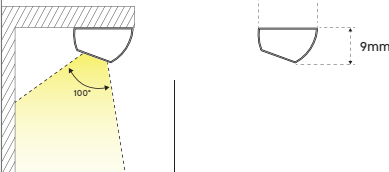
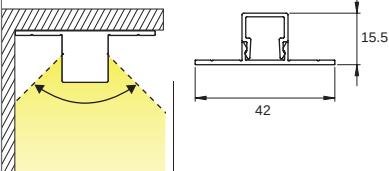
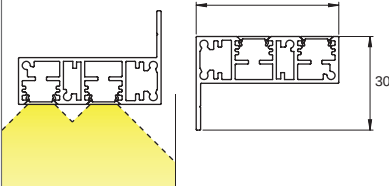
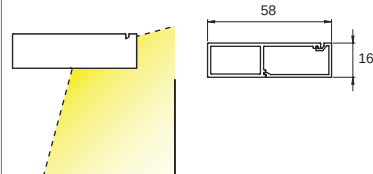
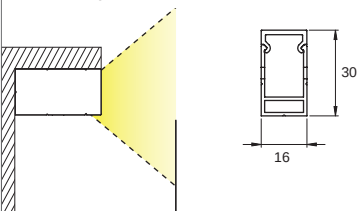
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mini Tubular Q IC (plastic) 	YES	STRIP: INCLUDED STANDARD: 1103mm EMOTION: 1087mm	N.A.	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: INPUT CONNECTOR CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.
Mini Tubular R (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 1.5m COVER: 1.5m	. 5mm . 10mm	OPAL	STANDARD: 03-BLACK CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.
Osaka (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: MINITRACK	WOOD	IR SWITCH	LEFT
Perth (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	PIR SENSOR	. CENTER
Profil Hülsta (aluminum) 	NO	STRIP: N.A. PROFILE: 6m COVER: 6m	N.A.	N.A.	STANDARD: N.A. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Quattro Mini (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. FROSTED . TRANSLUCENT	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Quattro Plus (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. FROSTED . TRANSLUCENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Rechteckprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Skyline (aluminum) Skyline -S 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Skyline neu (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: PLATE FINISH CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
Spiegelprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	MATT OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	GLASS	N.A.	N.A.
Variado (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL . GLASS	N.A.	N.A.
WTU Profil (aluminum/plastic) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.

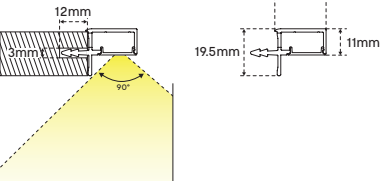
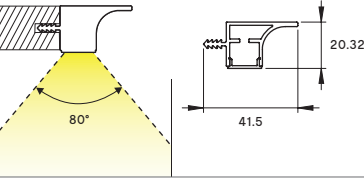
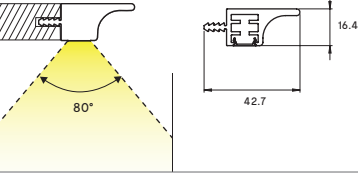
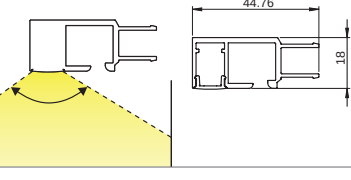
* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.



SURFACE-MOUNTED FIXTURE

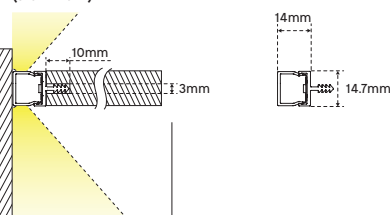
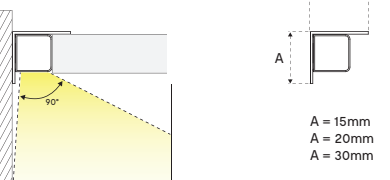
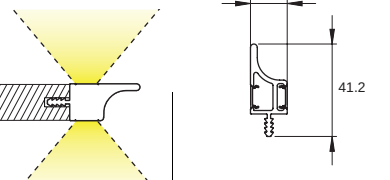
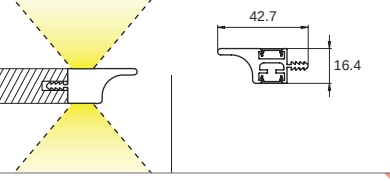
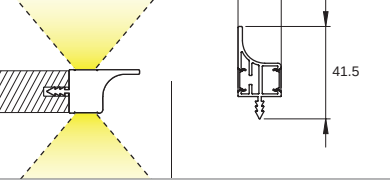
SUITABLE FOR SHELF AND WALL CABINET APPLICATION

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Oslo2 (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR SWITCH	. RIGHT . LEFT
Down (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. OPAL . FROSTED	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Down II (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	. OPAL . FROSTED	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Mosaic plus (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. OPAL . MATT OPAL . TRANSPARENT	STANDARD: . 03-BLACK STANDARD: . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.



** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Sirenuse (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Twilight (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Up & Down 4 (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. OPAL . TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Up & Down 16 (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. OPAL . TRANSPARENT	STANDARD: . 24-BRASS . 91-BRUSHED STEEL CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Up & Down 19 (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	10mm	. OPAL . TRANSPARENT	STANDARD: 24-BRASS CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.



PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Kiton (aluminum) 	NO	1800mm	5mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR DOOR	. RIGHT . LEFT . RIGHT & LEFT
Mec Drawer (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR DOOR	RIGHT

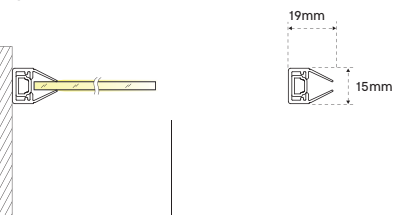


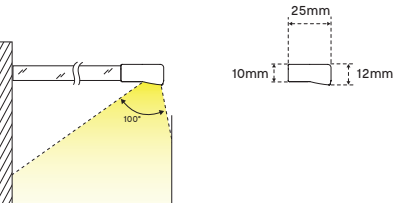
* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.



SURFACE-MOUNTED FIXTURE

SUITABLE FOR GLASS SHELF APPLICATION



PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Fly Light (plastic) 	YES	1200mm	. 5mm . 10mm	N.A.	STANDARD: 65-METAL GRAY CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	N.A.	N.A.
Glaskantenprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	GLASS	N.A.	N.A.
Glaskantenprofil (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 6m COVER: 6m	8mm	N.A.	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	GLASS	N.A.	N.A.
Globus (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: MINITRACK	GLASS	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

SURFACE-MOUNTED FIXTURE

SUITABLE FOR WARDROBE TUBE APPLICATION

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mec Rack (aluminum)   DIY SYSTEM	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	PIR SENSOR	. RIGHT . LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.



MECCANO & MICRO MECCANO

DO IT YOURSELF

DIY DESIGN, ASSEMBLY AND REPLACEMENT

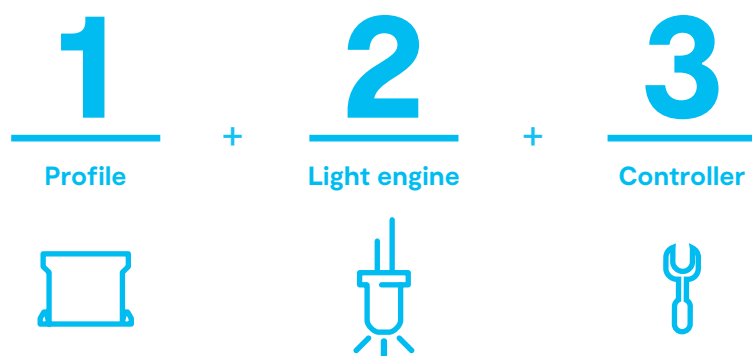
Meccano and Micro Meccano is the complete linear lighting program that allows you to compose the most suitable lamp for your needs in total autonomy. By combining the different profiles with compatible screens and control accessories, it is possible to create a completely customized and easy to assemble lighting fixture.

The dedicated connector allows to perfectly house the LED reels that can be sectioned without the need to weld, simplifying the work and reducing material waste.

DIY CREA, ASSEMBLA E SOSTITUISCI








Meccano è il sistema di illuminazione completo che permette di costruire, in totale autonomia, diversi modelli di lampade in base alle proprie esigenze. Combinando tra loro i diversi profili con i relativi schermi e accessori per il controllo della luce, è possibile creare un completo apparecchio di illuminazione personalizzato e facile da montare.

Il connettore di alimentazione è stato studiato per una perfetta installazione della sorgente LED scelta senza bisogno di eseguire operazioni di saldatura, facilitando il lavoro e riducendo gli scarti.



* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

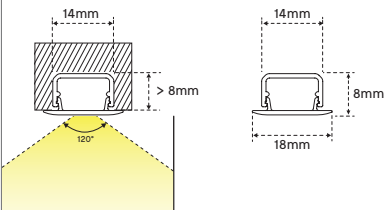
** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mec -1 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH . PIR SENSOR	. RIGHT . LEFT
Mec -2 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . TOUCH . PIR SENSOR	. RIGHT . LEFT
Mec -3 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH . PIR SENSOR	. RIGHT . LEFT
Mec -4 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . TOUCH . PIR SENSOR	. RIGHT . LEFT
Mec -5 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . TOUCH . PIR SENSOR	. RIGHT . LEFT
Mec Corner (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2.5m COVER: 2.5m	. 5mm . 10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	N.A.	N.A.
Mec Eco (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2.5m COVER: 2.5m	. 5mm . 10mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	. WOOD . METAL	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.






The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mec Malindi (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 2.5m COVER: 2.5m	. 5mm . 10mm	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Micro Mec -1 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -1 (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -2 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -3 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -3 (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, an external L&S controller can also be used as an alternative.



STRIP REEL

SUITABLE FOR L&S PROFILE

WHY CHOOSE THE L&S STRIP REEL

PERCHÉ SCEGLIERE LE STRIP REEL DI L&S

- \\ High **energy efficiency**.
Alta **efficienza energetica**.
- \\ Copper tracks with **higher thickness** (2OZ) for optimal heat dissipation and homogeneous light illuminance over the entire length of the strip.
Piste in rame con **spessore maggiore** (OZ) per una dissipazione di calore ottimale e un'illuminazione omogenea lungo tutta la lunghezza della strip.
- \\ CRI80, available **CRI90**. Colours are more natural thanks to the high colour rendering.
CRI80, disponibile in **CRI90**. I colori sono più naturali grazie all'alta resa cromatica.
- \\ 3-step McAdam. No binning management.
3-step McAdam. Nessuna gestione del binning.
- \\ Plug-and-Play LS5/10 connectors for **connections without welding operations**.
Connettori LS5/10 Plug-and-Play per **connessioni senza operazioni di saldatura**.
- \\ Fixing with **3M adhesive double-tape** (200MP).
Fissaggio tramite **biadesivo 3M** (200MP).
- \\ Possibility to **be cut**.
Possibilità di **essere tagliata**.
- \\ High **luminous efficiency** (+ 85Lu/W).
Alta **efficienza luminosa** (+ 85Lu/W).
- \\ Available at **12VDC** and **24VDC**.
Disponibile a **12VDC** e **24VDC**.
- \\ Available with **Emotion technology**. The colour of the light can be changed from Warm White (2700K) to Cold White (6500K) or from Warm White (3000K) to Natural White (4000K) Emotion Dual Color (EDC).
Disponibile con **tecnologia Emotion**. La temperatura colore può essere cambiata da Calda (2700K) a Fredda (6500K) oppure da Calda (3000K) a Naturale (4000K) per Emotion Dual Color (EDC).
cULus certified.
- \\ Certificate **cULus**.
Available in **sheathed version** for protection against humidity and dust.
Disponibile in **versione inguainata** per la protezione contro umidità e polvere.

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

STANDARD STRIP REEL



WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP. (K)	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
4	3.8m	. 770 . 820	>80	. 3000 . 3800 - 4500	50.0	. 1789017 . 1789119	12	100	9.6
5	. 3.3m @ 12V . 6.5m @ 24V	1000	>80	. 3000 . 4000	. 16.7 @ 12V . 33.4 @ 24V	. AN @ 12V . AM @ 24V	. 12 . 24	180	11.0
5	6.5m	1000	>90	. 2700 . 3000 . 4000	25.2	BP	24	280	11.0
6	7.2m	. 1071 (1809*) . 1028 (1817*) * AFTER SILICONE	>80	. 3000 . 4000	N.A.	. 2000630 . 2000631	24	120	10.0
8	15.0m	245	>80	3200	100.0	1789281	12	30	2.4
8	7.5m	430	>90	2700	50.0	2000238	12	60	4.8
8	7.5m	. 430 . 430 . 530	>90	3000	50.0	. 2000235 . 2000239 . 1789132	12	60	4.8
8	7.5m	. 430 . 430 . 530	>90	4000	50.0	. 2000236 . 2000240 . 1789142	12	60	4.8
8	7.5m	. 430 . 430 . 530	>90	4000	50.0	. 2000236 . 2000240 . 1789142	12	60	4.8
8	7.5m	. 430 . 530	. >90 . >80	. 6200 . 6500	50.0	. 2000241 . 1789310	12	60	4.8
8	7.5m	. 419 . 450 . 488	. >90 . >80 . >80	. 2800 - 3200 . 3800 - 4200 . 6000 - 6500	50.0	. 1789309 . 1789391 . 1789321	12	60	4.8
8	15.0m	. 414 . 390	. >80 . >80	. 3000 . 3800 - 4200	100.0	. 1789311 . 1789389	24	60	4.8
8	5.0m	650	>90	. 2700 . 3000 . 4000	33.0	. 2000242 . 2000243 . 2000244	12	. 90 . 90 . 80	7.2
8	10.0m	. 650 . 634 . 650	>90	. 2700 . 3000 . 3000	50.0	. 2000263 . 1788464 . 2000264	24	120	7.2
8	10.0m	650	>90	4000	50.0	. 2000265 . 1788465	24	120	7.2
8	10.0m	650	>90	6200	50.0	. 1788466 . 2000266	24	120	7.2
8	10.0m	. 632 . 658	>90	. 4000 . 6200	25.0	. 1788469 . 1788470	24	240	7.2
8	3.8m	840	. >90 . >80 . >90	. 2700 . 3000 . 3000	25.0	. 2000250 . 2000251 . 2000247	12	120	9.6
8	3.8m	. 1120 . 840	. >80 . >90	4000	25.0	. 1789900 . 2000252	12	120	9.6
8	3.8m	. 840 . 1880	. >90 . >80	. 6200 . 6500	. 25.0 . 50.0	. 2000253 . 1789409	12	120	9.6

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

STANDARD STRIP REEL



WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP. (K)	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
8	7.5m	840	>90	. 2700 . 3000	50.0	. 2000267 . 2000268	24	120	9.6
8	7.5m	840	>90	4000	50.0	2000269	24	120	9.6
8	7.5m	840	>90	6200	50.0	2000270	24	120	9.6
10	. 4.6m @ 12V . 9.2m @ 24V	750	>80	. 3000 . 4000 . 6500	. 41.7 @ 12V . 83.4 @ 24V	. G @ 12V . N @ 24V	. 12 . 24	72	7.8
10	. 3.1m @ 12V . 6.2m @ 24V	1000	>80	. 3000 . 4000 . 6500	. 27.8 @ 12V . 55.6 @ 24V	. C @ 12V . M @ 24V	. 12 . 24	108	11.7
10	. 2.1m @ 12V . 4.3m @ 24V	1400	>80	. 3000 . 4000 . 6500	. 19.3 @ 12V . 38.5 @ 24V	. E @ 12V . I @ 24V	. 12 . 24	156	16.9
10	7.5m	408	. >80 . >90	3000	50.0	. 1789131 . 1789130	12	60	4.8
10	7.5m	. 407 . 432	. >80 . >90	4000	50.0	. 1789120 . 1789141	12	60	4.8
10	7.5m	. 519 . 416 . 452	>80	. 6500 . 6500 . 6000 - 6500	50.0	. 1789305 . 1789100 . 1789322	12	60	4.8
10	. 2.3m @ 12V . 4.6m @ 24V	. 1705 @ 12V . 1521 @ 24V	>80	4000	. 25.0 @ 12V . 50.0 @ 24V	. 1788200 . 1788400	. 12 . 24	120	15.5
10	. 1.9m @ 12V . 3.8m @ 24V	. 1968 @ 12V . 1970 @ 24V	>80	3000 - 3500	. 12.5 @ 12V . 25.0 @ 24V	. 1789416 . 1789316	. 12 . 24	240	19.2
10	3.8m	2180	>80	4000 - 4500	25.0	1789315	24	240	19.2
10	3.8m	2250	>80	6000 - 6500	25.0	1789314	24	240	19.2

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

EMOTION STRIP REEL



WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP. (K)	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
5	. 2.8m @ 12V . 5.5m @ 24V	1000	>90	2700 ÷ 6500	. 25.0 @ 12V . 50.0 @ 24V	. AV @ 12V . AS @ 24V	. 12 . 24	120 + 120	13.0
6	10.0m	582 - 627	>90	2700 ÷ 6500	50.0	. 1788425 . 1788426	24	120 + 120	7.2
6	4.6m	595 - 663	>90	2700 ÷ 6500	33.3	1788524	12	90 + 90	7.8
7.5	13.3m	170 - 185 PER PCS.	>80	2700 ÷ 6500	N.A.	1770720	12	30 + 30	2.7 PER PCS.
8	7.5m	. 478 - 438 . 420 - 398 . 529 - 485	>80	. 3000 ÷ 6500 . 2700 ÷ 6500 . 3000 ÷ 6500	. N.A. . 50.0 . N.A.	. 1789218 . 1788403 . 1789219	12	. 57 + 57 . 60 + 60 . 63 + 63	4.8
8	. 18.8m . 15.0m	. 201 - 185 . 280 - 300	>80	. 3000 ÷ 6500 . 2800 ÷ 6000	N.A.	. 1789216 . 5990272	12	. 56 + 56 . 36 + 36	. 1.9 . 2.4
8	. 5.0m @ 12V . 10.0m @ 24V	. 720 . 660 - 780	>90	2700 ÷ 6500	. 25.0 @ 12V . 50.0 @ 24V	. 2000255 . 1788615	. 12 . 24	120 + 120	7.2
8	4.6m	800 - 850	>80	3000 ÷ 6500	25.0	1788605	12	120 + 120	7.8
8	4.6m	. 700 - 800 . 656 - 664 . 684	. >80 . >80 . >90	2700 ÷ 6500	50.0	. 1788603 . 1788203 . 2000256	12	60 + 60	7.8
8	9.2m	. 628 - 653 . 730 . 730	. >80 . >90 . >90	2700 ÷ 6500	100.0	. 1788207 . 2000277 . 1788404	24	60 + 60	7.8
8	4.6m	. 518 - 622 . 1464	>90	2700 ÷ 6500	. 25.0 @ 12V . 50.0 @ 24V	. 1788060 . 2000275	. 12 . 24	120 + 120	. 8.0 . 15.5
10	. 2.8m @ 12V . 5.5m @ 24V	1000	>80	2700 ÷ 6500	. 25.0 @ 12V . 50.0 @ 24V	. F @ 12V . AO @ 24V	. 12 . 24	120 + 120	13.0
10	11.7m	256 - 279 PER PCS.	>90	2700 ÷ 6500	50.0	1788640	12	120 + 120	3.1 PER PCS.
10	5.0m	. 711 - 767 - 154 . 688 - 698 - 157	>80	2700 ÷ 6500	33.0	. 1788204 . 1788205	12	90 + 90 + 90	7.2
10	5.0m	650 - 700	>80	2700 ÷ 6500	25.0	1788608	12	120 + 120	7.2
10	4.6m	800 - 850	>80	3000 ÷ 6500	25.0	1788604	12	120 + 120	7.8
10	2.4m	1667 - 1734	>80	2700 ÷ 6500	25.0	1788416	12	120 + 120	15.3
10	2.3m	1400 - 1500	>80	2700 ÷ 6500	25.0	1788602	12	120 + 120	15.5
10	4.6m	. 1339 - 1437 . 1500 - 1600	>80	2700 ÷ 6500	50.0	. 1788206 . 1788606	24	120 + 120	15.5
13	3.6m	1012 - 970	>80	2700 ÷ 6500	N.A.	. 1788005 . 1788003 . 1788002	12	90 + 90	10.0

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

EMOTION DUAL COLOR STRIP REEL



WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP. (K)	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
5	. 2.8m @ 12V . 5.5m @ 24V	1000	>80	3000 ÷ 4000	. 25.0 @ 12V . 50.0 @ 24V	. AD @ 12V . AE @ 24V	. 12 . 24	120 + 120	13.0
5	. 2.8m @ 12V . 5.5m @ 24V	1000	>90	3000 ÷ 4000	. 25.0 @ 12V . 50.0 @ 24V	. AU @ 12V . AP @ 24V	. 12 . 24	120 + 120	13.0
8	4.3m	1667 - 1759	>80	2700 ÷ 4000	50.0	1788417	24	120 + 120	16.8
10	. 2.8m @ 12V . 5.5m @ 24V	1000	>80	3000 ÷ 4000	. 25.0 @ 12V . 50.0 @ 24V	. AG @ 12V . AH @ 24V	. 12 . 24	120 + 120	13.0
10	4.7m	1667 - 1759	>80	2700 ÷ 4000	50.0	1788415	24	120 + 120	15.3

RGBW STRIP REEL



WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP. (K)	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
12	0.3m	. 2973 . 5449 . 1932	N.A.	N.A.	6.9	1788324	5	144	43.0

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

BLUE LIGHT, UV-A & UV-C LIGHTING SOLUTIONS AGAINST BACTERIA AND VIRUS

L&S is committed to providing its customers with innovative and marketable business solutions on a global scale.

Recent investments in the development of the internal R&D laboratory, in addition to having brought significant benefits in reducing product certification time frame, have made the possibility to study the effects of "Blue Light" and "UV" light in various application areas.

The constant attention towards new integrated lighting solutions, designed to improve the experience of those who live for both domestic and professional interior spaces, aims to make the places where we spend most of our time comfortable and safe.

Today, looking to the growing interest in sanitizing environments, L&S extends its "Lighting Intelligence" program by offering a selection of linear lamps equipped with specific LED modules which, in a single solution, allow you to alternate white light and bactericidal function, without the need for external devices.

SOLUZIONI DI ILLUMINAZIONE CONTRO BATTERI E VIRUS

L&S si impegna a fornire ai propri clienti soluzioni di business innovative e commercializzabili su scala globale.

I recenti investimenti nello sviluppo del laboratorio interno di ricerca e sviluppo, oltre a portare significativi benefici nella riduzione dei tempi di certificazione dei prodotti, hanno reso possibile studiare gli effetti della "Blue Light" e della luce "UV" in varie aree di applicazione.

La costante attenzione verso nuove soluzioni di illuminazione integrata, volte a migliorare l'esperienza di chi vive gli spazi interni sia domestici che professionali, ha lo scopo di rendere gli ambienti in cui trascorriamo la maggior parte del nostro tempo confortevoli e sicuri.

Oggi, guardando al crescente interesse per la sanificazione degli ambienti, L&S estende il suo programma "Lighting Intelligence" offrendo una selezione di lampade lineari dotate di moduli LED specifici che, in un'unica soluzione, consentono di alternare la luce bianca e la funzione battericida, senza la necessità di utilizzare apparecchi esterni.

STANDARD



UV-A 405 nm

Light source with fixed emission UV-A 405 nm.

Sorgente a emissione fissa UV-A 405 nm.



Dual UV-A

Light source with switchable emission of UV-A 405 nm and Natural White 4000K.

Sorgente a doppia emissione UV-A 405 nm e bianco naturale 4000K.



Dual Blue

Light source with switchable emission Blue Light 465 nm and Natural White 4000K.

Sorgente a doppia emissione Blue Light 465 nm e bianco naturale 4000K.

CUSTOM



UV-A + TiO₂

Bespoke solutions that take advantage of the combination of UV-A light and titanium dioxide for air purification in indoor environments.

Soluzioni su misura che sfruttano la combinazione tra luce UV-A e biossido di titanio per la purificazione dell'aria negli ambienti interni.











UV-C

Bespoke solutions with UV-C LEDs for the maximum antimicrobial efficacy in professional environments.

Soluzioni su misura con LED UV-C per la massima efficacia antimicrobica in ambienti professionali.















BLUE LIGHT, UV-A & UV-C

PRODUCT RANGE

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	UV LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Bali (aluminum)  SURFACE MOUNTED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Insider (aluminum)  SURFACE MOUNTED 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm 	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	WOOD	PIR SENSOR	. RIGHT . LEFT
Kendo (plastic)  RECESSED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm 	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	IR SWITCH	. RIGHT . LEFT
Kiton (aluminum)  SURFACE MOUNTED 	NO	1800mm	5mm 	OPAL	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR DOOR	. RIGHT . LEFT . RIGHT & LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.
The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.








** without a built-in controller, a specific SMART L&S Switch or PIR controller must be used as an alternative.

PRODUCT NAME		DAISY CHAIN*	MAX. LENGTH	UV LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Malindi2 (aluminum) 	RECESSED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm 	OPAL . TRANSPARENT	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec -1 (aluminum) 	SURFACE MOUNTED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec -2 (aluminum) 	RECESSED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec -3 (aluminum) 	SURFACE MOUNTED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec -4 (aluminum) 	RECESSED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec -5 (aluminum) 	SURFACE MOUNTED 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	. IR SWITCH . PIR SENSOR	. RIGHT . LEFT
Mec Drawer (aluminum) 	SURFACE MOUNTED 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	. 10mm 	OPAL	STANDARD: 12-ALUMINUM CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	WOOD	IR DOOR	RIGHT

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.





** without a built-in controller, a specific SMART L&S Switch or PIR controller must be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	UV LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mec Rack (aluminum) 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: N.A.	WOOD	PIR SENSOR	. RIGHT . LEFT
Micro Mec -1 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -1 (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -2 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -3 (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	. OPAL . TRANSPARENT	STANDARD: 12-ALUMINUM CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Micro Mec -3 (plastic) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 3.0m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	. WOOD . METAL . GLASS	IR SWITCH	. RIGHT . LEFT
Mini Kendo (aluminum) 	YES	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: 01-WHITE CUSTOM: N.A.	STANDARD: TWIN CUSTOM: . SLIDING . MINITRACK	PRESSURE	N.A.	N.A.

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, a specific SMART L&S Switch or PIR controller must be used as an alternative.

PRODUCT NAME	DAISY CHAIN*	MAX. LENGTH	UV LED STRIP	SCREEN	FINISH	TYPE OF CONNECTION	TYPE OF FIXING	BUILT-IN CONTROLLER**	CONTROLLER POSITION
Mini Noor (aluminum)  SURFACE MOUNTED 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	5mm	OPAL	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: N.A.	STANDARD: TWIN CUSTOM: N.A.	PRESSURE	N.A.	N.A.
Osaka (aluminum)  SURFACE MOUNTED 	NO	STRIP: BASED ON SELECTED LED STRIP PROFILE: 4.2m COVER: 3.0m	. 5mm . 10mm	. OPAL . TRANSPARENT	STANDARD: . 03-BLACK . 12-ALUMIN. CUSTOM: ON DEMAND	STANDARD: TWIN CUSTOM: MINITRACK	WOOD	IR SWITCH	LEFT

* in the Daisy Chain configuration, only the first product can mount a controller.

The other fixtures of the chain must be without a controller. The Daisy Chain configuration is obtained by means of an external cable.

** without a built-in controller, a specific SMART L&S Switch or PIR controller must be used as an alternative.



LED strip with integrated antibacterial technology. The Dual versions alternate natural white light with Blue 465 nm or UV-A 405 nm LEDs, to be managed with the dedicated control systems.

Strip LED con tecnologia antibatterica integrata. Le versioni Dual, alternano la luce naturale con i LED Blu 465 nm o UV-A 405 nm, per essere gestiti con dei sistemi di controllo dedicati.

WIDTH (mm)	MAX LENGTH (1 Input)	ILLUMINANCE (Lumen / m)	CRI	COLOR TEMP.	CUTTING STEP (mm)	CODE NAME	VOLTAGE (VDC)	LED / m	POWER (W / m)
10	3.6m	N.A.		405nm	50	UV-A	24	120	20.0
10	5.5m	1000 @ 4000K	>90	405 nm + 4000 K	62	CH DUAL UV-A	24	96 + 96	13.0
10	5.5m	1000 @ 4000K	>80	465 nm + 4000 K	50	CF DUAL BLUE	24	120 + 120	13.0
5	5.5m	1000 @ 4000K	>90	465 nm + 4000 K	50	CG DUAL BLUE	24	120 + 120	13.0

NOTE: with opal cover the illuminance is 40% less than the nominal value, with transparent cover the illuminance is 15% less than the nominal value.

LS-LIGHT.COM

Italia

**L&S
ITALIA
S.P.A.**

Viale L. Zanussi, 8
33070
Maron di Brugnera PN
Italy

+39 0434 616611
info@ls-light.com

Germania

**L&S
DEUTSCHLAND
GMBH**

Daimlerring, 34
32289 Rödinghausen
Germany

+49 5223 8790-0
info@ls-deutschland.de

Cina

**L&S
LIGHTING
EQUIPMENT**

(Shanghai) Co., Ltd.
No.255, Longpan Rd.,
Malu Town,
Jiading District, Shanghai
China

+86 021 69156791
info@ls-light.cn

USA

**L&S
LIGHTING
CORPORATION**

1505 Pavilion Place
Suite A Norcross GA
30093
USA

+1 877 877 0757
info@ls-light.us