



Advantage® for Gutters

A single component solvent free coating system using a moisture cured hybrid coating, that is damp tolerant during application and is easily recoated. It provides excellent UV and mechanical protection while working with the thermal movement required from temperature changes that are experienced throughout the year.

Benefits

- ✓ Includes Graphene for exceptional corrosion resistance that can increase substrate life for many years
- ✓ Damp tolerant during application
- ✓ Solvent, Isocyanate and VOC Free
- ✓ Easy re-coating
- ✓ Impact resistant
- ✓ One coat application after preparation
- ✓ No shrinkage on curing
- ✓ System designed to provide minimal trafficking of the roof during application
- ✓ UV resistant
- ✓ Long term reliability
- ✓ Application temperature 3°C and 60°C
- ✓ Microporous to allow substrate to breath
- ✓ Flexible coating with elongation, to cope with thermal movement
- ✓ Minimal weight gain to roof after application
- ✓ High weather and UV resistance for this one coat system
- ✓ UK underwritten latent defect insurance



✓ **Long Product Warranty -**
30 years for metal roofs,
20 years for asbestos cement
roofs, 15 years for gutters
and cut edge corrosion

✓ **Full UK underwritten latent
defects insurance to cover
total contract value including
labour, materials and access.
Subject to Contractor Status**

✓ **Free training and CPDs
available on request**

Preparation and Cleaning

All gutters should be cleaned and debris removed before application.

Metal Gutters: Clean and dry surface thoroughly to ST2 standard, you will find this easier with a rotary cleaning head. All oil, grease and dirt must be removed prior to application. Then using a wire brush remove rust and foreign matter. Brush or roller apply one coat of Advantage® Metal Primer to any corroded surface.


Asbestos Gutters: Asbestos gutters should be cleaned in line with HSE Guidelines on working with asbestos. Note that Alltimes Coatings are not able to provide advice or guidance on handling asbestos.

Bitumen Repairs & Membrane Lined Gutters: On sound previously applied bitumen gutters, apply one coat of Advantage® OptiSeal at a coverage of approx 10m² per litre to avoid bleed. Some previous coatings will need to be removed, contact our technical department for more details. For other substrates such as EPDM, single-ply, aluminium, GRP or concrete, adhesion tests may be required.

Joints: Apply Alltimes Advantage® Sealant to all joints and tool immediately wet on wet by brushing with Advantage® for Gutters to avoid creating a ridge, ensure all joint bolts are encapsulated. If there is a risk of movement, joints will need a fleece embedded in the coating across the joints.

Application

Apply one coat of Advantage® for Gutters by brush or roller at a coverage of 2m² per Litre to give a thickness of 500 microns. Pay particular attention to fixings to ensure they are fully encapsulated.

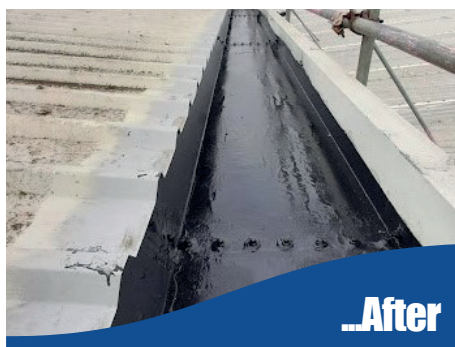

Technical Data

Form:	Viscous coloured liquid
Coverage:	2m ² per 1L
Pack Size:	5 & 15 Litres
Shelf Life:	12 months
Temp. Limits:	3°C - 60°C

Components

- Advantage® Metal Primer:
1L & 2.5L Tins
- Advantage® Sealant:
310ml Tube
- Advantage® OptiSeal Sealing Primer:
5L Kit Part A & Part B
- Advantage® for Gutter:
5L Tins

ALLTIMES COATINGS

Alltimes Coatings, Units C & D,
Station Road Industrial Estate,
South Woodchester, Stroud,
Gloucestershire. GL5 5EQ. UK

T: 01453 872 850

E: info@alltimescoatings.co.uk

W: www.alltimescoatings.co.uk

No responsibility can be taken by the manufacturers where conditions of use are beyond our control. All products should be used in accordance with the manufacturer's instructions. For further information please refer to the application guide and Material Safety Data Sheet. This information and guidance is given in good faith and without prejudice and liability, Technical and Safety Data must be observed. All coverages are given as a guide only, as volumes will vary with profile, porosity and method of application. Loss factors should also be taken into account.